




TIPS/MPORTANT:  
Allsafety and operation instructions should be read thoroughly before proceeding and please keep the handbook for future reference.

- 1、Product Feature
- M9 is a multi-functional Bluetooth electronic Alarm Clock Speaker
- Functions as follows
- Bluetooth Wireless speaker, Bluetooth Wireless Call
  - Large screen Clock display
  - Double Alarm Clock function, Sound volume adjustable and Snooze function
  - 3.5mm audio playing
  - Dual USB ports for External charging
  - Real time temperature display
  - LCD display brightness setting
  - Week display
  - FM Radio function
- 2、What' s included
- (Please carefully check the products and accessories in the package after purchase)
- ①M9Maindevice 1 set
  - ②Audiocable 1PCS
  - ③PowerAdaptor 1 pcs
  - ④UserManual 1PCS
  - ⑤ButtonCell Battery 1pcs

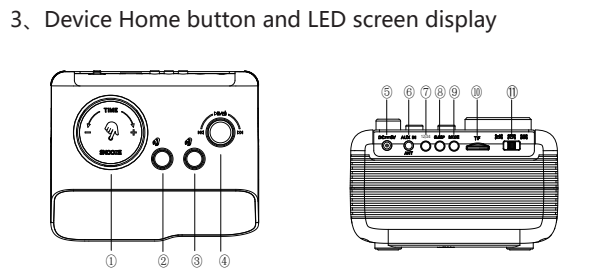

- ① Big rotation encode button: Time and Alarm clock setting, LED brightness and volume adjustable
- ② Alarm1:setting button,turnon/off alarm1
- ③ Alarm2:setting button,turnon/off alarm2
- ④ Small rotation button(potentiometer) Play the last song and the last radio channel, Play and pause, the radio will automatically search the channel, play next song and next channel on the radio .
- ⑤ DC5V Power socket
- ⑥ 3.5mm audio output
- ⑦ 12/24 hour mode setting and alarm volume adjustment
- ⑧ Sleep timer setting (sleep function), temperature Fahrenheit / Celsius switchable
- ⑨ Function switching: Bluetooth, radio, audio, TF, USB
- ⑩ TF card slot: play music, alarm clock rings storage
- ⑪ Alarm clock ring selection
- ⑫ Real-time temperature sensor
- ⑬ call MIC
- ⑭ USB charging port
- ⑮ USB charging port and USB play
- ⑯ Button cell battery bin

- 4、Instructions for use
- 4.1、Clock settings
- Long press the top large rotation button to enter the alarm setting. At this time, the symbol flashes on the

screen,and turn the large rotation button to adjust the Hour. Short press to confirm and enter the alarm week setting,At this time, the symbol flashes on the week. Short press to confirm and finish the time adjustment. Long press the 12/24 button to switch time mode between 12hours mode and 24 hours mode.

- 4.2、Alarm clock Setting and using
- On and off setting

Short press Alarm 1 or Alarm 2 to turn the alarm on and off. The screen will display the time of the set alarm When the alarm clock is turned on, the corresponding alarm symbol to indicate alarm clock is on.The alarm clock symbol will disappear when the Alarm 1 or Alarm 2 is turned off.

- Alarm 1 setting

Alarm 1 is a long-term alarm clock.Long press the top Alarm 1 button to enter the alarm setting, At this time, the symbol flashes on the screen and the alarm clock hour start to flash,turn the large rotation button to adjust the time, short press the alarm clock 1 to confirm and enter the alarm week setting,and turn the large rotation to select alarm week mode. (Monday to Friday, Monday to Saturday or Monday to Sunday), short press alarm 1 to Confirm and finish the setting.

- Alarm 2 setting
- Alarm ring tone and volume setting

Choosing the source of three different alarm ringtones by adjusting the slide switch on the back , Radio , Built-in ring tone , TF card soundsource

(need to insert TF card) as the alarm tone,The selected alarm tone is played when the alarm ring out. Long press 12/24 and turn the large rotation button to adjust the alarm volume.

- Snooze function
- Alarmoff setting

After the alarm rings, press large rotation button to turn on the snooze function. The alarm will stop and will sound again after 5 minutes.

After the alarm rings, short press the corresponding alarm button to turn off the alarm. If the alarm isn't turned off, it will automatically turn off after ringing for 60 minutes.

4.3 Function conversion and use (Turn the large rotation button to adjust the volume)

Short press the MODE buttonat the back of the alarm clock to switch the following function mode: Bluetooth , radio , audio ,TF playback , USB playback , Turn off the function. The corresponding alarm symbol to indicate alarm clock is on by switching different function. Long press to close the function.

- Bluetooth wireless settings
- USB mode
- Sleep function (SLEEP)

To switch to Bluetooth mode, the Bluetooth icon flash on the screen, Bluetooth devices such as mobile phones can be connected to the alarm clock M9,In Bluetooth mode, you can use the M9 alarm clock as a speaker when paired with your mobile phone. When a phone call comes in, short press the small rotation button for Bluetooth wireless calls.Double-click small rotation button to dial back call someone back.

To switch to radio mode, Long press the small rotation button for 2 seconds to enter automatic channel search. The search frequency is between 87.5MHz ~ 108MHz.

After the automatic channel search completes, it will return to the first channel.

You can turn the small rotation button left or right the previous song, pause, or the next song to select the channels and status. You can search a channel manually and play by Rotating the small rotation left and right for 2 seconds (Use the attached audio cable to the ANT jack at the back of the alarm clock works as the FM radio antenna )

- AUX connection and playback

To select AUX mode, short press the MODE button until you see the AUX icon . Use the attached 3.5MM audio cable to the AUX jack at the back of the alarm clock and then connect the other end of the audio cable to another device.

- TF card mode

To switch to TF mode, short press the MODE button until you see the TF icon, You can play MP3 format files in the TF card after inserting a TF card into the card slot. Turn the small rotation button left or right to switch audio file content inside (TF card limit capacity to32G).

To switch USB mode,short press the MODE button until you see the icon flashes, Insert U disk at the USB port (icon )as shown on the 2th page, you can play MP3 files in U disk, Turn the small rotation button left or right to switch audio file content inside (U disk limit capacity to 32G)

To switch sleep function ,short press the SLEEP button to turn on and start the sleep function when alarm clock on status. At this time, the SLEEP icon flash and displays 15 characters. Continue to press this SLEEP button to adjust

the sleep time, in turn: 15, 30, 45, 60, 75, 90 minutes for selection ,after selecting the timer duration, the clock will automatically return to the time display in 5 seconds. Short press SLEEP button to check the remaining sleep time. When the set time comes, the machine will automatically turn off the function.

- 4.4、USB charging
- This product provides 2 USB charging ports, which can charge 2 additional USB devices at the same time.(not including provide charging cable)

- 4.5、LED night light brightness setting
- Short press the large rotation button on the LED screen to adjust night light brightness (Off ~ Low ~ Medium ~ High )

- 4.6、Temperature display setting
- The built-in temperature sensor is monitoring the external ambient temperature,long press the SLEEP button on the LED screen to switch between Celsius and Fahrenheit.

- 4.7、Battery use
- Please follow the direction of the arrow to rotate the bottom battery cover until opened, and insert the attached battery (the negative pole side set in inside). Close the battery cover on the back.

- 5、Attention
- This battery cannot support the normal use of the alarm clock, only memorizes previously set time mode when adaptor power is off, so that there is no need to readjust the time mode when adaptor power available.
- ※ Only support 3v cr 2032 battery

