


## Fitting/replacing bulbs

- When changing a bulb, always switch off at the mains and allow the bulb to cool before handling.
- Used bulbs should not be disposed of with household waste. Please recycle where facilities exist. Always use the correct type and wattage bulb. Using the incorrect wattage bulb will damage the bulb and ballast.
- Remove the grill from the product, undo the spade connector and set aside. Twist 90 degrees and remove from slots to remove.
- Refit by locating the pins in the lampholder slots, and twisting 90 degrees to engage the pins with the contacts. Refit the grill back into position, remembering to refit the earth connector.



We recommend cleaning with a soft dry cloth.

Do not use solvents or abrasive cleaners as these could damage the finish.

Shade – Use a damp cloth. Do not use abrasive materials as these will damage the finish.

## Recycling advice



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

## Safety information

**Live Voltages may be present in this unit even when turned off or when completely disconnected.** For your safety, always switch off the supply before changing lightbulbs, or cleaning.

## Instruction leaflet

# Flat

10705, 10705EM3



saxby  
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

## Warning

**This light fitting is Class 1 and must be connected to an Earth circuit.**

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.

This light fitting should be connected to a fused circuit.

If replacing an existing fitting, make a careful note of the connections.

Always use the correct type and wattage bulb. Using the incorrect wattage bulb will damage the bulb and ballast.

When changing a bulb, always switch off at the mains and allow the old bulb to cool down before handling.

Dispose of used bulbs carefully and responsibly.

This product is not suitable for dimming.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

## Specification

Voltage: 240V 50Hz a.c.  
Lamp: 2 x 35W T5 Fluorescent  
IP rating: 20

## Layout

- Plan the desired layout of this fitting carefully, ensuring the cables will reach the distance between the junction box and the light fitting.
- Avoid locating any cables in positions that would cause a hazard. Position cables and junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged.
- The mains supply cable must have a minimum cross sectional area of 1.0mm<sup>2</sup>.
- This unit can be surface mounted or can be fitted to a suspension kit (13861) available separately. For the suspension kit fitting, please refer to the instruction provided with that product.
- The plate on the top of the unit can be removed when the suspension kit is used to allow indirect lighting.

## Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, **carefully note the position of each set of wires.**


- Remove the grill from the product, undo the spade connector and set aside.
- With an assistant, hold the product in place and mark the position of the holes.

- Ensure the ceiling is capable of holding the weight of the product. Take care to avoid damaging any concealed wiring and pipes. The correct fixings should be used for brick, cavity walls or plasterboard.
- Fix into position.
- Wire as detailed below.

## Wiring

Having correctly identified the wiring from your existing light fitting, pull the wire through the hole and connect to

the connection block inside the product in the following way:

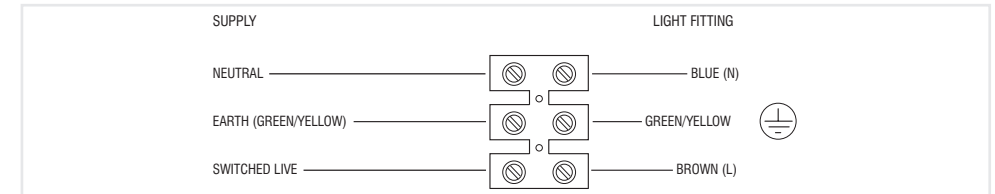

## Check that...

- You have correctly identified the wires
- The connections are tight
- No loose strands have been left out of the connection block.

## Commissioning

- Refit the grill back into position, remembering to refit the earth connector.
- Replace fuse or circuit breaker and switch on. Your light is now ready for use.