

# KUZCO LIGHTING

## LUMINAIRE PHOTOMETRIC REPORT

**Filename:** AT68006-WH - Slate

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** WALL SCONCE/ WALL MOUNT

**Luminaire Cat:** AT68006-WH-DC-LED

**Lamp:** DC LED

**Lamp Cat:** N/A

**Ballast Desc:** INPUT: 120VAC, 0.16A (MAX); OUT: 30-42VDC, 160mA 50/60Hz

**Ballast Cat:** NE007040016-6G

**Lamp Output:** Total luminaire Lumens: 449.3

**Max Candela:** 175.2 at Horizontal: 0°, Vertical: 0°

**Input Wattage:** 7.2

**Luminous Opening:** Rectangle w/Luminous Sides (L: 1.61", W: 6.14", H: 5.47")

**Test:** 1953-22

**Test Date:** 21 June 2022


**Test Lab:** KUZCO LIGHTING

**Photometry :** Type C

**CIE Class:** Direct

**Cutoff Class:** Cutoff

**Nema Type:** 7 X 7


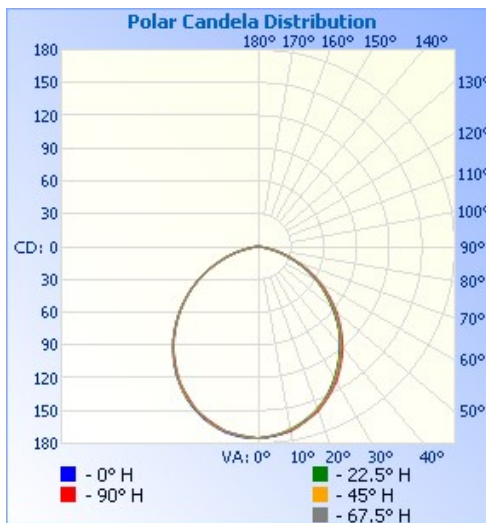


### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	133.0	29.6%
0-40	215.0	47.9%
0-60	367.5	81.8%
60-90	76.6	17%
70-100	28.4	6.3%
90-120	2.3	0.5%
0-90	444.0	98.8%
90-180	5.3	1.2%
0-180	449.3	100%

### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	16.5	3.7%	90-100	0.7	0.2%
10-20	46.8	10.4%	100-110	0.8	0.2%
20-30	69.8	15.5%	110-120	0.8	0.2%
30-40	82.0	18.3%	120-130	0.7	0.2%
40-50	82.1	18.3%	130-140	0.7	0.2%
50-60	70.3	15.6%	140-150	0.6	0.1%
60-70	48.8	10.9%	150-160	0.5	0.1%
70-80	23.1	5.1%	160-170	0.3	0.1%
80-90	4.6	1.0%	170-180	0.1	0%

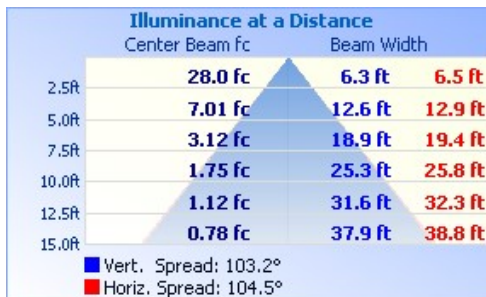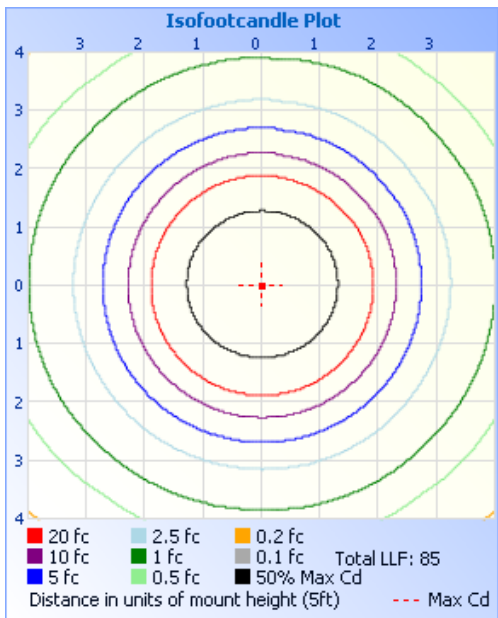

Photometrics Pro 1.3.29 copyright 2003-2022 by jSolutions, Inc.  
Reported data calculated from manufacturer's data file, based on IES recommended methods.