

# INSTALLATION INSTRUCTIONS

## For Wall Mount Fixture

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .**

### MOUNTING THE FIXTURE

#### Installation (see fig.1)

1. Disconnect power at main electrical panel before installation.
2. While holding the fixture body(G) towards the wall, follow wiring instructions carefully (see fig.2)
3. Slide the cover(A) to back until becoming, thread the two box screws about 1/4" into the pre-drilled holes in the mounting plate. The side of the mounting plate marked "GND" must face out.
4. Slide the cover(A) and peg(F) to the wall, using the screw(E) by turning it clockwise until tight.
6. Raise the glass shade(C) to bottom of the lamp socket(B), and using the ring(D) by turning it clockwise until tight.
7. Install the light bulbs in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**

#### Wiring (see fig.2)

1. Connect the electrical wires as follows. Connect the Black wire from the fixture to the black house (hot) Wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the mounting plate.
2. Tuck the wire connections neatly into the wall junction box.

Fig.1

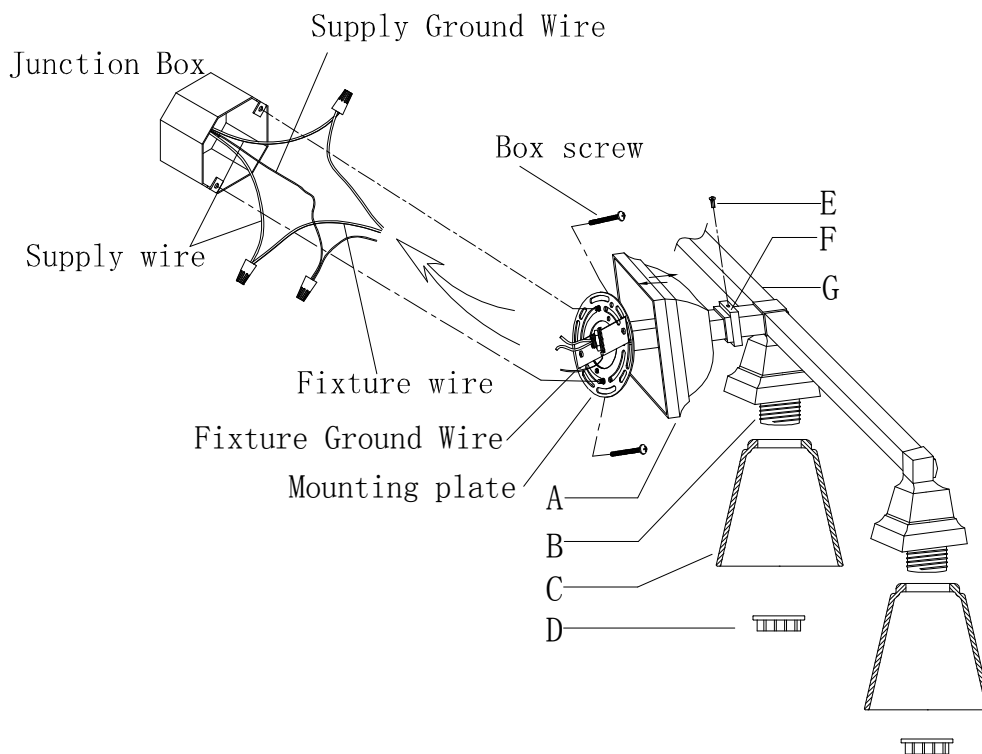


Fig.2

<p>FIXTURE WIRES</p> <p>Black or Smooth</p>	<p>HOUSE WIRES</p> <p>Black (Hot)</p>	<p>FIXTURE WIRES</p> <p>White or Ribbed</p>	<p>HOUSE WIRES</p> <p>White (Neutral)</p>	<p>FIXTURE WIRES</p> <p>Bare Copper (Ground)</p>	<p>HOUSE WIRES</p> <p>Green or Bare Copper (Ground)</p>
---	---------------------------------------	---	---	--	---



Listed