MOEN[®]

DESCRIPTION

- Metal construction with various finishes identified by suffix OPERATION
- Temperature operates through an 270° arc of handle travel (full cold to full hot)
- Adjustable temperature limit stop to control maximum hot water temperature
- 90° rotation of transfer valve handle with stops
- Pressure balancing mechanism maintains selected discharge temperature to ± 3°


STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1
- ADA for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations

Specifications




RIZON™ POSI-TEMP® with Built-In 3 Function Transfer Valve Trim

Models: T2810 series


Fits Valves: 2521

25512571

2581



 ${\it Refer to valve specification sheet for cutout dimensions}$

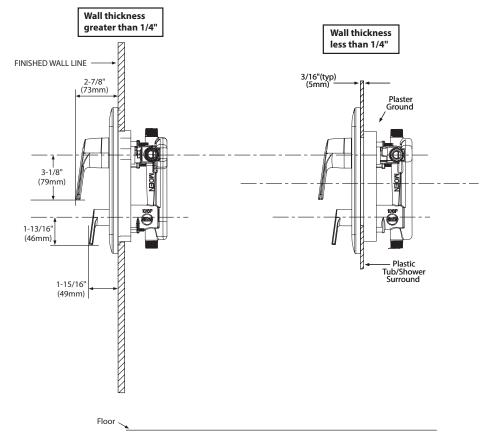

CRITICAL DIMENSIONS

(DO NOT SCALE)