



SHOWER DOORS BATHTUB DOORS SHOWER ENCLOSURES SHOWER PANEL SYSTEMS



SHOWER PANEL SYSTEMS

SHOWER PANEL SYSTEM:
LSP1-B



LSP1-B SHOWER PANEL SYSTEM

- Stainless steel construction
- Brushed nickel finish
- Stainless steel rain shower head
- Brass hand shower
- Brass tub spout
- 6 adjustable solid brass massage jets
- Thermostatic volume valve control
- Hot and cold water integrated thermostatic valve controls
- 3 independently function valve controls
- 59" stainless steel flexible hand shower hose
- Stainless steel water-in supply hoses
- 1/2" standard plumbing connection
- Wall or corner installation (mounting brackets included)
- Pre-plumbed ready
- EZ installation



LSP2-B SHOWER PANEL SYSTEM

- Shower panel system
- Stainless steel construction
- Brushed nickel finish
- Stainless steel rain shower head
- Brass hand shower
- Brass tub spout
- 6 adjustable solid brass massage jets
- Thermostatic volume valve control
- Hot and cold water integrated thermostatic valve controls
- 59" stainless steel flexible hand shower hose
- Stainless steel water-in supply hoses
- 1/2" standard plumbing connection
- Wall or corner installation (mounting brackets included)
- Pre-plumbed ready
- EZ installation



LSP3-B SHOWER PANEL SYSTEM

- Stainless steel construction
- Brushed nickel finish
- Stainless steel rain shower head
- Brass hand shower finished in chrome
- 2 horizontal spray massage zones finished in chrome
- Thermostatic volume valve control
- Hot and cold water integrated thermostatic valve controls
- 3 independently function cartridge valve controls
- 59" stainless steel flexible hand shower hose
- Stainless steel water-in supply hoses
- 1/2" standard plumbing connection
- Wall or corner installation (mounting brackets included)
- Pre-plumbed ready
- EZ installation



LSP5-C SHOWER PANEL SYSTEM


- Professional grade ABS
- Chrome finish
- Hand shower finished in chrome
- 4 adjustable spray massage jets finished in chrome
- Hot and cold water integrated thermostatic valve controls
- 57" flexible hand shower hose
- Stainless steel water-in supply hoses
- 1/2" standard plumbing connection
- Wall installation (mounting bracket is included)
- Pre-plumbed ready
- EZ installation

BATHTUB DOORS



ULTRA A BATHTUB DOORS

- Bypass sliding glass doors
- Guide rail may be shortened up to 4"
- Glass thickness: 3/8" (10 mm)
- Glass type: clear tempered
- 2 bypass sliding glass doors
- Construction: framed
- Mounting type: roll barrels on a rail
- 2 towel bars
- No out-of-plumb (vertical) adjustment
- Hardware: stainless steel/aluminum
- Threshold size requirement: min 1 3/4"
- Intended use: residential, indoor




MODEL

	INSTALLATION WIDTH W	INSTALLATION HEIGHT H	SHOWER DOOR WALK-IN I	GLASS DOOR D	HARDWARE FINISH
LBTDA6062-C	56-60"	62"	21 5/8-25 5/8"	31 5/8"	CHROME
LBTDA6062-B	56-60"	62"	21 5/8-25 5/8"	31 5/8"	BRUSHED NICKEL

REVERSIBLE INSTALLATION
(for left or right door opening)

INSTALLATION EXAMPLE:




Disclaimer: bathtub and shower panel system are not included



ULTRA B BATHTUB DOORS

- Sliding glass door with stationary panel
- Guide rail may be shortened up to 4"
- Glass thickness: 5/16" (8 mm)
- Glass type: clear tempered
- Frameless glass design
- Construction: semi-frameless
- Mounting type: guide rail roller
- No out-of-plumb (vertical) adjustment
- Threshold requirement: min 2 1/4"
- Reversible installation
- Hardware: stainless steel/aluminum
- Intended use: residential, indoor




MODEL

	INSTALLATION WIDTH W	INSTALLATION HEIGHT H	SHOWER DOOR WALK-IN I	GLASS DOOR D	STATIONARY PANEL P	HARDWARE FINISH
LBTDB6062-C	56-60"	62"	22 1/2-26 1/2"	32 5/8"	28 7/8"	CHROME
LBTDB6062-B	56-60"	62"	22 1/2-26 1/2"	32 5/8"	28 7/8"	BRUSHED NICKEL

REVERSIBLE INSTALLATION
(for left or right door opening)

INSTALLATION EXAMPLES:




Disclaimer: bathtub and shower panel system are not included



ULTRA C BATHTUB DOORS

- Sliding glass door with stationary panel
- Guide rail may be shortened up to 4"
- Glass thickness: 3/8" (10 mm)
- Glass type: clear tempered
- Construction: fully frameless
- Mounting type: guide rail roller
- Stainless steel guide rail
- Ultra quiet sliding operation
- No out-of-plumb (vertical) adjustment
- Reversible installation
- Hardware: stainless steel/aluminum
- Threshold requirement: min 2 3/4"
- Intended use: residential, indoor




MODEL

	INSTALLATION WIDTH W	INSTALLATION HEIGHT H	SHOWER DOOR WALK-IN I	GLASS DOOR D	STATIONARY PANEL P	HARDWARE FINISH
LBTDC6062-C	56-60"	62"	21 5/8-25 5/8"	31 5/8"	29 5/8"	CHROME
LBTDC6062-B	56-60"	62"	21 5/8-25 5/8"	31 5/8"	29 5/8"	BRUSHED NICKEL

REVERSIBLE INSTALLATION
(for left or right door opening)

INSTALLATION EXAMPLES:




Disclaimer: bathtub and shower panel system are not included



ULTRA D BATHTUB DOORS

- Sliding Glass Door with Stationary Panel
- Glass thickness: 1/2" (12 mm)
- Glass Type: Clear Tempered
- Construction: fully Frameless
- Mounting Type: Guide rail roller
- Stainless Steel Guide rail
- Ultra quiet sliding operation
- No out-of-plumb (vertical) adjustment
- Reversible installation
- Hardware Material: stainless steel
- Threshold Size Requirement: Min 3 1/4"
- Intended Use: Residential, Indoor




MODEL

	INSTALLATION WIDTH W	INSTALLATION HEIGHT H	SHOWER DOOR WALK-IN I	GLASS DOOR D	STATIONARY PANEL P	HARDWARE FINISH
LBTDD6062-C	56-60"	62"	21 5/8-25 5/8"	31 5/8"	29 5/8"	CHROME
LBTDD6062-B	56-60"	62"	21 5/8-25 5/8"	31 5/8"	29 5/8"	BRUSHED NICKEL

REVERSIBLE INSTALLATION
(for left or right door opening)

INSTALLATION EXAMPLES:




Disclaimer: bathtub and shower panel system are not included



ULTRA F BATHTUB DOORS

- Swing-out glass door
- Glass thickness: 1/4" (6 mm)
- Glass type: clear tempered
- Construction: frameless
- Mounting type: hinges
- No out-of-plumb (vertical) adjustment
- Towel bar
- Reversible installation
- Hardware: solid brass/stainless steel
- Threshold size requirement: no
- Intended use: residential, indoor




MODEL

	GLASS DOOR D	INSTALLATION HEIGHT H	HARDWARE FINISH
LBTDF3458-C	34"	58"	CHROME
LBTDF3458-B	34"	58"	BRUSHED NICKEL

REVERSIBLE INSTALLATION
(for left or right door opening)

INSTALLATION EXAMPLES:




Disclaimer: bathtub and shower panel system are not included

SHOWER DOORS

ULTRA A

SHOWER DOORS

- Bypass sliding glass doors
- Guide rail may be shortened up to 4"
- Glass thickness: 3/8" (10 mm)
- Glass type: clear tempered
- Frameless glass door design
- 2 bypass sliding glass doors
- Construction: framed
- Mounting type: roll barrels on a rail
- 2 towel bars
- No out-of-plumb (vertical) adjustment
- Hardware: stainless steel/aluminum
- Threshold size requirement: min 1 3/4"
- Intended use: residential, indoor




MODEL

MODEL	INSTALLATION WIDTH W	INSTALLATION HEIGHT H	SHOWER DOOR WALK-IN I	GLASS DOOR D	HARDWARE FINISH
LBSDA4876-C	44-48"	76"	18-22"	24 3/4"	CHROME
LBSDA4876-B	44-48"	76"	18-22"	24 3/4"	BRUSHED NICKEL
LBSDA6076-C	56-60"	76"	24-28"	30 3/4"	CHROME
LBSDA6076-B	56-60"	76"	24-28"	30 3/4"	BRUSHED NICKEL

REVERSIBLE INSTALLATION
(for left or right door opening)

INSTALLATION EXAMPLE:




Disclaimer: shower pan and shower panel system are not included

ULTRA B

SHOWER DOORS

- Sliding glass door with stationary panel
- Guide rail may be shortened up to 4"
- Glass thickness: 5/16" (8 mm)
- Glass type: clear tempered
- Frameless glass design
- Construction: semi-frameless
- Mounting type: guide rail roller
- No out-of-plumb (vertical) adjustment
- Threshold requirement: min 2 1/4"
- Reversible installation
- Hardware: stainless steel/aluminum
- Intended use: residential, indoor



MODEL

MODEL	INSTALLATION WIDTH W	INSTALLATION HEIGHT H	SHOWER DOOR WALK-IN I	GLASS DOOR D	STATIONARY PANEL P	HARDWARE FINISH
LBSDB4876-C	44-48"	76"	16 1/2-20 1/2"	26 5/8"	22 3/4"	CHROME
LBSDB4876-B	44-48"	76"	16 1/2-20 1/2"	26 5/8"	22 3/4"	BRUSHED NICKEL
LBSDB6076-C	56-60"	76"	22 1/2-26 1/2"	32 5/8"	28 7/8"	CHROME
LBSDB6076-B	56-60"	76"	22 1/2-26 1/2"	32 5/8"	28 7/8"	BRUSHED NICKEL

REVERSIBLE INSTALLATION
(for left or right door opening)

INSTALLATION EXAMPLES:




Disclaimer: shower pan and shower panel system are not included

ULTRA C

SHOWER DOORS

- Sliding glass door with stationary panel
- Guide rail may be shortened up to 4"
- Glass thickness: 3/8" (10 mm)
- Glass type: clear tempered
- Construction: fully frameless
- Mounting type: guide rail roller
- Stainless steel guide rail
- Ultra quiet sliding operation
- No out-of-plumb (vertical) adjustment
- Reversible installation
- Hardware: stainless steel/aluminum
- Threshold requirement: min 2 3/4"
- Intended use: residential, indoor



MODEL

MODEL	INSTALLATION WIDTH W	INSTALLATION HEIGHT H	SHOWER DOOR WALK-IN I	GLASS DOOR D	STATIONARY PANEL P	HARDWARE FINISH
LBSDC4876-C	44-48"	76"	16-20"	25 5/8"	23 5/8"	CHROME
LBSDC4876-B	44-48"	76"	16-20"	25 5/8"	23 5/8"	BRUSHED NICKEL
LBTD6062-C	56-60"	76"	21 5/8-25 5/8"	31 5/8"	29 5/8"	CHROME
LBTD6062-B	56-60"	76"	21 5/8-25 5/8"	31 5/8"	29 5/8"	BRUSHED NICKEL

REVERSIBLE INSTALLATION
(for left or right door opening)

INSTALLATION EXAMPLES:




Disclaimer: shower pan and shower panel system are not included

ULTRA C

SHOWER DOORS

- Sliding glass door with 2 stationary panels
- Guide rail may be shortened up to 4"
- Glass thickness: 3/8" (10 mm)
- Glass type: clear tempered
- Construction: fully frameless
- Mounting type: guide rail roller
- Stainless steel guide rail
- Ultra quiet sliding operation
- No out-of-plumb (vertical) adjustment
- Reversible installation
- Hardware: stainless steel/aluminum
- Threshold requirement: min 2 3/4"
- Intended use: residential, indoor



MODEL

MODEL	INSTALLATION WIDTH W	INSTALLATION HEIGHT H	SHOWER DOOR WALK-IN I	GLASS DOOR D	HARDWARE FINISH
LBSDC7276-C	68-72"	76"	20-24"	32 5/8"	CHROME
LBSDC7276-B	68-72"	76"	20-24"	32 5/8"	BRUSHED NICKEL

REVERSIBLE INSTALLATION
(for left or right door opening)

INSTALLATION EXAMPLES:




Disclaimer: shower pan and shower panel system are not included

ULTRA D

SHOWER DOORS

- Sliding glass door with stationary panel
- Glass thickness: 1/2" (12 mm)
- Glass type: clear tempered
- Construction: fully frameless
- Mounting type: guide rail roller
- Stainless steel guide rail
- Ultra quiet sliding operation
- No out-of-plumb (vertical) adjustment
- Reversible installation
- Hardware material: stainless steel
- Threshold size requirement: min 3 1/4"
- Intended use: residential, indoor




MODEL

MODEL	INSTALLATION WIDTH W	INSTALLATION HEIGHT H	SHOWER DOOR WALK-IN I	GLASS DOOR D	STATIONARY PANEL P	HARDWARE FINISH
LBSDD4879-C	44-48"	79"	16-20"	25 5/8"	23 5/8"	CHROME
LBSDD4879-B	44-48"	79"	16-20"	25 5/8"	23 5/8"	BRUSHED NICKEL
LBSDD6079-C	56-60"	79"	21 5/8-25 5/8"	31 5/8"	29 5/8"	CHROME
LBSDD6079-B	56-60"	79"	21 5/8-25 5/8"	31 5/8"	29 5/8"	BRUSHED NICKEL

REVERSIBLE INSTALLATION
(for left or right door opening)

INSTALLATION EXAMPLES:




Disclaimer: shower pan and shower panel system are not included

SHOWER DOORS

ULTRA D

SHOWER DOORS

- Sliding glass door with 2 stationary panels
- Glass thickness: 1/2" (12 mm)
- Glass type: clear tempered
- Construction: fully frameless
- Mounting type: guide rail roller
- Stainless steel guide rail
- Ultra quiet sliding operation
- No out-of-plumb (vertical) adjustment
- Reversible installation
- Hardware material: stainless steel
- Threshold size requirement: min 3 1/4"
- Intended use: residential, indoor



MODEL

MODEL	INSTALLATION WIDTH W	INSTALLATION HEIGHT H	SHOWER DOOR WALK-IN I	GLASS DOOR D	HARDWARE FINISH
LBSDD7279-C	68-72"	79"	20-24"	32 5/8"	CHROME
LBSDD7279-B	68-72"	79"	20-24"	32 5/8"	BRUSHED NICKEL

REVERSIBLE INSTALLATION (for left or right door opening)




INSTALLATION EXAMPLES:

Disclaimer: shower pan and shower panel system are not included

ULTRA E

SHOWER DOORS

- Swing-out glass door
- Glass thickness: 3/8" in (10 mm)
- Glass type: clear tempered
- Frameless glass door design
- Construction: fully frameless
- Mounting type: hinges self-closing
- No out-of-plumb (vertical) adjustment
- Reversible installation
- Hardware material: stainless steel
- Threshold size requirement: 3/8"
- Intended use: residential, indoor



MODEL

MODEL	INSTALLATION WIDTH W	INSTALLATION HEIGHT H	HARDWARE FINISH
LBSD4876-C	24"	72"	CHROME
LBSD4876-B	24"	72"	BRUSHED NICKEL
LBSD6076-C	30"	72"	CHROME
LBSD6076-B	30"	72"	BRUSHED NICKEL
LBSD6076-C	36"	72"	CHROME
LBSD6076-B	36"	72"	BRUSHED NICKEL

REVERSIBLE INSTALLATION (for left or right door opening)




INSTALLATION EXAMPLES:

Disclaimer: shower pan and shower panel system are not included

ULTRA E

SHOWER DOORS

- Swing-out glass door
- Glass thickness: 3/8" in (10 mm)
- Glass type: clear tempered
- Frameless glass door design
- Construction: fully frameless
- Mounting type: hinges self-closing
- No out-of-plumb (vertical) adjustment
- Reversible installation
- Hardware material: stainless steel
- Threshold size requirement: 3/8"
- Intended use: residential, indoor



REVERSIBLE INSTALLATION (for left or right door opening)



INSTALLATION EXAMPLES:

MODEL

MODEL	INSTALLATION WIDTH W	INSTALLATION HEIGHT H	GLASS DOOR D	GLASS PANEL P	HARDWARE FINISH
LBSD2472-C+LBSDPE672-CB	30-31"	72"	24"	6"	CHROME
LBSD2472-B+LBSDPE672-CB	30-31"	72"	24"	6"	BRUSHED NICKEL
LBSD2472-C+LBSDPE872-CB	32-33"	72"	24"	8"	CHROME
LBSD2472-B+LBSDPE872-CB	32-33"	72"	24"	8"	BRUSHED NICKEL
LBSD2472-C+LBSDPE1072-CB	34-35"	72"	24"	10"	CHROME
LBSD2472-B+LBSDPE1072-CB	34-35"	72"	24"	10"	BRUSHED NICKEL
LBSD2472-C+LBSDPE1272-CB	36-37"	72"	24"	12"	CHROME
LBSD2472-B+LBSDPE1272-CB	36-37"	72"	24"	12"	BRUSHED NICKEL
LBSD3072-C+LBSDPE672-CB	36-37"	72"	30"	6"	CHROME
LBSD3072-B+LBSDPE672-CB	36-37"	72"	30"	6"	BRUSHED NICKEL
LBSD3072-C+LBSDPE872-CB	38-39"	72"	30"	8"	CHROME
LBSD3072-B+LBSDPE872-CB	38-39"	72"	30"	8"	BRUSHED NICKEL
LBSD3072-C+LBSDPE1072-CB	40-41"	72"	30"	10"	CHROME
LBSD3072-B+LBSDPE1072-CB	40-41"	72"	30"	10"	BRUSHED NICKEL
LBSD2472-C+LBSDPE1872-CB	42-43"	72"	24"	18"	CHROME
LBSD2472-B+LBSDPE1872-CB	42-43"	72"	24"	18"	BRUSHED NICKEL
LBSD3072-C+LBSDPE1272-CB	42-43"	72"	30"	12"	CHROME
LBSD3072-B+LBSDPE1272-CB	42-43"	72"	30"	12"	BRUSHED NICKEL
LBSD3672-C+LBSDPE672-CB	42-43"	72"	36"	6"	CHROME
LBSD3672-B+LBSDPE672-CB	42-43"	72"	36"	6"	BRUSHED NICKEL
LBSD3672-C+LBSDPE872-CB	44-45"	72"	36"	8"	CHROME
LBSD3672-B+LBSDPE872-CB	44-45"	72"	36"	8"	BRUSHED NICKEL
LBSD3672-C+LBSDPE1072-CB	46-47"	72"	36"	10"	CHROME
LBSD3672-B+LBSDPE1072-CB	46-47"	72"	36"	10"	BRUSHED NICKEL
LBSD2472-C+LBSDPE2472-CB	48-49"	72"	24"	24"	CHROME
LBSD2472-B+LBSDPE2472-CB	48-49"	72"	24"	24"	BRUSHED NICKEL
LBSD3072-C+LBSDPE1872-CB	48-49"	72"	30"	18"	CHROME
LBSD3072-B+LBSDPE1872-CB	48-49"	72"	30"	18"	BRUSHED NICKEL
LBSD3672-C+LBSDPE1272-CB	48-49"	72"	36"	12"	CHROME
LBSD3672-B+LBSDPE1272-CB	48-49"	72"	36"	12"	BRUSHED NICKEL
LBSD3072-C+LBSDPE2472-CB	54-55"	72"	30"	24"	CHROME
LBSD3072-B+LBSDPE2472-CB	54-55"	72"	30"	24"	BRUSHED NICKEL
LBSD3672-C+LBSDPE1872-CB	54-55"	72"	36"	18"	CHROME
LBSD3672-B+LBSDPE1872-CB	54-55"	72"	36"	18"	BRUSHED NICKEL
LBSD3672-C+LBSDPE2472-CB	60-61"	72"	36"	24"	CHROME
LBSD3672-B+LBSDPE2472-CB	60-61"	72"	36"	24"	BRUSHED NICKEL

Disclaimer: shower pan and shower panel system are not included

SHOWER DOORS

NEW!

ULTRAG

SHOWER DOORS

- Swing-out glass doors
- Glass thickness: 3/8" in (10 mm)
- Glass type: clear tempered
- Frameless glass door design
- Mounting type: solid brass pivot hinges
- Out-of-plumb adjustability: yes 1"
- Reversible installation
- Hardware: solid brass/stainless steel/aluminum
- Threshold requirement: 7/8"
- Intended use: residential, indoor



MODEL

	INSTALLATION WIDTH W	INSTALLATION HEIGHT H	SHOWER DOOR WALK-IN I	HARDWARE FINISH
LBSDG3072-C	29-30"	72"	23-24"	CHROME
LBSDG3072-B	29-30"	72"	23-24"	BRUSHED NICKEL
LBSDG3472-C	34-35"	72"	28-29"	CHROME
LBSDG3472-B	34-35"	72"	28-29"	BRUSHED NICKEL

REVERSIBLE INSTALLATION
(for left or right door opening)



INSTALLATION EXAMPLES:


Disclaimer: shower pan and shower panel system are not included

NEW!

ULTRAG

SHOWER DOORS


- Swing-out glass doors
- Glass thickness: 3/8" in (10 mm)
- Glass type: clear tempered
- Frameless glass door design
- Mounting type: solid brass pivot hinges
- Out-of-plumb adjustability: yes 1"
- Reversible installation
- Hardware: solid brass/stainless steel/aluminum
- Threshold requirement: 7/8"
- Intended use: residential, indoor



MODEL

	INSTALLATION WIDTH W	INSTALLATION HEIGHT H	SHOWER DOOR WALK-IN I	GLASS DOOR D	STATIONARY PANEL P	HARDWARE FINISH
LBSDG3072-C+LBSEG3072-C	58-60"	72"	23-24"	29-30"	29-30"	CHROME
LBSDG3072-B+LBSEG3072-B	58-60"	72"	23-24"	29-30"	29-30"	BRUSHED NICKEL
LBSDG3072-C+LBSEG3472-C	63-65"	72"	23-24"	34-35"	34-35"	CHROME
LBSDG3072-B+LBSEG3472-B	63-65"	72"	23-24"	34-35"	34-35"	BRUSHED NICKEL
LBSDG3472-C+LBSEG3072-C	63-65"	72"	28-29"	29-30"	29-30"	CHROME
LBSDG3472-B+LBSEG3072-B	63-65"	72"	28-29"	29-30"	29-30"	BRUSHED NICKEL
LBSDG3472-C+LBSEG3472-C	68-70"	72"	28-29"	34-35"	34-35"	CHROME
LBSDG3472-B+LBSEG3472-B	68-70"	72"	28-29"	34-35"	34-35"	BRUSHED NICKEL

REVERSIBLE INSTALLATION
(for left or right door opening)



INSTALLATION EXAMPLES:


Disclaimer: shower pan and shower panel system are not included

SHOWER ENCLOSURES

ULTRAC

SHOWER ENCLOSURES


- Shower enclosure with sliding glass door and stationary panel
- Glass thickness: 3/8" in (10 mm)
- Glass type: clear tempered
- Construction: fully frameless
- Mounting type: guide rail roller
- Stainless steel guide rail
- Ultra quiet sliding operation
- No out of plumb (vertical) adjustment
- Reversible installation
- Hardware: stainless steel / aluminum
- Threshold requirement: min 2 3/4"
- Intended use: residential, indoor



MODEL

	INSTALLATION WIDTH W	DEPTH OF ENCLOSURE E	GLASS DOOR H	SHOWER DOOR WALK-IN I	INSTALLATION HEIGHT H	STATIONARY PANEL P	HARDWARE FINISH
LBSDC4876-C+LBSEC34576-CB	44-48"	34 1/2"	25 5/8"	16-20"	76"	23 5/8"	CHROME
LBSDC4876-B+LBSEC34576-CB	44-48"	34 1/2"	25 5/8"	16-20"	76"	23 5/8"	BRUSHED NICKEL
LBSDC4876-C+LBSEC3676-CB	44-48"	36"	25 5/8"	16-20"	76"	23 5/8"	CHROME
LBSDC4876-B+LBSEC3676-CB	44-48"	36"	25 5/8"	16-20"	76"	23 5/8"	BRUSHED NICKEL
LBSDC6076-C+LBSEC34576-CB	56-60"	34 1/2"	31 5/8"	21 5/8-25 5/8"	76"	29 5/8"	CHROME
LBSDC6076-B+LBSEC34576-CB	56-60"	34 1/2"	31 5/8"	21 5/8-25 5/8"	76"	29 5/8"	BRUSHED NICKEL
LBSDC6076-C+LBSEC3676-CB	56-60"	36"	31 5/8"	21 5/8-25 5/8"	76"	29 5/8"	CHROME
LBSDC6076-B+LBSEC3676-CB	56-60"	36"	31 5/8"	21 5/8-25 5/8"	76"	29 5/8"	BRUSHED NICKEL

REVERSIBLE INSTALLATION
(for left or right door opening)

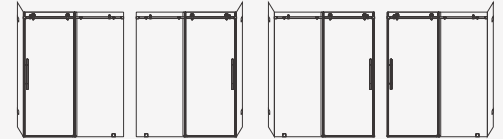


INSTALLATION EXAMPLES:

Disclaimer: shower pan and shower panel system are not included

ULTRAC

SHOWER ENCLOSURES


- Shower enclosure with sliding glass door and 2 stationary panels
- Glass thickness: 3/8" in (10 mm)
- Glass type: clear tempered
- Construction: fully frameless
- Mounting type: guide rail roller
- Stainless steel guide rail
- Ultra quiet sliding operation
- No out of plumb (vertical) adjustment
- Reversible installation
- Hardware: stainless steel / aluminum
- Threshold requirement: min 2 3/4"
- Intended use: residential, indoor



MODEL

	INSTALLATION WIDTH W	DEPTH OF ENCLOSURE E	GLASS DOOR H	SHOWER DOOR WALK-IN I	INSTALLATION HEIGHT H	HARDWARE FINISH
LBSDC7276-C+LBSEC34576-CB	68-72"	34 1/2"	32 5/8"	20-24"	76"	CHROME
LBSDC7276-B+LBSEC34576-CB	68-72"	34 1/2"	32 5/8"	20-24"	76"	BRUSHED NICKEL
LBSDC7276-C+LBSEC3676-CB	68-72"	34 1/2"	32 5/8"	20-24"	76"	CHROME
LBSDC7276-B+LBSEC3676-CB	68-72"	34 1/2"	32 5/8"	20-24"	76"	BRUSHED NICKEL

REVERSIBLE INSTALLATION
(for left or right door opening)

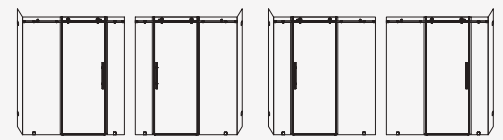


INSTALLATION EXAMPLES:

Disclaimer: shower pan and shower panel system are not included

SHOWER ENCLOSURES

ULTRAD SHOWER ENCLOSURES

- Shower enclosure with sliding glass door and stationary panel
- Glass thickness: 1/2 in (12 mm)
- Glass type: clear tempered
- Construction: fully frameless
- Mounting type: guide rail roller
- Stainless steel guide rail
- Ultra quiet sliding operation
- No out-of-plumb (vertical) adjustment
- Reversible installation
- Hardware: stainless steel
- Threshold requirement: min 3 1/4"
- Intended use: residential, indoor



MODEL

MODEL	INSTALLATION WIDTH W	DEPTH OF ENCLOSURE E	GLASS DOOR H	SHOWER DOOR WALK-IN I	INSTALLATION HEIGHT H	STATIONARY PANEL P	HARDWARE FINISH
LBSD4879-C+LBSEC34579-CB	44-48"	34 1/2"	26 5/8"	16-20"	79"	23 3/8"	CHROME
LBSD4879-B+LBSEC34579-CB	44-48"	34 1/2"	26 5/8"	16-20"	79"	23 3/8"	BRUSHED NICKEL
LBSD4879-C+LBSEC3679-CB	44-48"	36"	26 5/8"	16-20"	79"	23 3/8"	CHROME
LBSD4879-B+LBSEC3679-CB	44-48"	36"	26 5/8"	16-20"	79"	23 3/8"	BRUSHED NICKEL
LBSD6079-C+LBSEC34579-CB	56-60"	34 1/2"	29 3/8"	22-26"	79"	29 3/8"	CHROME
LBSD6079-B+LBSEC34579-CB	56-60"	34 1/2"	29 3/8"	22-26"	79"	29 3/8"	BRUSHED NICKEL
LBSD6079-C+LBSEC3679-CB	56-60"	36"	29 3/8"	22-26"	79"	29 3/8"	CHROME
LBSD6079-B+LBSEC3679-CB	56-60"	36"	29 3/8"	22-26"	79"	29 3/8"	BRUSHED NICKEL


REVERSIBLE INSTALLATION
(for left or right door opening)



INSTALLATION EXAMPLES:

ULTRAD SHOWER ENCLOSURES


- Shower enclosure with sliding glass door and 2 stationary panels
- Glass thickness: 1/2 in (12 mm)
- Glass type: clear tempered
- Construction: fully frameless
- Mounting type: guide rail roller
- Stainless steel guide rail
- Ultra quiet sliding operation
- No out-of-plumb (vertical) adjustment
- Reversible installation
- Hardware: stainless steel
- Threshold requirement: min 3 1/4"
- Intended use: residential, indoor



MODEL

MODEL	INSTALLATION WIDTH W	DEPTH OF ENCLOSURE E	GLASS DOOR H	SHOWER DOOR WALK-IN I	INSTALLATION HEIGHT H	HARDWARE FINISH
LBSD7279-C+LBSEC34579-CB	68-72"	34 1/2"	32 5/8"	20-24"	76"	CHROME
LBSD7279-B+LBSEC34579-CB	68-72"	34 1/2"	32 5/8"	20-24"	76"	BRUSHED NICKEL
LBSD7279-C+LBSEC3679-CB	68-72"	34 1/2"	32 5/8"	20-24"	76"	CHROME
LBSD7279-B+LBSEC3679-CB	68-72"	34 1/2"	32 5/8"	20-24"	76"	BRUSHED NICKEL

REVERSIBLE INSTALLATION
(for left or right door opening)

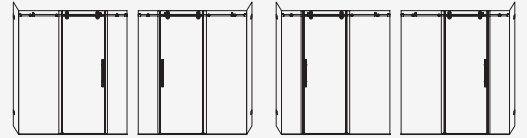

INSTALLATION EXAMPLES:

Disclaimer: shower pan and shower panel system are not included

SHOWER PANEL SYSTEM:
LSP2-B

SHOWER ENCLOSURE:
LBSDG3472-B+LBSEG3072-B

UPPER PIVOT HINGE

CORNER GLASS SHELVES


LOWER PIVOT HINGES

MODERN DOOR HANDLE

NEW!

ULTRAG SHOWER ENCLOSURES


- Shower enclosure with swing-out glass door
- Glass thickness: 3/8" in (10 mm)
- Glass type: clear tempered
- Construction: frameless glass door design
- Mounting type: solid brass pivot hinges
- 2 glass shelves on panel for support
- Out-of-plumb adjustability: yes 1" panel / 1" door
- Reversible installation
- Hardware: solid brass/stainless steel/aluminum
- Threshold requirement: min 1"
- Intended use: residential, indoor



MODEL

MODEL	INSTALLATION WIDTH W	DEPTH OF ENCLOSURE E	SHOWER DOOR WALK-IN I	INSTALLATION HEIGHT H	HARDWARE FINISH
LBSDG3072-C+LBSEG3072-C	29 3/8-30"	29-30"	24"	72"	CHROME
LBSDG3072-B+LBSEG3072-B	29 3/8-30"	29-30"	24"	72"	BRUSHED NICKEL
LBSDG3072-C+LBSEG3472-C	29 3/8-30"	34-35"	24"	72"	CHROME
LBSDG3072-B+LBSEG3472-B	29 3/8-30"	34-35"	24"	72"	BRUSHED NICKEL
LBSDG3472-C+LBSEG3072-C	34 3/8-35"	29-30"	30"	72"	CHROME
LBSDG3472-B+LBSEG3072-B	34 3/8-35"	29-30"	30"	72"	BRUSHED NICKEL
LBSDG3472-C+LBSEG3472-C	34 3/8-35"	34-35"	30"	72"	CHROME
LBSDG3472-B+LBSEG3472-B	34 3/8-35"	34-35"	30"	72"	BRUSHED NICKEL

REVERSIBLE INSTALLATION
(for left or right door opening)



INSTALLATION EXAMPLES:

Disclaimer: shower pan and shower panel system are not included