

Features

- Includes face plate with handle, shower arm with flange and showerhead.
- Single lever handle controls both on/off activation and temperature setting.
- Coordinates with Coralais faucets and accessories to complete your bathroom.
- Includes single function 1.5 gpm (5.7 l/min) showerhead.
- Showerhead features MasterClean[™] sprayface for easy cleaning.
- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3 degrees Fahrenheit during water pressure fluctuations.

Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing.

Installation

• Trim set requires valve to complete installation.

Required Products/Accessories

K-304/K-P304 Series Rite-Temp® Valves or

- K-304/K-P304 Series Rite-Temp ${\ensuremath{\mathbb R}}$ Valves or
- K-304/K-P304 Series Rite-Temp $\ensuremath{\mathbb{R}}$ Valves or

K-304/K-P304 Series Rite-Temp® Valves or

K-304/K-P304 Series Rite-Temp $\ensuremath{\mathbb{B}}$ Valves or

K-304/K-P304 Series Rite-Temp® Valves or

K-304/K-P304 Series Rite-Temp® Valves or

K-304/K-P304 Series Rite-Temp® Valves or

K-304/K-P304 Series Rite-Temp $\ensuremath{\mathbb{R}}$ Valves or

K-304/K-P304 Series Rite-Temp® Valves or

K-304/K-P304 Series Rite-Temp $\ensuremath{\mathbb{B}}$ Valves or

K-304/K-P304 Series Rite-Temp® Valves or

K-304/K-P304 Series Rite-Temp® Valves or

K-304/K-P304 Series Rite-Temp® Valves



Rite-Temp® Shower Valve Trim

Coralais[®]

K-TS15611-4H





Codes/Standards ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense®

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description


CP Polished Chrome

G Brushed Chrome



KOHLER. Faucets

Coralais® Rite-Temp® Shower Valve Trim K-TS15611-4H

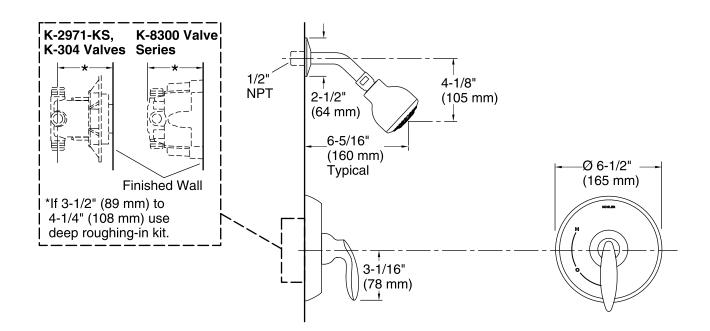

Technical Information

All product dimensions are nominal.

Showerhead/Body Spray:

Rated maximum flow:1.5 gal/min (5.7 l/min)Pressure:80 psi (5.5 bar)

Notes

Install the product according to the installation guide.

NOTICE: Risk of product damage. Long screws for installing trim can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

