

FLOS

Ray S, White - Specification Sheet by Rodolfo Dordoni, 2007


| | |
|-----------------------------------|--|
| Mounting | Ceiling Pendant |
| Lamp (Bulb) Description | 1 x 250W T-10 Medium Frosted Halogen (Included) |
| Canopy Dimension | Diameter 4.92" |
| Environment | Indoor - Dry Location |
| Dimming | Phase-cut Dimming / Triac Type |
| Finish | Glossy White |
| Technical and Product Description | RAY S pendant lamp providing direct or diffused lighting. Chrome-plated metal structure and lathe-shaped aluminum diffusers, painted white on the inside, and shiny white or black on the outside or gray-colored, blown and overlaid glass with glossy external finish. Liquid paint protection. Opal blown glass inner diffuser. White painted steel ceiling attachment protected with transparent paint, and polished aluminum cover. |

Electrical

| | |
|-----------|------|
| Voltage | 120 |
| Switching | NA |
| IP Rating | IP20 |


Physical

| | |
|-----------------------|---------------------------------------|
| Cord Length (inches) | 106" - Clear |
| Construction Material | Aluminum, Glass, Polycarbonate, Steel |
| Weight | 8.3 lbs |

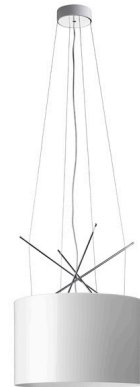

FU593509 Glossy White

Dimensional Image



Certifications



Lamping (Bulb)



250W T-10 Medium Frosted Halogen

Lamping (Bulb)



LED018 PRO-T38LED 14W 120V E26 2700K
DIMM - 1800lm - CRI80 Additional

Lamping (Bulb)



LED031 PRO-T38LED 14W 120V E26 3000K
Dimmable - 1800lm - CRI80- Additional