

#### Features


- Acrylic
- Left or right outlet
- Integral apron
- Integral tile flange
- 60" (1524 mm) x 36" (914 mm) x 20" (508 mm)

# **Codes/Standards Applicable**

Specified model meets or exceeds the following:

• CSA B45.5/IAPMO Z124





# **Colors/Finishes**

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### Accessories

- CP: Polished Chrome
- PB: Vibrant<sub>®</sub> Polished Brass
- Other: Refer to Price Book for additional colors/finishes

#### **Specified Model**

Model	Description	Colors/Finishes				
K-1242-LA	Bath with integral apron – left-hand drain		0	Other		
K-1242-RA	Bath with integral apron – right-hand drain		0 🗆	Other		
Recommended Accessories						
K-7161-AF	Drain	CP	🗆 PB	□ Other		

#### **Product Specification:**

The bath shall be 60" (1524 mm) in length, 36" (914 mm) in width, and 20" (508 mm) in height. Bath shall be made of acrylic. Bath shall have left or right outlet. Bath shall have integral apron and integral tile flange. Bath shall be Kohler Model K-1242-\_\_\_\_\_-.

# MARIPOSATM


#### **Technical Information**

<b>F</b> ., +				
Fixture:*				
Bathing well				
Basin area, bottom	46" (1168 mm) x 24" (610 mm)			
Basin area, top	54" (1372 mm) x 27" (686 mm)			
Weight	62 lbs (28.1 kg)			
To overflow				
Water depth	14″ (356 mm)			
Capacity	63 gal (238.5 L)			
* Approximate measurements for comparison only.				

### **Installation Notes**

Install this product according to the installation guide. **NOTE:** Unless otherwise specified, floor support under bath must provide for a minimum of 41 lbs./square foot (200 kg./square meter) loading.

If installing a rim-mount faucet, make sure any plumbing does not interfere with the drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

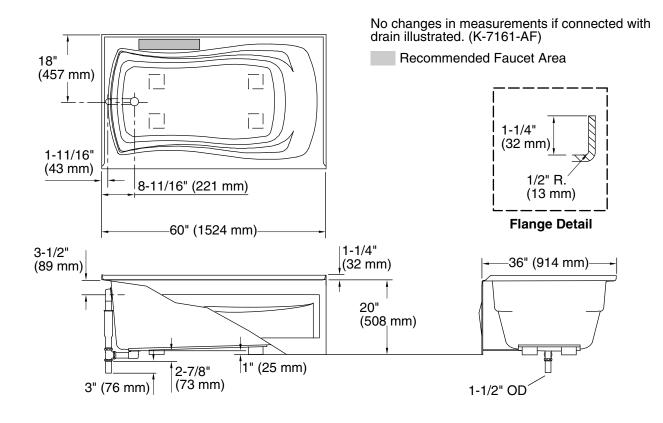

**Product Diagram** 

