

ASSEMBLY INSTRUCTIONS

WARNING!

- ☐ Chair have a 250 lbs weight capacity.
- ☐ Hang cushion over chair frame to dry if it gets wet to prevent mold/mildew.


ATTENTION:

1. Please read these instructions carefully before assembly.
2. Aluminum is soft metal over tighten may strip threads or break the part.
3. DO NOT use power tools.
4. Check parts against the parts list to make sure you have all parts needed for proper assembly.
5. Familiarize yourself with the inventory of parts and the accompanying illustrations to ensure safe and proper assembly.

Assembly steps:

1. Loosely attached the clean back(C) to the left arm and right arm with bolt(E), flat washers(F), lock washers(G), nuts(H). DO NOT tighten the nuts.
2. Leave enough play for assembly the seats, push the seat to the seat to the gap between the arms and seat, tighten the bolt(E), flat washer(F), lock washer(G) and nut(H).
3. Finally attach the nut cap(I) to the back nuts. Tighten all the screw.
4. Turn the chair onto its legs and use the adjuster feet to level the legs.

Warning : please do not use acid or alkaline washing liquid to clean the product.

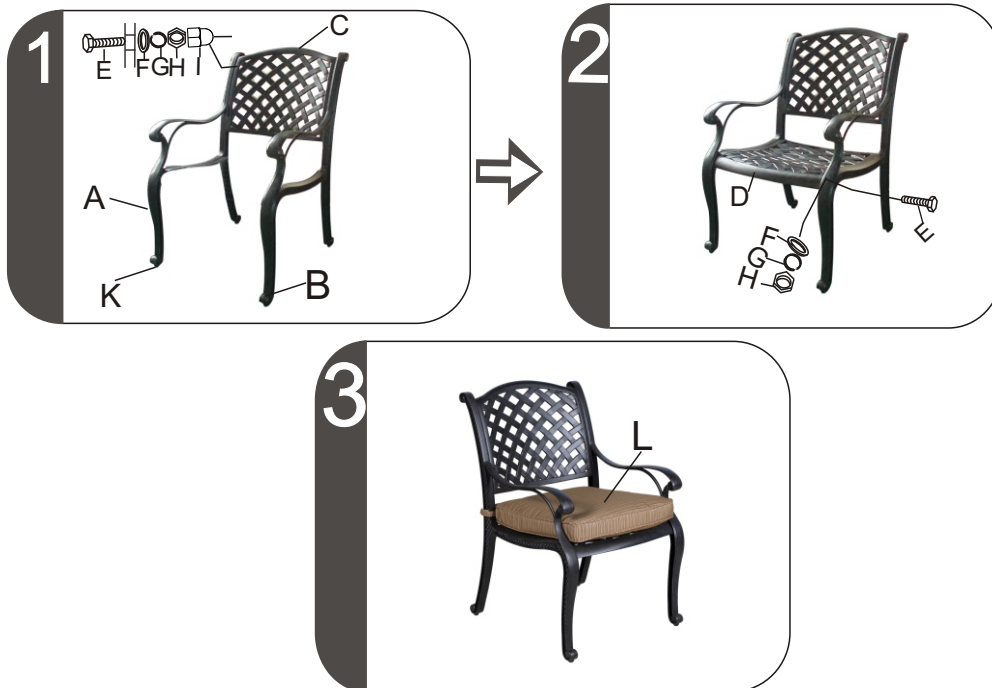

Parts list	Parts picture	Description	Qty	Parts list	Parts picture	Description	Qty
A		Left arm	1	E	(M8*35)	Bolt	8
B		Right arm	1	F	(M8)	Flat washer	8
C		Back	1	G	(M8)	Lock washer	8
D		Seat	1	H	(M8)	Nut	8
K		Foot leveler	Factory already assembled	I	(M8)	Nut cap	4
L		Cushion	1	J		Wrench	1

Made in China

*** DO NOT OVER TIGHTEN**

*** NO POWER TOOLS**

*** NO SOCKET DRIVERS**

