

# KUZCO LIGHTING

## LUMINAIRE PHOTOMETRIC REPORT

**Filename:** AT6606-BN-UNV - Mica

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** WALL SCONCE/ WALL MOUNT

**Luminaire Cat:** AT6606-BN-UNV

**Lamp:** DC LED

**Lamp Cat:** N/A

**Lamp Output:** Total luminaire Lumens: 988

**Max Candela:** 195.2 at Horizontal: 180°, Vertical: 2.5°

**Input Wattage:** 15.2

**Luminous Opening:** Rectangle w/Luminous Sides (L: 1.61", W: 6.26", H: 5.47")

**Test:** 1954-22

**Test Date:** 21 June 2022


**Test Lab:** KUZCO LIGHTING

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

**Nema Type:** 7 X 7

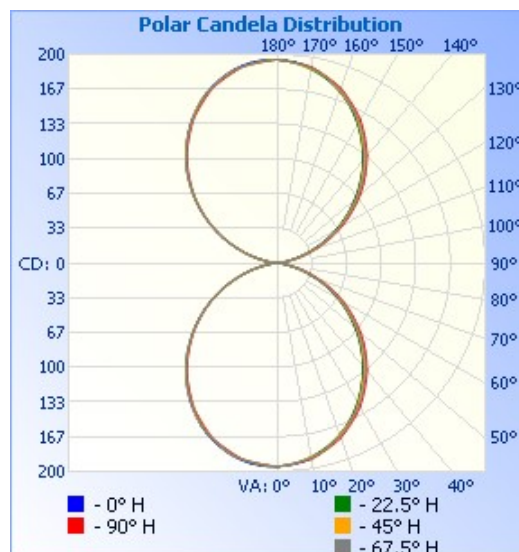


### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	148.4	15%
0-40	239.9	24.3%
0-60	410.0	41.5%
60-90	84.0	8.5%
70-100	35.1	3.6%
90-120	84.0	8.5%
0-90	494.1	50%
90-180	494.0	50%
0-180	988.0	100%

### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	18.4	1.9%	90-100	4.9	0.5%
10-20	52.2	5.3%	100-110	25.3	2.6%
20-30	77.8	7.9%	110-120	53.8	5.4%
30-40	91.5	9.3%	120-130	78.5	7.9%
40-50	91.6	9.3%	130-140	91.6	9.3%
50-60	78.5	7.9%	140-150	91.5	9.3%
60-70	53.8	5.4%	150-160	77.8	7.9%
70-80	25.3	2.6%	160-170	52.2	5.3%
80-90	4.9	0.5%	170-180	18.4	1.9%

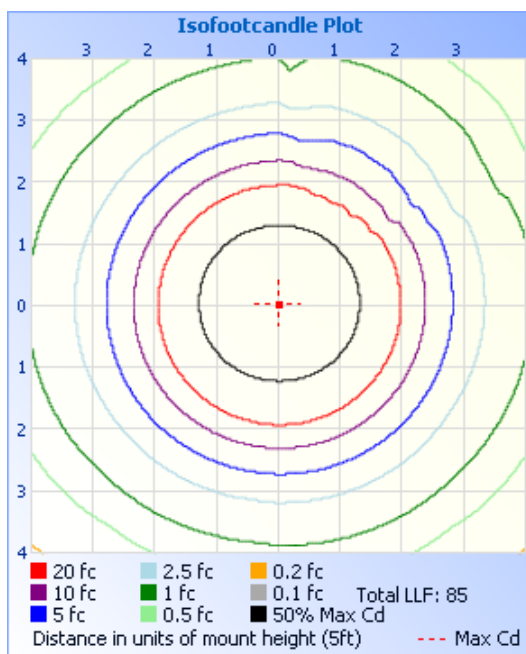

Photometrics Pro 1.3.29 copyright 2003-2023 by jSolutions, Inc.  
Reported data calculated from manufacturer's data file, based on IES recommended methods.