

LED Pendant



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Cleverly hidden LED modules and a circular frosted diffuser floating inside a halo of spun aluminum.

FEATURES

- Acrylic diffuser to provide even illumination with no LED hotspots
- Thin powered aircraft cables provide an ultra-clean look
- Can be mounted on a sloped ceiling
- Universal voltage driver (120V - 220V - 277V) concealed within canopy.
- Color Temperature: 3000K
- CRI: 90
- Rated Life: 75,000 hours

SPECIFICATIONS

Construction: Aluminum with acrylic diffuser.


Input: 120V - 277V

Dimming: 100% - 10% ELV
100% - 5% 0-10V

Light Source: High output LED

Finish: White (WT), Black (BK), Brushed Aluminum (AL)

Standards: ETL/cETL, Damp location listed, JA8 2016 Title 24 Compliant

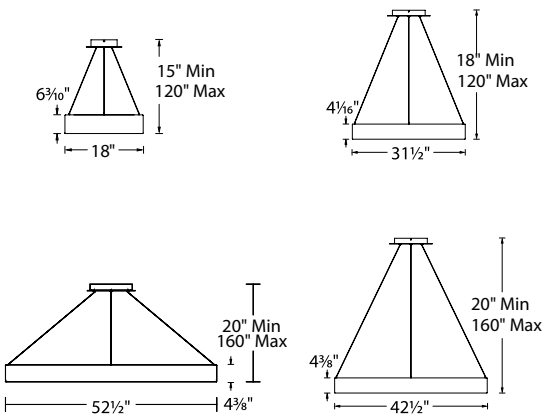

ORDER NUMBER

Size	Watt	LED Lumens	Delivered Lumens	Finish
18"	22W	1495	940	WT White BK Black AL Brush Aluminum
32"	88W	6340	4435	
43"	125W	11115	7300	
53"	169W	12028	8458	