



# Puretide

## Elongated Toilet Seat w/Manual Cleansing

### K-5724

#### Features

- Single wand provides ambient-water cleansing.
- Adjust water spray position and pressure using the convenient side handle.
- Self-cleaning wand automatically rinses after each use.
- Manually operated wand requires no batteries or electrical power.
- Quiet-Close™ lid closes slowly and quietly without slamming.
- Quick-Release™ hinges allow seat to be unlatched from toilet for easy removal and convenient cleaning; no tools required.
- Quick-Attach® hardware for fast and secure installation.
- Grip-Tight bumpers add stability and prevent shifting.
- Ergonomically designed for comfortable seating.

#### Material

- Plastic

#### Installation

- Fits most elongated toilets.
- Requires connection to toilet water supply line. All hoses and connections are included.
- Requires phillips screwdriver and adjustable wrench for installation.

#### Components

Additional included component/s: mounting hardware, two additional nozzles, T-valve, and bidet hose.



#### Codes/Standards

None Applicable

#### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

#### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------




0



96

Biscuit

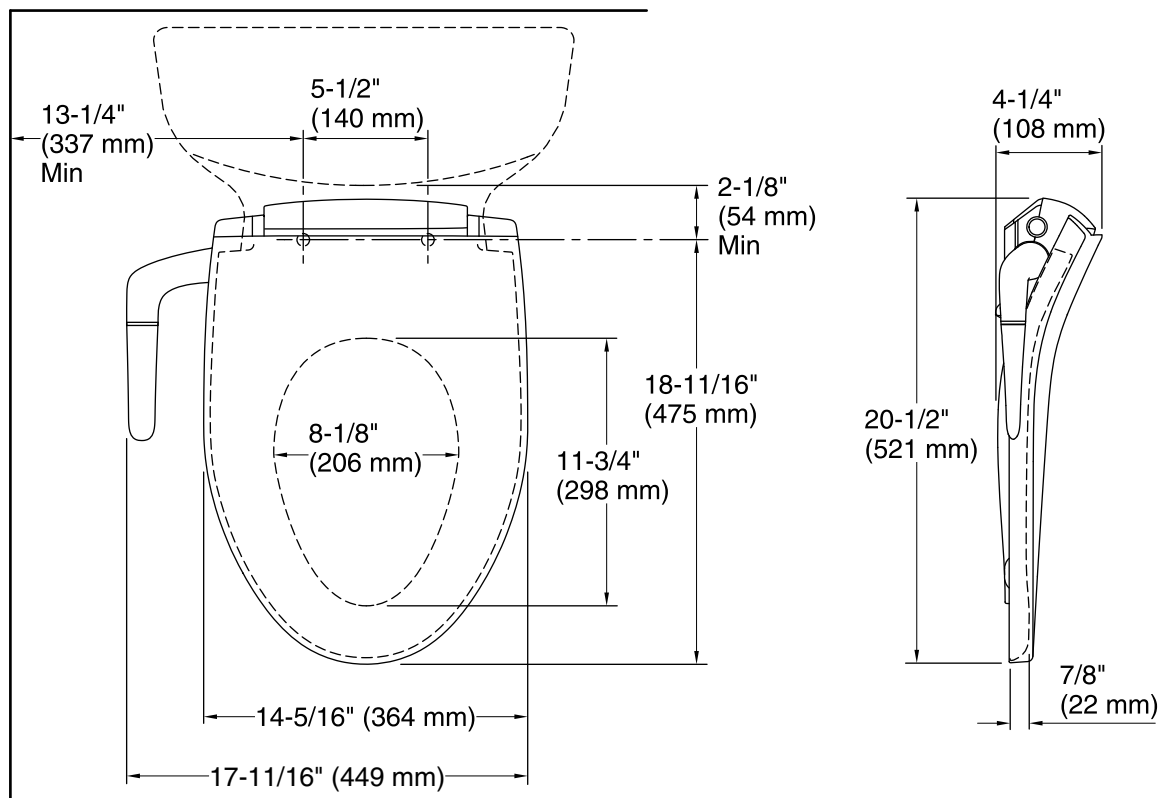

### Technical Information

All product dimensions are nominal.

Seat shape type: Elongated  
 Seat front type: Closed front  
 Seat hinge type: Quick-Attach®, Quiet-Close™, Quick-Release™  
 Seat-mounting holes: 5-1/2" (140 mm)

### Notes

Install this product according to the installation guide.

**WARNING:** Risk of scalding. High water temperature can cause severe burns. Do not connect this device to a water supply with a maximum temperature above 104°F (40°C).

Only connect the seat to a cold water supply of drinking quality water at a pressure of 20 (139 kPa) - 80 psi (551 kPa).

Locate the receptacle at least 6" (152 mm) above the floor, and within a 32" (813 mm) radius measured 2" (51 mm) from the bowl ledge.