American Standard

LEAD FREE

MODEL NUMBER:

❏ **1340.227** Cast centerset, 0.5 GPM pressure compensating, vandal-resistant non-aerated spray.
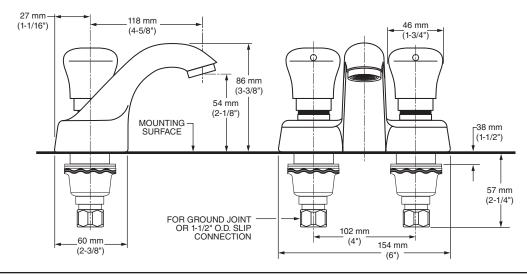
GENERAL DESCRIPTION:

Metering centerset conventional spout faucet. Vandal-resistant solid brass construction. Easy-push handles. Water conserving, pressure compensating 0.5 GPM vandal-resistant non-aerated spray. Factory set for a maximum of 0.083 gallon flow per activation. Replaceable valve cartridge. Adjustable flow cycle.

PRODUCT FEATURES:

• **Meets CALGreen:** Delivers 0.083 gallons per cycle which is a 59% water savings from CALGreen baseline.

• **Pressure Compensating Non-Aerated Spray:** Provides a constant water flow of 0.5 gpm throughout the pressure range.

• **Vandal-Resistant Brass Construction and Spray:** Durable - Excellent in high use applications.

• **Automatic Shut-off:** Stops water and energy waste. Ideal for public restrooms where uncontrolled water usage is costly.

• **Meets ADA Standard:** Requires less than 5 lbs. of operating force to initiate flow per ANSI A117.1.

• **Adjustable Flow Cycle**

• **Replaceable Valve Cartridge:** Facilitates simple replacement.

• **Hot/Cold Button Indicators**

• **Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average.

• **Minimum Operating Pressure:** 20 psi

27 mm (1-1/16")
118 mm (4-5/8")
46 mm (1-3/4")
86 mm (3-3/8")
54 mm (2-1/8")
MOUNTING SURFACE
38 mm (1-1/2")
FOR GROUND JOINT OR 1-1/2" O.D. SLIP CONNECTION
57 mm (2-1/4")
60 mm (2-3/8")
102 mm (4")
154 mm (6")

SUGGESTED SPECIFICATION

Metering faucet shall feature a vandal-resistant brass construction with a replaceable valve cartridge and an adjustable flow cycle. Shall also feature a water-conserving, pressure compensating 0.5 gpm/1.9 L/min vandal-resistant non-aerated spray. Factory set to deliver 0.083 gallons per cycle to meet CALGreen. Push button activator shall meet ANSI A117.1 Standard. Fitting shall be American Standard Model # 1340.227.002.

American Standard

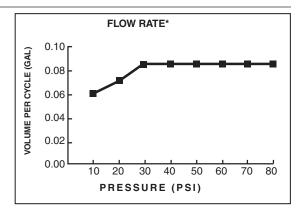## CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1
ASME A112.18.1
CSA B 125
NSF 61/Section 9 and Annex G
CALGreen

FLOW RATE*

Meets the American Disabilities Act Guidelines **ANSI A117.1** Requirements for the accessible and usable building facilities - check local codes.