

16 Gauge
1-1/4" Tubing.



16 Gauge
1-1/4" Tubing.



Support base
fully welded
(4 sides) to
legs. Full contact
(legs to plate).



Complete
welded
top & bottom
foot ring to legs.




Brazed joints
(maximum
strength &
visually
appealing.)



Powder coated
(weather
resistant)
52 stainless ball
bearings (encased)



1" solid
oak or maple
seats (dished)
for seating
comfort.

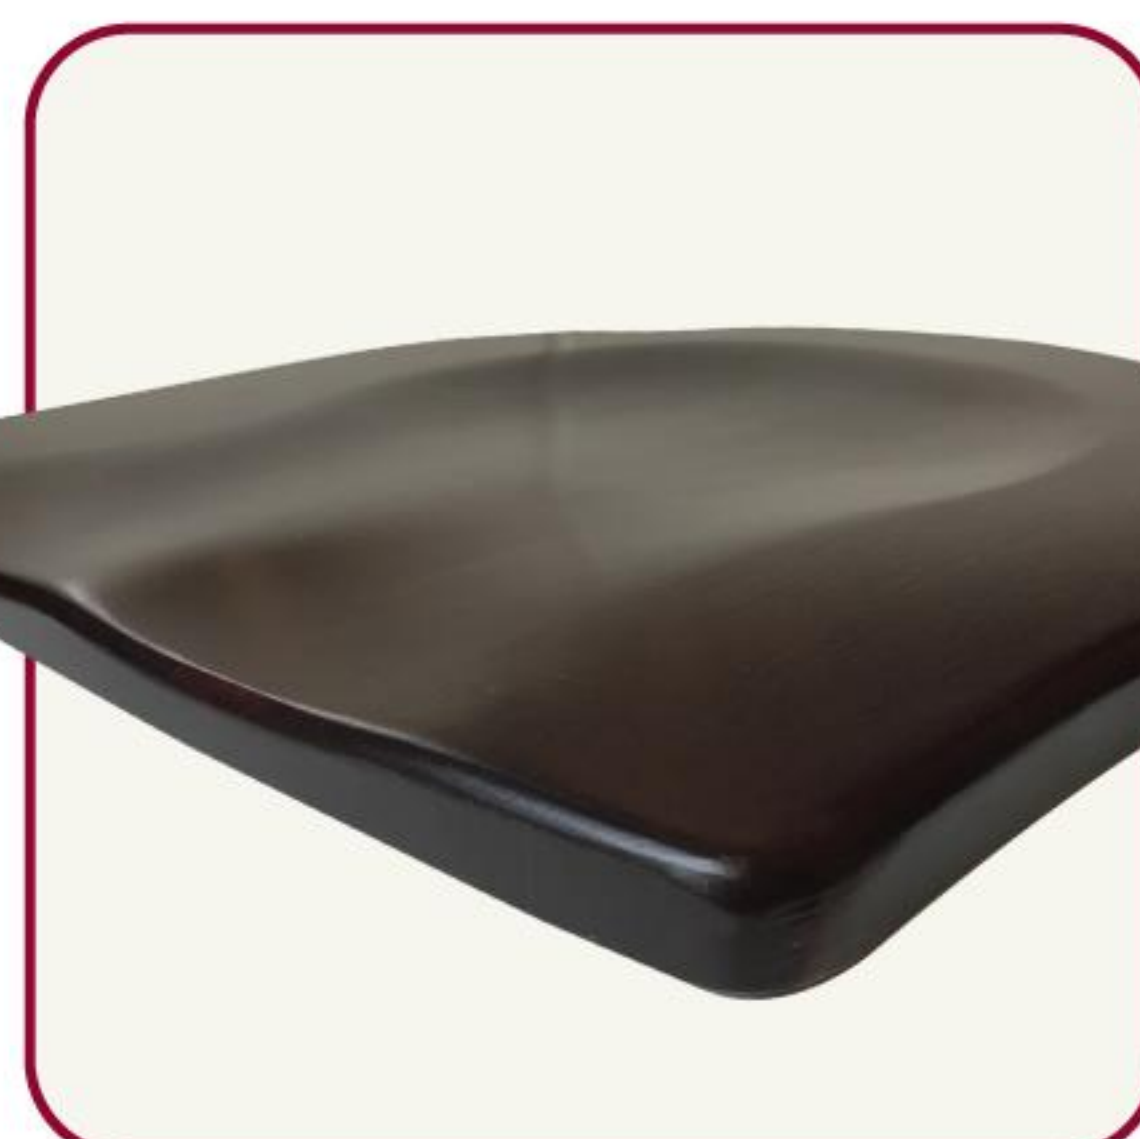

18 Gauge
1-1/8" Tubing.



18 Gauge
1-1/8" Tubing.



Support base spot
welded (1 side)
to legs. Partial contact
(legs to plate).



Only a
bottom weld
on foot ring
(to legs)



Sloppy
welded joints.



8 non-coated
ball bearings
placed in a chip
board gasket.



1/2"
porous plywood.
Minimal dishing
(lack of comfort).

