



products meet or exceed applicable ANSI/BIFMA standards



SPECS:

- Constructed with 3/4" solid plywood core
- Available with carpet in choice of 4 colors or 1/8" thick tempered hardboard
- 16-gauge, 1-13/16" high formed steel channel frame reinforced with 16-gauge steel angle welded to the inside of the channel
- 14-gauge steel tubing capped at the point of floor contact with high impact plastic glides
- Legs open and close using only one hand
- Stages and risers equipped with drop-in couplings that allow units of same or different heights to be joined together
- All ganging devices are permanently secured to each unit
- Exceeds 200 lbs. per square foot load bearing capacity
- Available in 36" and 48" widths and 96" length
- Comes in 4 heights; 8", 16", 24" and 32"
- Skirting available for all stages in 2 styles; shirred pleat and box pleat
- Optional Stage Pies for semi-circle arrangements
- 3 step heights available to connect to 16"H Stages and above
- Optional Guardrails recommended for safety. Guardrails are 14-gauge
- 10-year warranty

INCLUDES 36"W AND 48"W STAGES, STAGE PIES, & STAGE SETS




MODEL S4824C SHOWN


MODEL SPST48C SHOWN

SURFACE CAN BE HARDBOARD OR CARPETED


CARPET COLOR OPTIONS



Stages

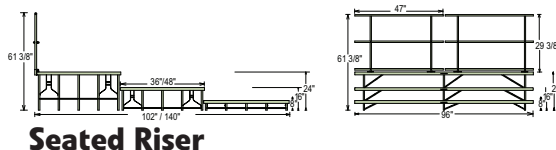


Seated Riser




Stage Pie

Box Pleat Skirting



Shirred Pleat Skirting



SKIRTING COLOR OPTIONS



USE WITH:

Model #GRS Stage Guard Rail



Model #SDL Stage Dolly

BUILT IN LATCH SECURES STAGES TO DOLLY

HOLDS 6 STAGES



Steps For Stages



National Public Seating

