

### Features

- 8 (203 mm) centers.
- 14-3/8" (365 mm) wall-to-spout outlet with wall brace, pail hook and pipe support.
- 1/4-turn full brass ceramic valve.
- 13.5 gal/min (51 l/min) flow rate at 60 psi (4.1 bar).
- 4-1/16" vandal-proof metal wristblade lever handles.
- Integral supply stops with lock key for easy and convenient access.
- Drain sold separately.

### Material

- Solid brass construction with thick chrome plating for rough commercial applications.

### Installation

- Eccentric inlet shanks for easy installation.

### Recommended Products/Accessories

K-23723 Faucet cleaner



ADA

CSA B651

OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1

ADA

ICC/ANSI A117.1

CSA B651

OBC

### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|



|    |                 |
|----|-----------------|
| CP | Polished Chrome |
|----|-----------------|

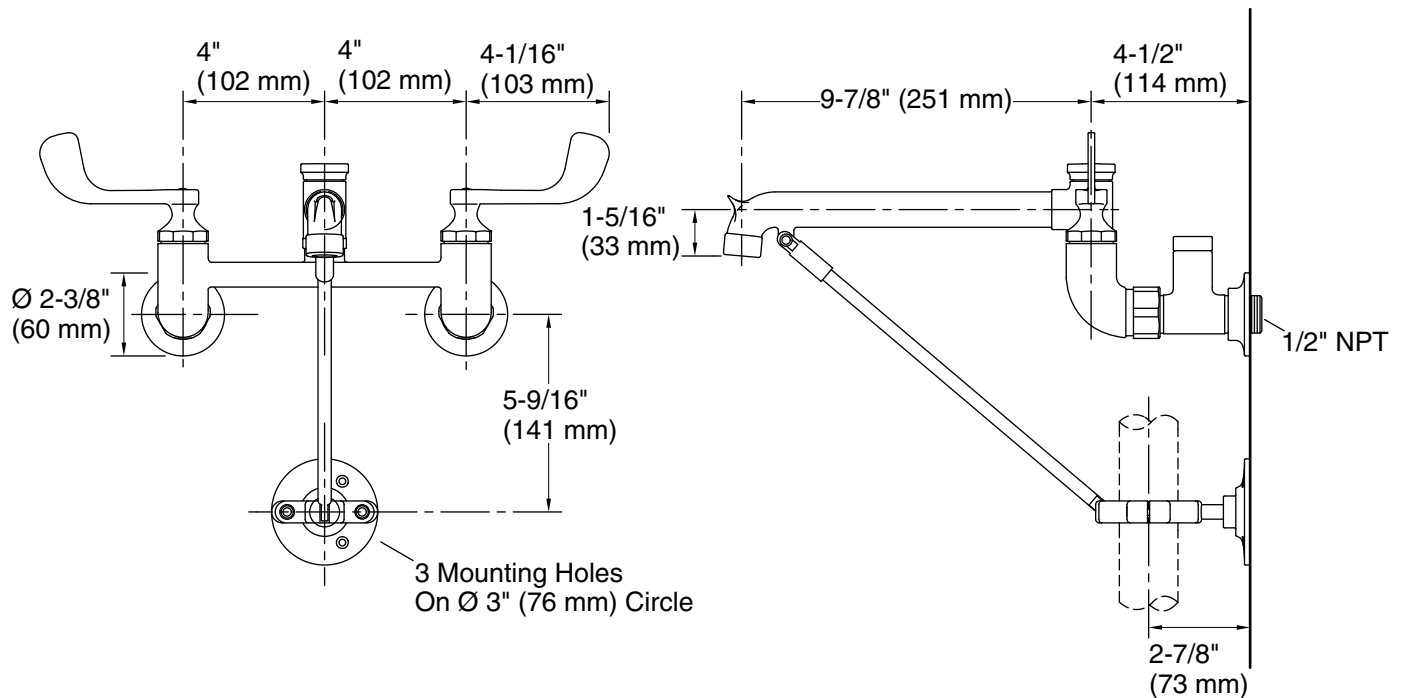

## Technical Information

All product dimensions are nominal.

### Faucet:

Flow rate: 13.5 gal/min (51.1 l/min)  
Pressure: 60 psi (4.1 bar)  
Valve body: Cast brass  
Drain included: No

### Spout:

Spout reach: 14-3/8" (365 mm)  
Handle clearance: 3" (76 mm)

## Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.