



















Installation manual for: D28" H24" L6

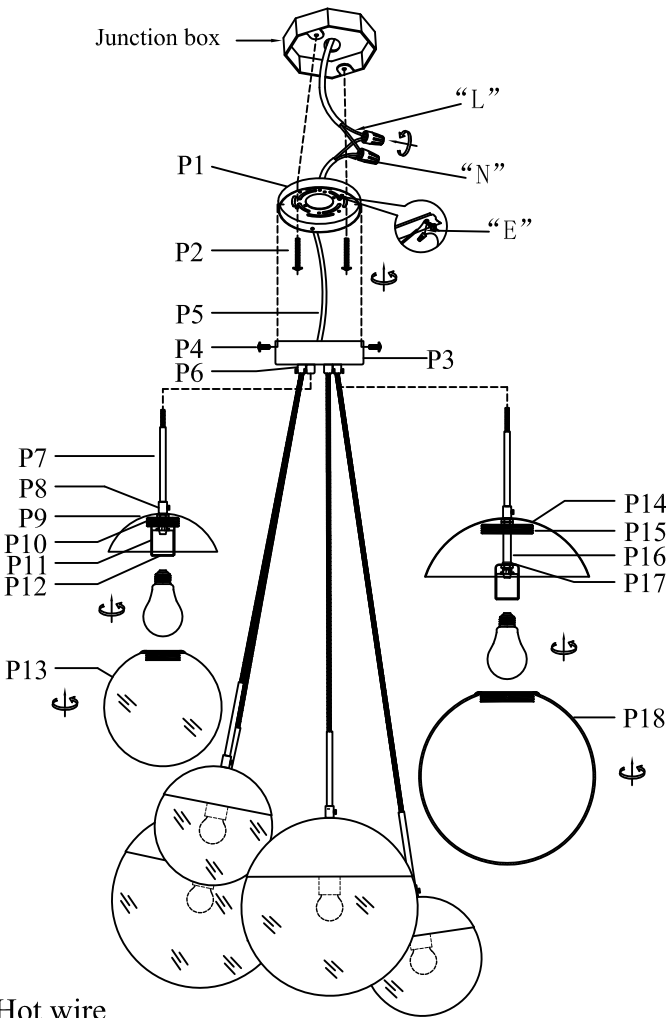
Installation instructions:

- 1. Black wire from ceiling(junction box) attaches to "L"wire from the fixture.
- 2.White wire from ceiling(junction box) attaches to "N"wire from the fixture.
- 3. "E" wire from the fixture is attaced to the mounting bracket and an additional "E" wire from the mounting bracket must be secured to the junction box.
- 4.Secure mounting bracket to the junction box.
- 5.Insert screws (P2) in side of top unit the mounting bracket.
- 6.Place the top suction plate(P3) on the hanging plate (P1) and screw(P4) tightly.
- 7.Install E26 light source,no include bulb.
- 8.Place the glass cover (P13),(P18) on the semicircular cover (P9),(P14).

The end!

PARTS LIST

part	picture	Description	Qty	Check list
P1		D5.5" Mounting bracket	1	
P2		5/32-32 Screw	2	
P3		D6" Canopy plat	1	
P4		5/32-32 Screw	2	
P5		Power Cord 1' Black	1	
P6		Car iron parts	6	
P7		L5.24"Tube	6	
P8		Coupling	6	
P9		D7.28" Semicircular cover	3	
P10		D2.16" Screw die	3	
P11		Socket cover	6	
P12		E26 Socket	6	
P13		D8" Milk Glass	3	
P14		D11" Semicircular cover	3	
P15		D3.5" Screw die	3	
P16		L2.56" Candle cover	3	
P17		Check ring	6	
P18		D12" Milk Glass	3	



"L" = Hot wire
"N" = Neutral wire
"E" = Ground wire