

Indoor 54" Ceiling Fan

Туре \_\_\_\_\_

Finish					
			Dim	nensions (Inches)	
 Brushed Nickel	Antique Bronze	White	<u>A</u>	<u>B</u>	
			54	15-1/8	

Blades			
Side 1	Silver	Medium Cherry	White
Side 2	Natural Cherry	Classic Walnut	White

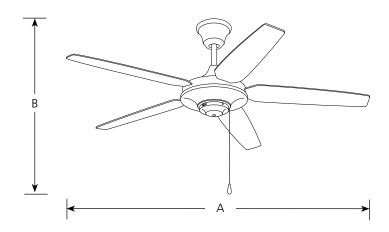



Fan on included 6" downrod.

### **Specifications:**

#### General

• 30 year limited warranty Blades

# Five blades

- Reversible
- 12 degree pitch
- Sure Connect blade attachment system
  - ° Screws preinstalled in blades for attachment to motor arms
  - ° Special guides align blades to motor arms
  - Preinstalled rubber isolation pads minimize vibration noise
- MDF blade construction

## <u>Motor</u>

- Triple capacitor speed control; manual reverse control
- 153mm dia x 18mm high
- Pull chain on brushed nickel is chrome with a maple fob, antique brass is oxide with a walnut fob, and white has

65 watts (excludes lights)

### ENERGY INFORMATION AT HIGH SPEED

**ELECTRICITY USE:** 

AIRFLOW: 4716 CFM cubic feet per minute

AIRFLOW EFFICIENCY: 73 cubic feet per minute per watt

antique chrome chain with white fob Mounting

- Quick Install canopy
- Installs without removing J-box screws
- · Holds fan for wiring during installation
- Downrod mounting
- A 1"x 6" downrod is included. Longer accessory downrods can be ordered separately
- Standard canopy designed for sloped ceilings up to 45 degrees (12:12 ceiling pitch) using downrod supplied or accessory downrods
- Oversized, textured die cast hanger ball reduces noise and wobble vibrations
- Canopy covers standard recessed 4" octagonal outlet box. Note: An outlet box assembly designed for fan installation is required (not included)
- Mounting hardware is included <u>Electrical</u>
  - 80" lead wires included
  - Light fixture adaptable
  - Pre-wired

#### <u>Labeling</u>

UL/CUL listed