


Instructions:

1. Apply thread sealant tape to threads A.
2. Screw valve body B onto pipe C.
3. Place nut D, metal washer E and rubber washer F on
4. Insert tube G into valve.
5. Wrench tighten nut D onto valve.
6. Stop any leaks by tightening nuts slightly.

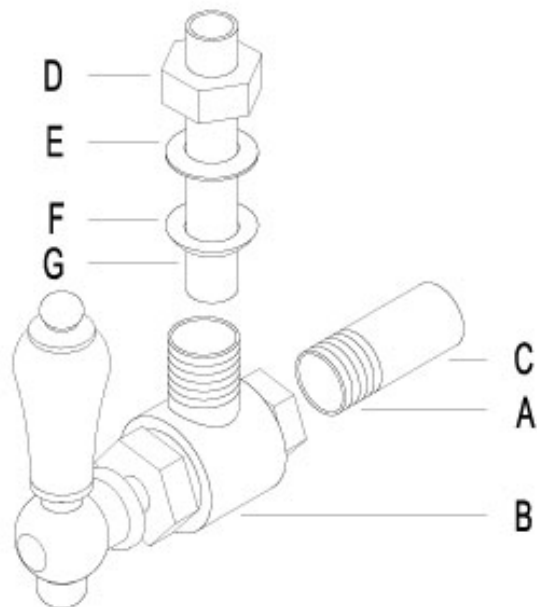

Instructions:

1. Apply thread sealant tape to threads A.
2. Screw valve body B onto pipe C.
3. Place nut D, metal washer E and rubber washer F on tube G.
4. Insert tube G into valve.
5. Wrench tighten nut D onto valve.
6. Stop any leaks by tightening nuts slightly.

