



# Underscore® Rectangle

60" drop-in bath  
**K-1130**

## Features

- Molded lumbar support offers extra comfort while bathing.
- Slotted overflow allows for deep soaking.

## Material

- Acrylic.

## Installation

- Drop-in.

## Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

## Recommended Products/Accessories

K-590 5' under-mount installation kit

K-24916 Wireless Music Kit

K-1601 Bath/Whirlpool Footstop

K-1177 Vinyl Tiling-in Bead

K-23726 Drain treatment

K-23732 Tub & shower cleaner



## Codes/Standards

CSA B45.5/IAPMO Z124

ASTM E162









ASTM E662

## KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*


| Color  | Code | Description   |
|--|------|---------------|
|  | 0    | White         |
|  | 96   | Biscuit       |
|  | NY   | Dune          |
|  | 95   | Ice™ Grey     |
|  | G9   | Sandbar       |
|  | K4   | Cashmere      |
|  | 58   | Thunder™ Grey |
|  | 7    | Black Black™  |






# Underscore® Rectangle

60" drop-in bath

**K-1130**

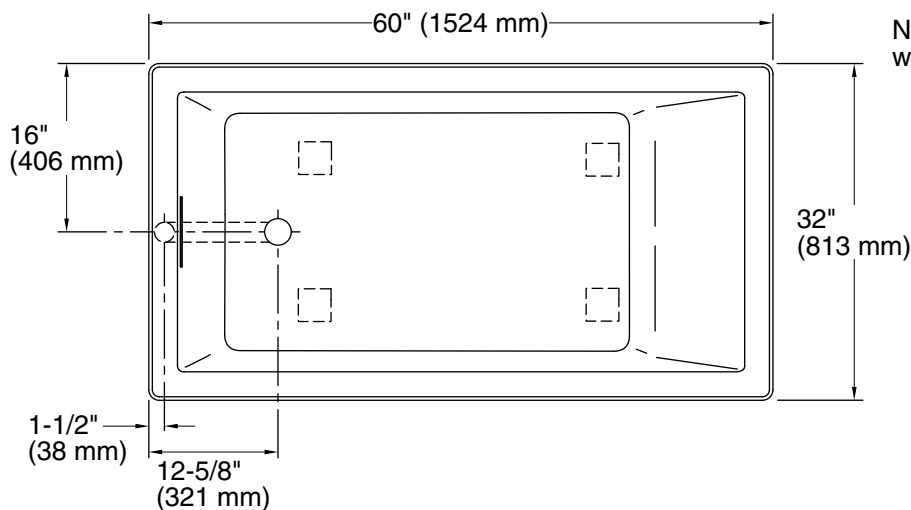

No change in measurements if connected with drain illustrated. (K-7272)

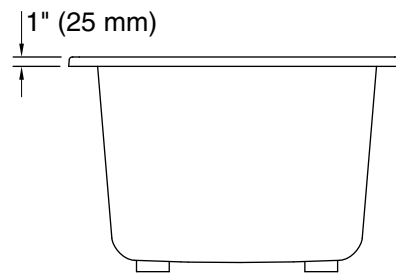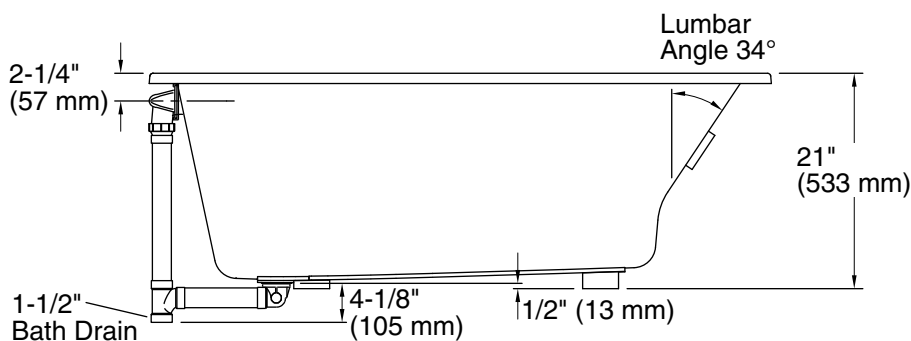

## Technical Information

All product dimensions are nominal.

Installation: Drop-in

Drain location: End

Basin area, bottom: 42" x 23-1/2" (1067 mm x 597 mm)

Basin area, top: 55-1/8" x 27-1/8" (1400 mm x 689 mm)

Weight: 75 lbs (34 kg)

Minimum floor load: 58 lbs/ft<sup>2</sup> (283.2 kg/m<sup>2</sup>)

Water depth: 17-1/8" (435 mm)

Water capacity: 81 gal (306.6 L)

Cutout: Drop-in, 59-1/2" x 31-1/2" (1511 mm x 800 mm)

Minimum flat for door: 2-3/8" (60 mm)

## Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).