

**DESCRIPTION**


A ceiling mount or wall sconce of exaggerated proportions. Unparalleled.

**FEATURES**


- 3CCT (2700K/3000K/3500K) selectable switch
- Driver concealed within the canopy
- 5 year warranty

**SPECIFICATIONS**


Color Temp:	2700K/3000K/3500K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, Title 24: 2019 Damp Location Listed
Construction:	Aluminum body, PC diffuser

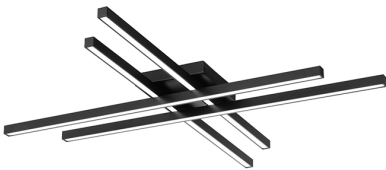

**FINISHES**

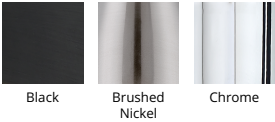

**LINE DRAWING**

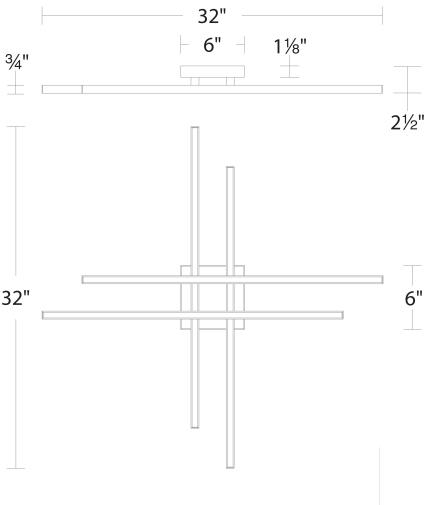

## DESCRIPTION


A ceiling mount or wall sconce of exaggerated proportions. Unparalleled.

## FEATURES


- 3CCT (2700K/3000K/3500K) selectable switch
- Driver concealed within the canopy
- 5 year warranty

## SPECIFICATIONS

Color Temp:	2700K/3000K/3500K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, TRIAC: 100-10%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, Title 24: 2019 Damp Location Listed
Construction:	Aluminum body, PC diffuser

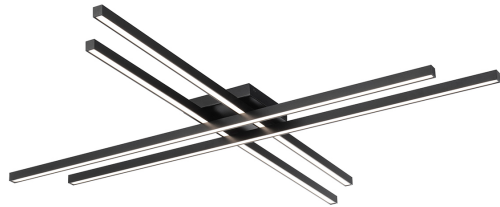

## FINISHES



## LINE DRAWING

