

WAC LIGHTING

Gaze

Pendant 4CCT

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-23412 12"	2700K	BK Black	12 W	570	485
	3000K	BN Brushed Nickel	12 W	570	485
	3500K		12 W	570	485
	4000K		12 W	570	485

Example: **PD-23412-40-BN**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Half and half. A sphere composed of equal parts clear and frosted glass brings your home to life with a combination of bright and diffuse illumination.

FEATURES

- Three 12" and one 6" downrods included (additional downrods available)
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy

SPECIFICATIONS


Color Temp:	4000K,3500K,3000K,2700K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL,Title 24 JA8 Compliant Damp Location Listed
Construction:	Aluminum hardware with glass diffuser

REPLACEMENT PARTS

- RPL-GLA-23412 - RPL Glass for PD-23412
- RPL-ROD-IN12-BK-01 - 12" Rod BK
- RPL-ROD-IN12-BN2-1 - 12" Rod BN
- RPL-ROD-IN06-BK-01 - 6" Rod BK
- RPL-ROD-IN06-BN2-1 - 6" Rod BN




FINISHES:



Black

Brushed
Nickel

LINE DRAWING:

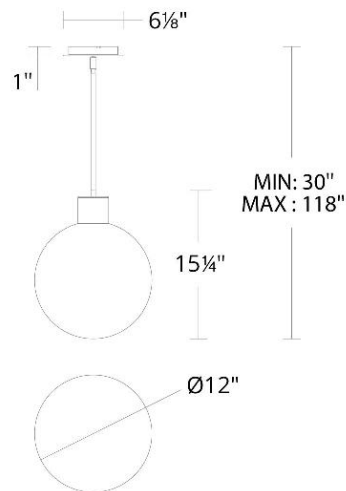

PD-23412

WAC LIGHTING