


General Assembly Guidelines


- I. Ensure that all parts and hardware are available before beginning assembly.
- II. Follow each step carefully to ensure the proper assembly of this product.
- III. Two people are recommended for ease in the assembly of this product.
- IV. The three main types of hardware used to assemble this product are : wood dowels , screws and bolts.
- V. The provided glue is to secure wood dowels in place. When first inserting dowels, locate the appropriate hole for the dowel, place a small amount of glue in the hole and insert the dowel. Wipe away excess glue immediately.




In future assembly steps when dowels are necessary to attach assembly parts together, place a small amount of glue on the end of the dowel before attaching parts together. Wipe away excess glue immediately.



VI. A Phillips head screwdriver is required for the assembly of this product.




VII. Power tools should not be used to assemble this product.




All rights reserved.

P.2

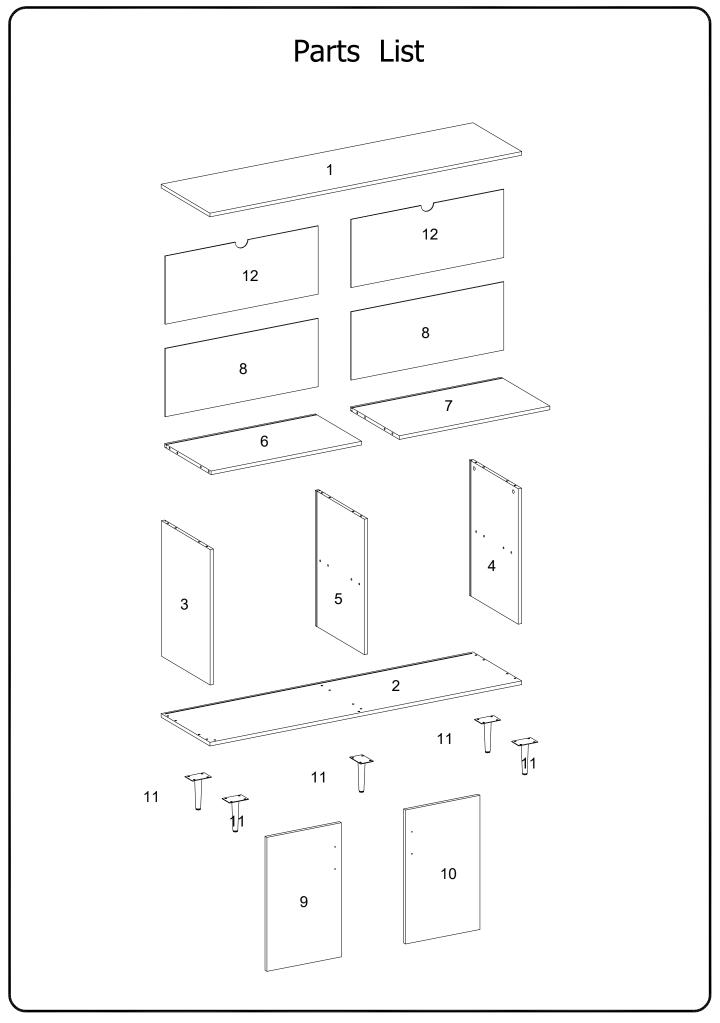

Hardware List

Α		Ø8x30mm	Wooden dowel	20	pcs
В		Ø6x35mm	Cam bolt	14	pcs
С		Ø15x11mm	Cam lock	14	pcs
D	(0)	Ø6x50mm	Bolt	6	pcs
E			Handle	2	pcs
F	(S)	Ø4x22mm	Handle Bolt	4	pcs
G			Bolt	2	pcs
Н	500		Door stopper	1	pcs
J			Door Hinge	2	pcs
K			Door Hinge	2	pcs
L			Plastic pivot	4	pcs
М	<=====================================	Ø3x12mm	Screw	8	pcs
N		Ø6x12mm	Bolt	20	pcs
Р		Ø3x17mm	Screw	16	pcs
Q			Glue tube	1	pcs
R		Ø30mm	Sticker	14	pcs
S		M 4	Hex Key	1	pcs
Т			Plastic wedge	16	pcs
U	!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!</td <td>Ø3x15mm</td> <td>Screw</td> <td>2</td> <td>pcs</td>	Ø3x15mm	Screw	2	pcs




Philips head screwdriver required for assembly (not included)

The hardware quantities listed above are required for proper assembly.

Some extra hardware may also have been included.


All rights reserved. P.4



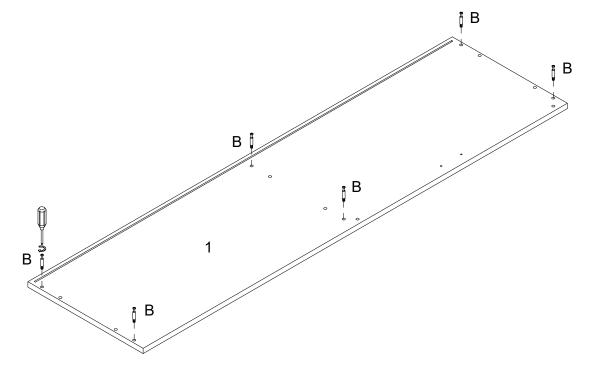


Attach cam bolt (B) to part (1) with screwdriver.

Step 2

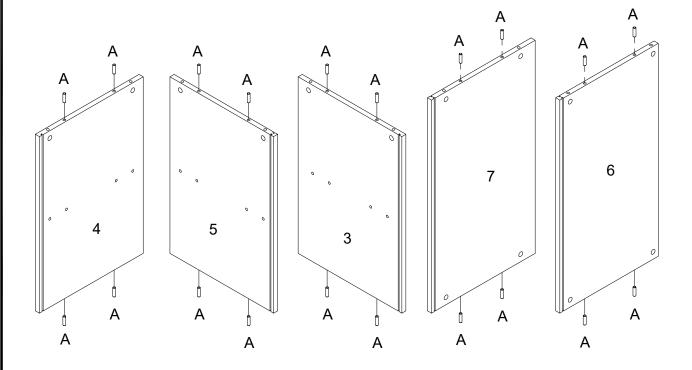


Insert wooden dowel (A) into part (3,4,5,6,7).

Step 3

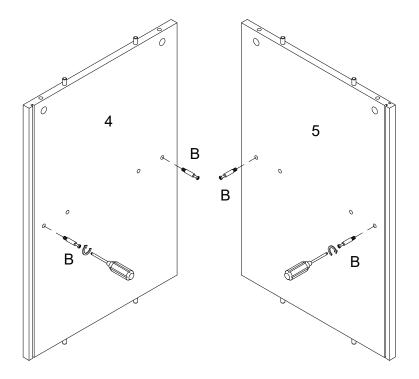

Attach cam bolt (B) to part (4,5) with screwdriver.


Step 4

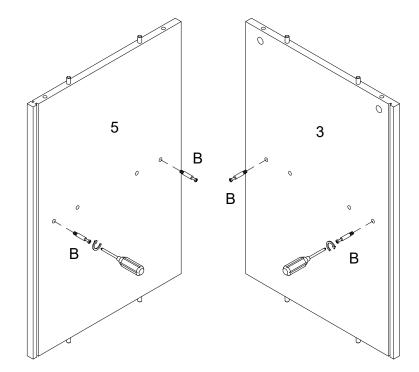


Attach cam bolt (B) to part (3,5) with screwdriver.






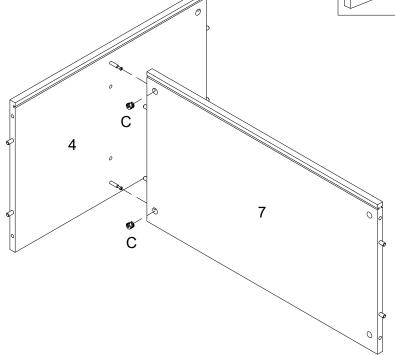


Attach part (4) to part (7), then insert and secure cam lock (C) to part (7) to lock it.

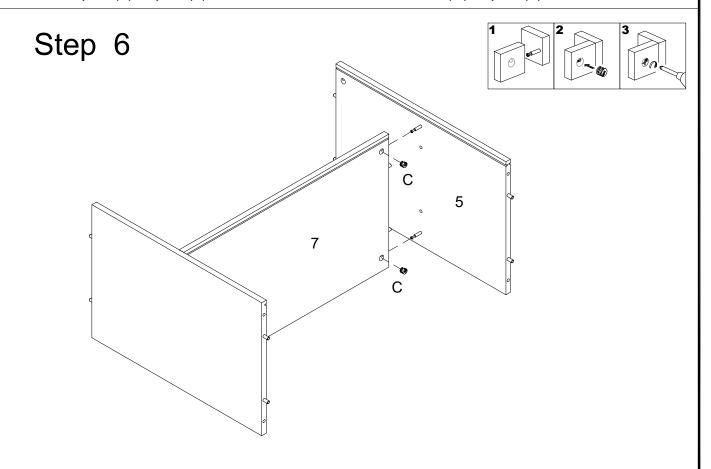



Attach part (5) to part (7), then insert and secure cam lock (C) to part (7) to lock it.

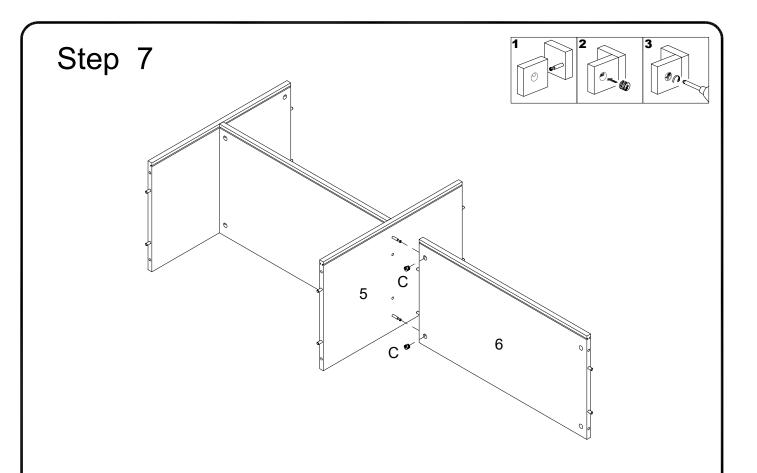


Attach part (5) to part (6), then insert and secure cam lock (C) to part (6) to lock it.

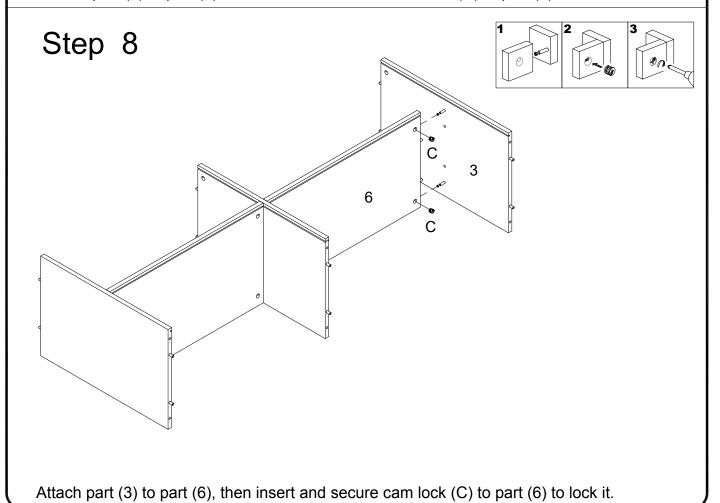

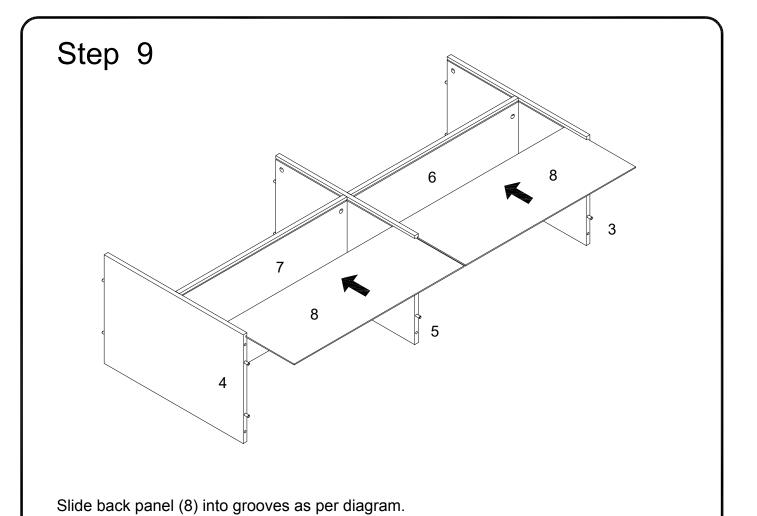


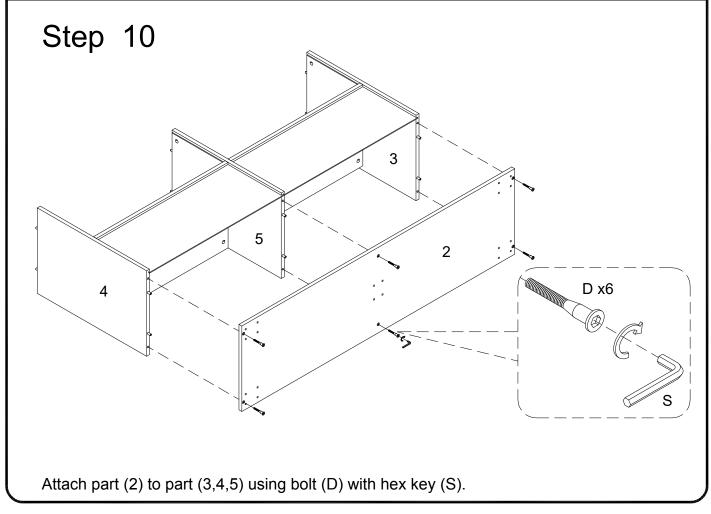

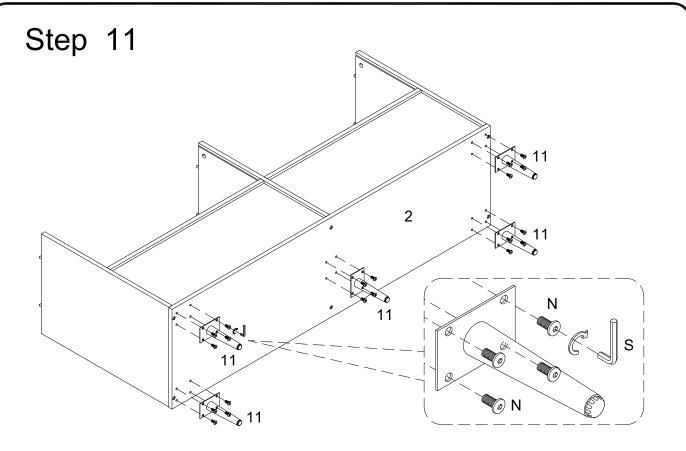


Attach part (11) to part (2) using bolt (N) with hex key (S).


Step 12

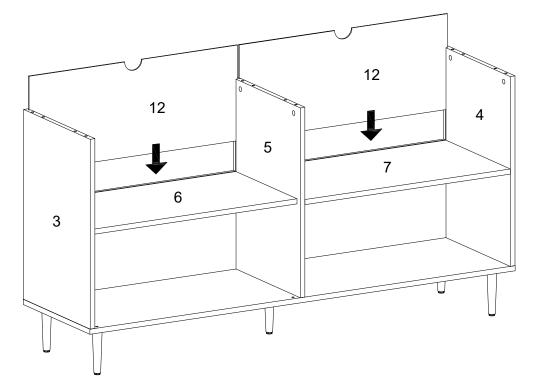

Slide back panel (12) into grooves as per diagram.






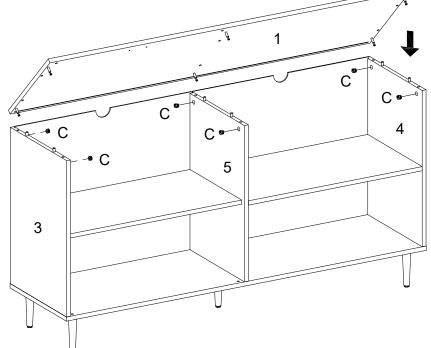


Attach part (1) to part (3,4,5), then insert and secure cam lock (C) to part (3,4,5) to lock it.

Step 14

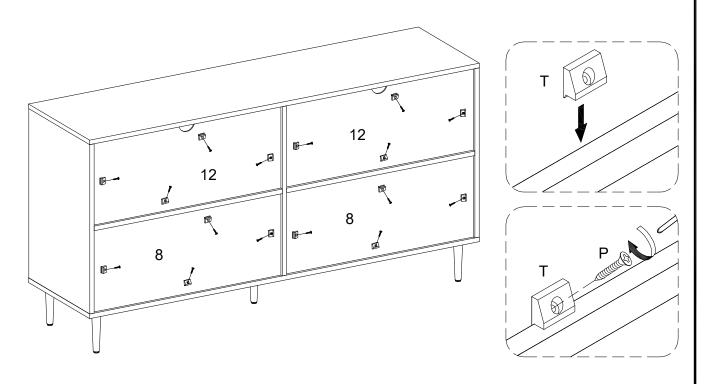


Attach plastic wedge (T) to part (8,12) using screw (P) with screwdriver.



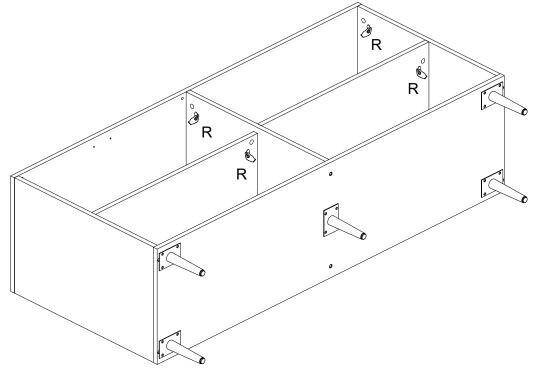


Place sticker (R) over holes as per diagram.

Step 16

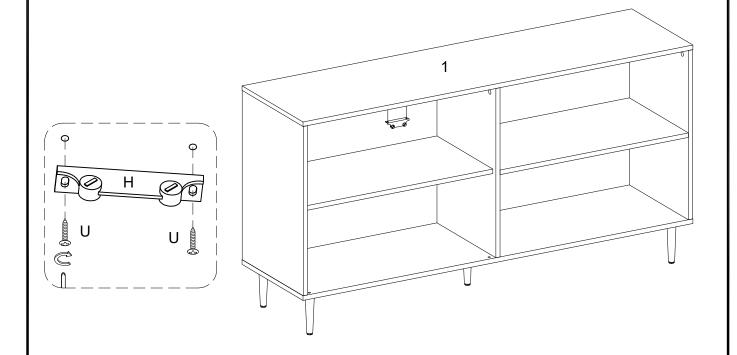


Attach door stopper (H) to part (1) using screw (U) with screwdriver.

Step 17

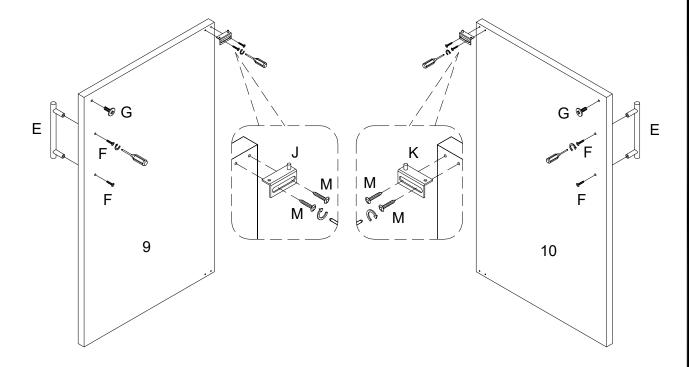


Attach handle (E) to part (9,10) using handle bolt (F) with screwdriver. Attach door hinge (J,K) to part (9,10) using screw (M) with screwdriver. Attach bolt (G) to part (9,10) with screwdriver.


Step 18

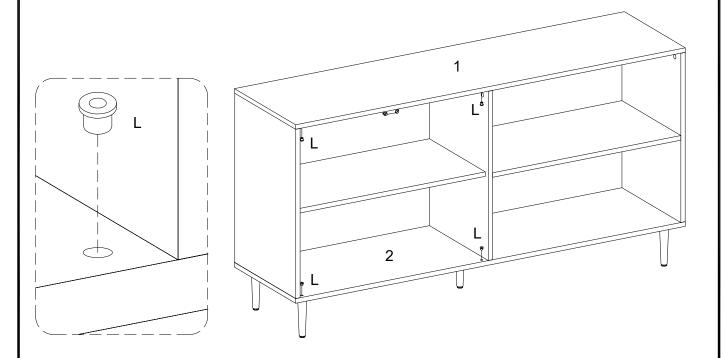

Place plastic pivot (L) over holes as per diagram.

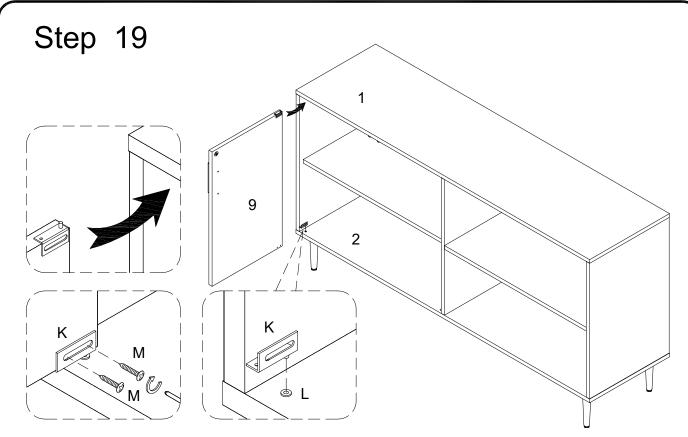

Place door hinge (K) into plastic pivot (L) on part (2). Insert top door hinge into plastic pivot (N) on part (1), then slide the door (9) into the bottom hinge (K). Secure door by tightening door hinge (K) using screws (M) with equal pressure.

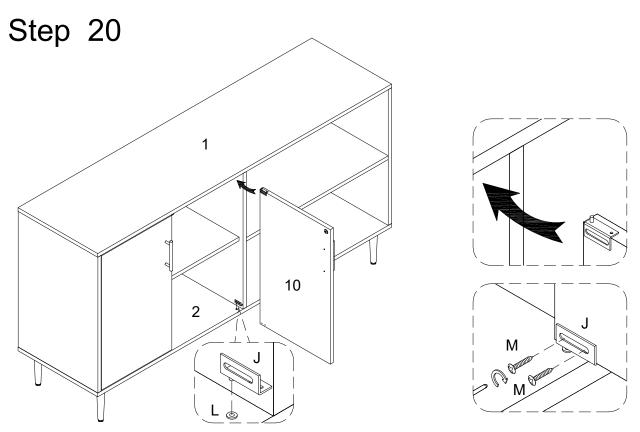

Place door hinge (J) into plastic pivot (L) on part (2). Insert top door hinge into plastic pivot (N) on part (1), then slide the door (10) into the bottom hinge (J). Secure door by tightening door hinge (J) using screws (M) with equal pressure.

