

### Features

- Katalyst® Spray Technology with air induction ball joint.
- Optimized sprayface for maximum performance.
- Single-function showerhead with 48 nozzle 5-1/2" (140 mm) diameter sprayface.
- Complements Forté® Suite.
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup.
- 1/2" - 14 NPT connection.
- 1.75 gpm (6.6 lpm) maximum flow rate.

### Installation

- Shower arm and flange sold separately.

### Recommended Products/Accessories

K-7397 Shower Arm and Flange  
K-23723 Faucet cleaner



### Codes/Standards







ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)



### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	AF	Vibrant® French Gold
	PB	Vibrant® Polished Brass
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	2BZ	Oil-Rubbed Bronze

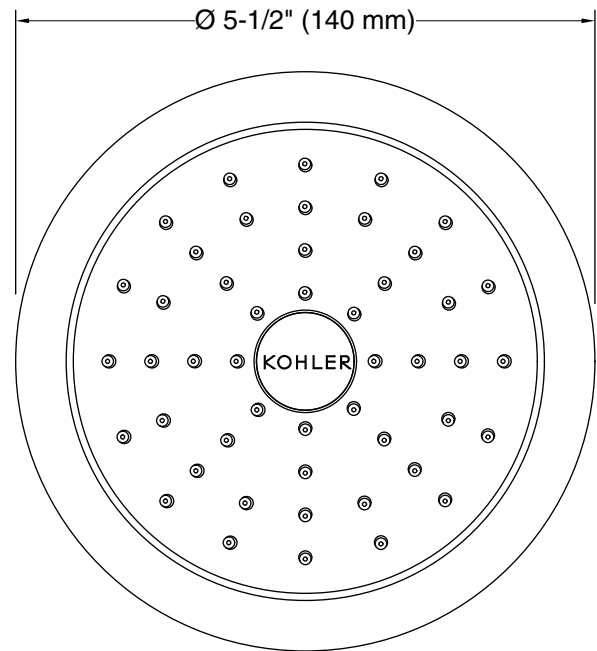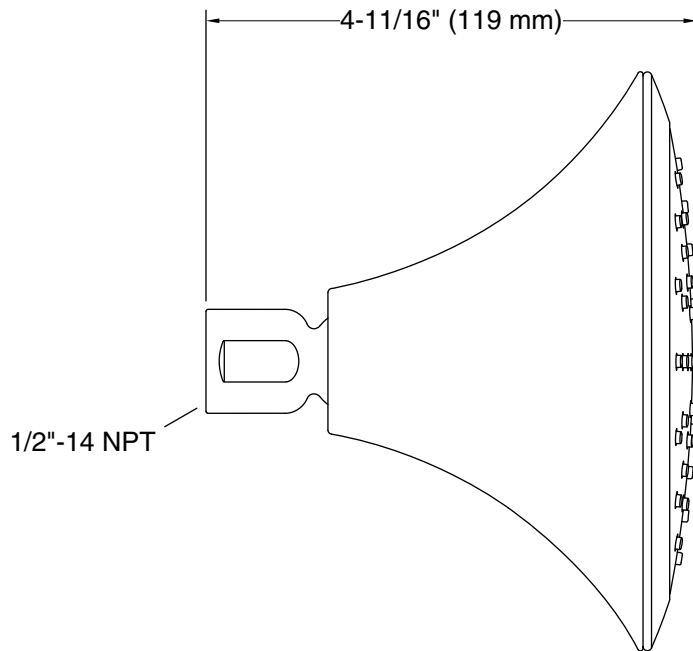

## Technical Information

All product dimensions are nominal.

### Showerhead/Body Spray:

Rated maximum flow: 1.75 gal/min (6.6 l/min)

Pressure: 80 psi (5.5 bar)

## Notes

For use with automatic compensating valves rated at 1.5 gal/min (5.7 l/min) or less.

Install this product according to the installation instructions.