

Specifications

DESCRIPTION

- · Metal construction
- Designed to be installed on decks up to 1-7/8" (48mm) on 10" centers

OPERATION

 Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle clockwise to open (counterclockwise to close)

FLOW

• Designed to deliver 16 gpm at 45 psi. (60L/min)

CARTRIDGE


• Nonmetallic and stainless steel materials

STANDARDS

- Designed and manufactured to comply with the applicable requirements of: ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein
- ADA 🕒 for lever handles


WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



Banbury™ Two-Handle Roman Tub Faucet Trim

Models: 86924 series

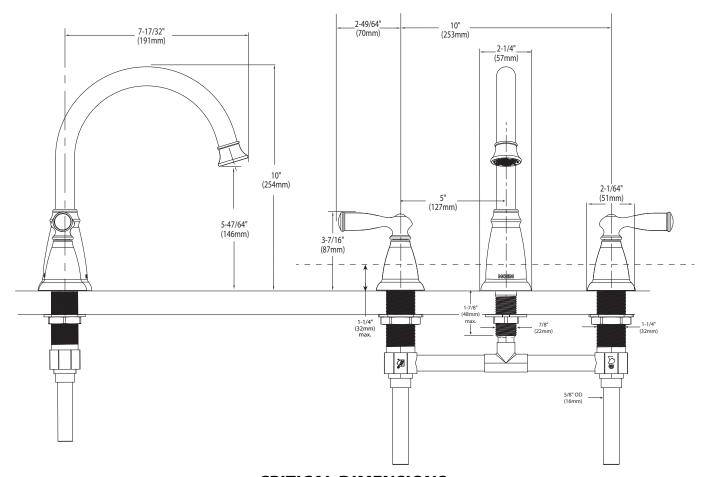

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com