# MOEN

# There is more than 1 version of this model.

#### Page down to identify the version you have.

### **FAUCET DESCRIPTION**

- Reflex<sup>™</sup> pulldown system offers smooth operation, easy movement and secure docking
- Metal construction with various finishes identified by suffix
- Duralock<sup>™</sup> quick connect system
- Power Boost<sup>™</sup> Technology provides boosted water performance with the push of a button
- Pullout spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pull out wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout

### **OPERATION**

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position
- FLOW
- Standard flow is limited to 1.5 gpm (5.7 L/min) at 60 psi
- Power Boost<sup>™</sup> Button activates Boosted Stream and Boosted Spray
- CARTRIDGE
- 1255<sup>™</sup> Duralast<sup>™</sup> cartridge for Single-Handle Faucets


### **STANDARDS**

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating
- check valves, a primary and a secondary which prevent backflow
- ADA 🛃 for lever handle

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

# Specifications




# **BRANTFORD**<sup>™</sup> **Single Handle High Arc Pulldown Kitchen Faucet**

### Models: 7185 series

**NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED** THROUGH 1 OR 3 HOLES, 1-1/2" (38mm) MIN. DIA.



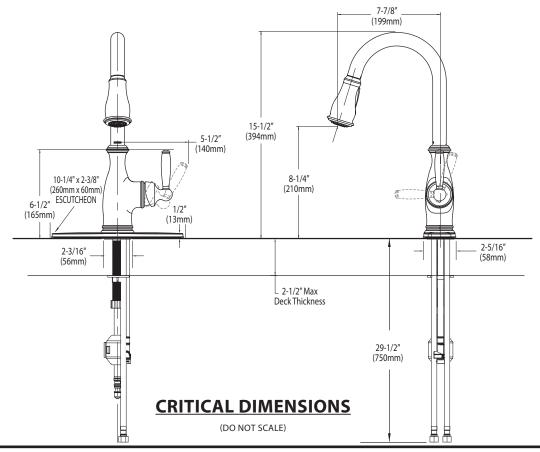

# MOEN®

### FAUCET DESCRIPTION

- Reflex<sup>™</sup> pulldown system offers smooth operation, easy movement and secure docking
- Power Clean<sup>™</sup> spray technology
- Metal construction with various finishes identified by suffix
- Quick connect installation
- Pullout spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pull out wand provides the maneuverability for cleaning or rinsing 360° rotating spout

### **OPERATION**

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position
- When filling a vessel outside the sink, the pause feature conveniently stops the flow of water as the wand passes over the counter top

### FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi
- Power Boost<sup>™</sup> Button activates Boosted Stream and Boosted Spray

### CARTRIDGE


1255<sup>™</sup> Duralast<sup>™</sup> cartridge for Single-Handle Faucets

### **STANDARDS**

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- · ADA for lever handle

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations



# **BRANTFORD**<sup>™</sup> **Single Handle High Arc Pulldown Kitchen Faucet**

## Models: 7185 series

**NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED** THROUGH 1 OR 3 HOLES, 1-1/2" (38mm) MIN. DIA.



