

Project:

# Thin-Line LED Pendant Spec Sheet

SKU: 2816.25-4 Learn more at:


https://sonnemanlight.com/thin-line-led-pendant

Description:

A system of minimally scaled LED linear pendants, uplight/downlight wall Il bars, Thin-Line is offered in a variety of lengths, finishes, and lighting configurations. Thin-Line pendants are available in single- and double-sided configurations; the single-sided configurations can be installed as a downlight or up-light, providing direct or indirect illumination. Our Optional Mini Box Canopy is also available for the Thin-Line LED Pendant.

Type #:

Size:

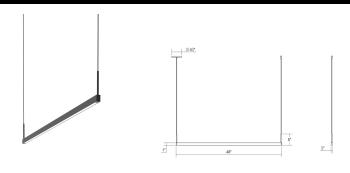

### **Dimensions**

Height: 5" Width: 48" Length: 0.75" Canopy/Backplate/Base: 4.5" Hanging Details: Adjustable

Cord 4' One-Sided

Canopy/Backplate/Base Height: 0.5

## **Electrical Specs**

Bulb(s) Included?: Yes Integral LED Bulb 1 Type: Bulb Quantity: Input Voltage: 120VAC Wattage: 22 Initial Lumens: 1450 **Delivered Lumens:** 900 Color Temperature: 3000K CRI: 90 Power Supply Type: Power Supply Quantity: Driver Power Supply Location: Remote Dimming Type: Bulb Max Wattage: TRIAC/ELV

#### Installation

Installation: Licensed electrician required Sloped Ceiling Compatible?: Compatible Minimum Hanging Height: 5.75" 73.75" Maximum Hanging Height:

### Shipping

Carton 1 L x W x H: 51" X 7" X 4" Carton 1 Gross Weight: 5 LBS

#### Shade

Shade 1 Material: Aluminum w/Optical Acrylic

#### Available Finishes

Available Finishes: Bright Satin Aluminum (.16), Satin Black (.25), Satin White (.03)

### **General Listings**

Features: Damp Rated Certification: cETL Color/Finish: Satin Black Ň

(.25)

Dark Sky Friendly: