

### Features

- Handshower features transitional design.
- Advanced spray engine provides three spray experiences: full coverage, drenching rain, and intense massage spray.
- Full coverage spray produces an encompassing spray for everyday use and utilizes air induction to create large, full drops.
- Drenching rain delivers a soothing circular water pattern.
- Intense massage spray targets sore muscles to ease away aches and pains.
- 1.5 gpm (gallons per minute) flow rate.
- Full 360 degree rotation of entire sprayface cycles through spray functions.
- Silicone sprayface is easy to clean.

### Material

- KOHLER finishes resist corrosion and tarnishing.

### Installation

- Bracket or slidebar required for wall-mount installation.
- Deck-mount holder required for deck-mount installation.

### Water Conservation & Rebates

- WaterSense-labeled 1.5 gpm handshowers use up to 40 percent less water than standard 2.5 gpm handshowers, while still meeting strict performance guidelines.
- This product can help a building earn Water Efficiency points in the LEED Green Building Rating System.

### Required Accessories

- K- 8593 72" Shower Hose  
or  
K- 9514 60" Shower Hose  
or  
K- 45981 Shower Hose  
or  
K- 45982 Shower Hose



### Codes/Standards



ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®


### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel

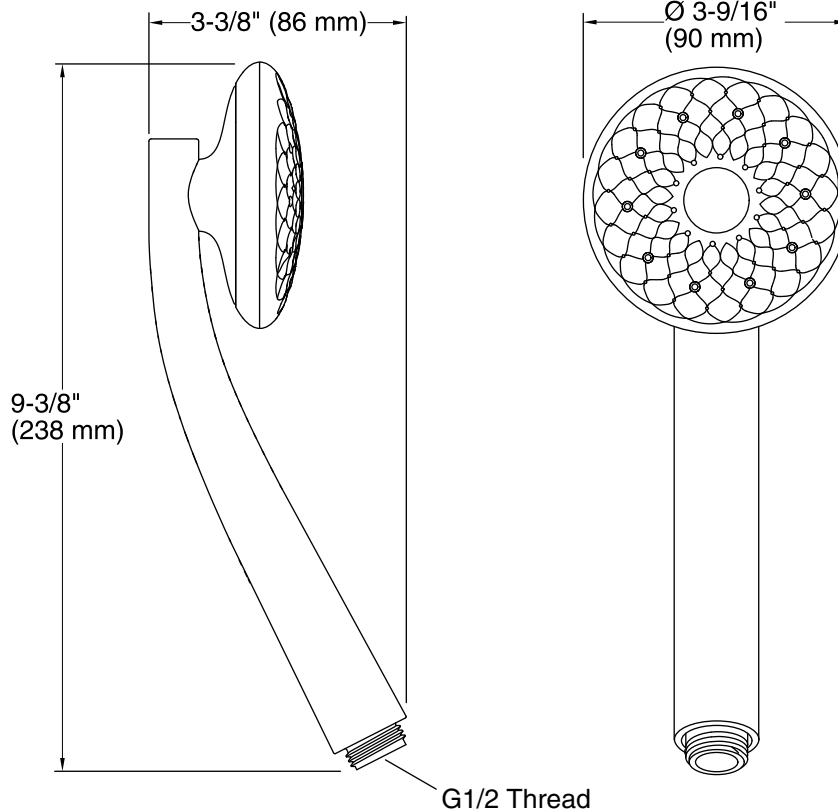

#### Technical Information

All product dimensions are nominal.

#### Handshower:

Rated maximum flow: 1.5 gal/min (5.7 l/min)

#### Notes

Install this product according to the installation guide.

Plumbing codes require approved backflow prevention devices to be installed in-line to handshowers. Please consult with local plumbing officials.