

Shift[®]+ Round

1.75 gpm multifunction handshower

Features

- Multi-function handshower offers full-coverage and targeted massage spray settings.
- Ergonomic design is comfortable and easy to grip.
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup.
- 1.75 gpm (6.6 lpm) flow rate.
- Contains flow-regulating check valve for backflow prevention.

Water Conservation & Rebates

 This product can help a building earn Water Efficiency points in LEED[®] Green Building Rating System.

Required Products/Accessories

K-8593 72" Shower Hose

K-9069 24" shower slidebar

or

K-9069 24" shower slidebar

K-9514 60" Shower Hose

or

K-14791 wall-mount handshower holder with supply elbow K-8593 72" Shower Hose

or

K-14791 wall-mount handshower holder with supply elbow K-9514 60" Shower Hose

or

K-14789 deck- or bath-mount handshower holder with hose

Recommended Products/Accessories

K-23723 Faucet cleaner

Optional Products/Accessories

K-9660 Vacuum Breaker





Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense[®] California Energy Commission (CEC) OBC

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BGD	Vibrant® Moderne Brushed Gold
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	2BZ	Oil-Rubbed Bronze
	BL	Matte Black
	2MB	Vibrant Brushed Moderne Brass
	RGD	Vibrant Rose Gold
	ΤT	Vibrant Titanium



Shift®+ Round

KOHLER. Faucets

1.75 gpm multifunction handshower K-21335-G

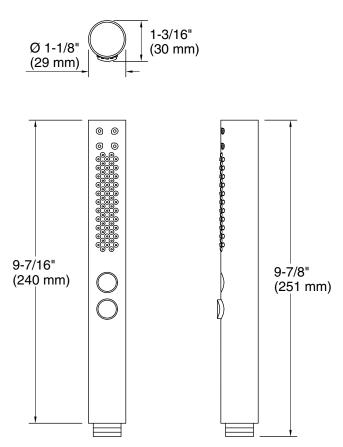

Technical Information

All product dimensions are nominal. Drain included: No

Handshower:

Rated maximum flow:1.75 gal/min (6.6 l/min)Pressure:80 psi (5.5 bar)

Notes

For use with automatic compensating valves rated at 1.5 gal/min (5.7 l/min) or less.

Install this product according to the installation instructions.

Plumbing codes may require that a vacuum breaker be installed in-line to handshowers. Please consult local plumbing codes.

OBC compliant when installed to the specific requirements of these regulations.

