

# HIBISCUS

## FREESTANDING TUB FILLER

SKU: 948658



### FEATURES

- Spout max. flow rate: 8.5 gpm (32.2 L/min) @ 60 psi.
- Hand shower max. flow rate: 1.8 gpm (6.8 L/min) @ 80 psi.
- Single function hand shower (full spray).
- Integral diverter to hand shower.
- Handshower includes factory installed backflow prevention check valve.
- Optional rough-in valve includes stops.
- Underfloor access is required for proper installation.
- Installation on an existing concrete slab will require cutting and concrete removal.

### SIGNATURE HARDWARE Lifetime Warranty

See website for detailed warranty information.

### CONTENTS


TUB FILLER .....	PAGE 2
VALVE .....	PAGE 3

REVISED 02/14/2020

# HIBISCUS

## FREESTANDING TUB FILLER

SKU: 948658

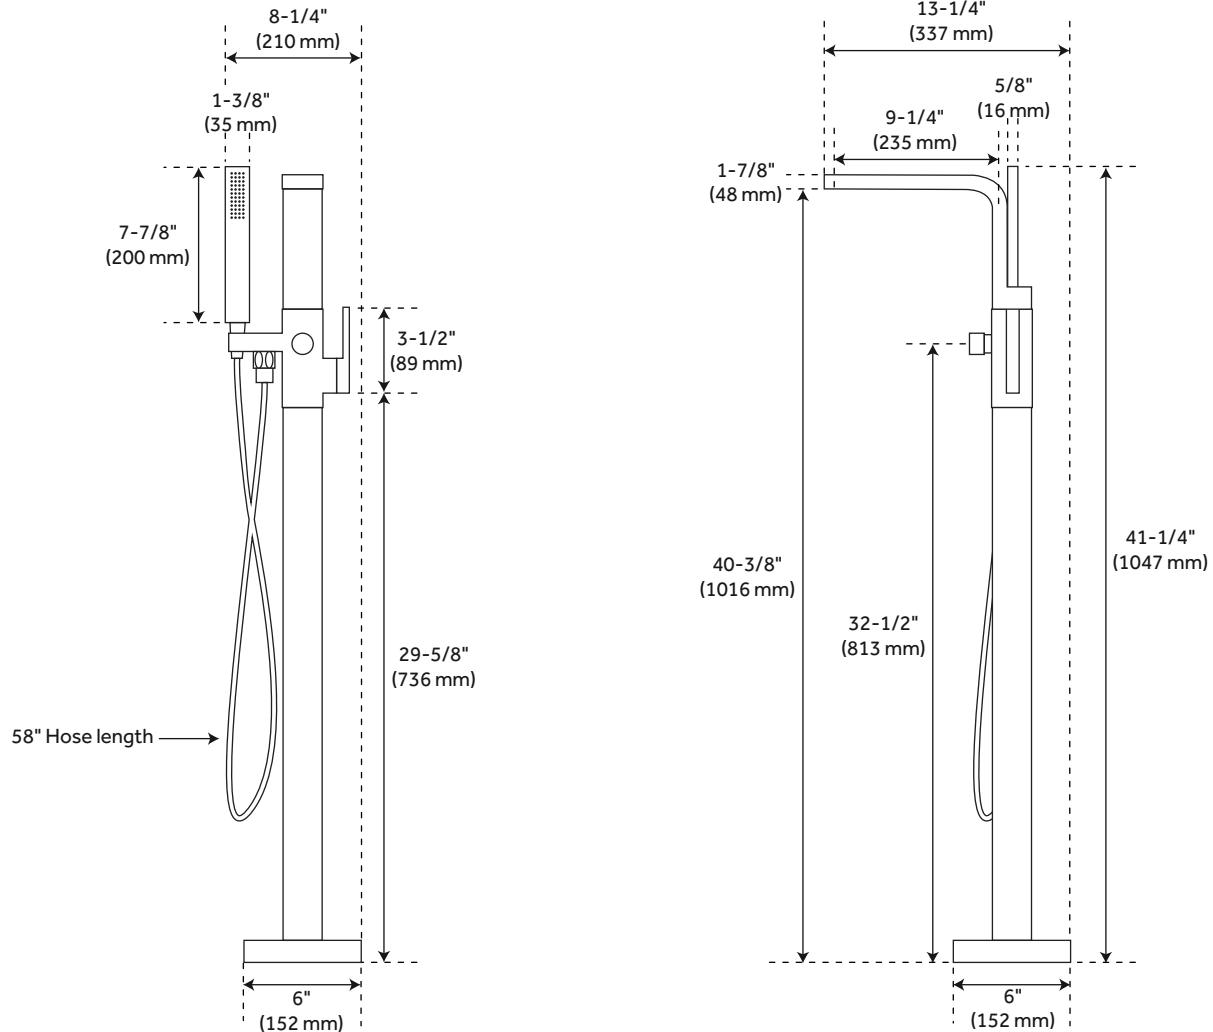

### FEATURES

Installation Type: Freestanding  
Handle Type: Lever  
Tub Faucet Material: Brass  
Length: 8-1/4"  
Width: 13-1/4"  
Height: 41-1/4"  
Height To Spout: 40-3/8"  
Height to Control Valve: 32-1/2"  
Spout Reach: 9-1/4"  
Spout Width: 1-7/8"  
Hot and Cold Indicators: No  
Drain Included: No  
Base Plate Length: 6"  
Base Plate Width: 6"  
Ceramic Disc Cartridges: Yes  
Hand Shower Hose Length: 58"  
Hand Shower Material: Zinc

### CODES/STANDARDS

cUPC  
ASME A112.18.1/CSA B125.1  
ASME A112.18.3  
ICC/ANSI A117.1 (when installed according to  
ADA Standards)  
WaterSense  
CEC Listed  
Massachusetts Accepted



### SIGNATURE HARDWARE LIFETIME WARRANTY

See website for warranty information




All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

REVISED 01/15/2020  
Code: SHHBFS2000GMB/SHHBFS2000GBN  
SHHBFS2000GCP

# FREESTANDING

## TUB FAUCET ROUGH-IN VALVE

SKU: 448006

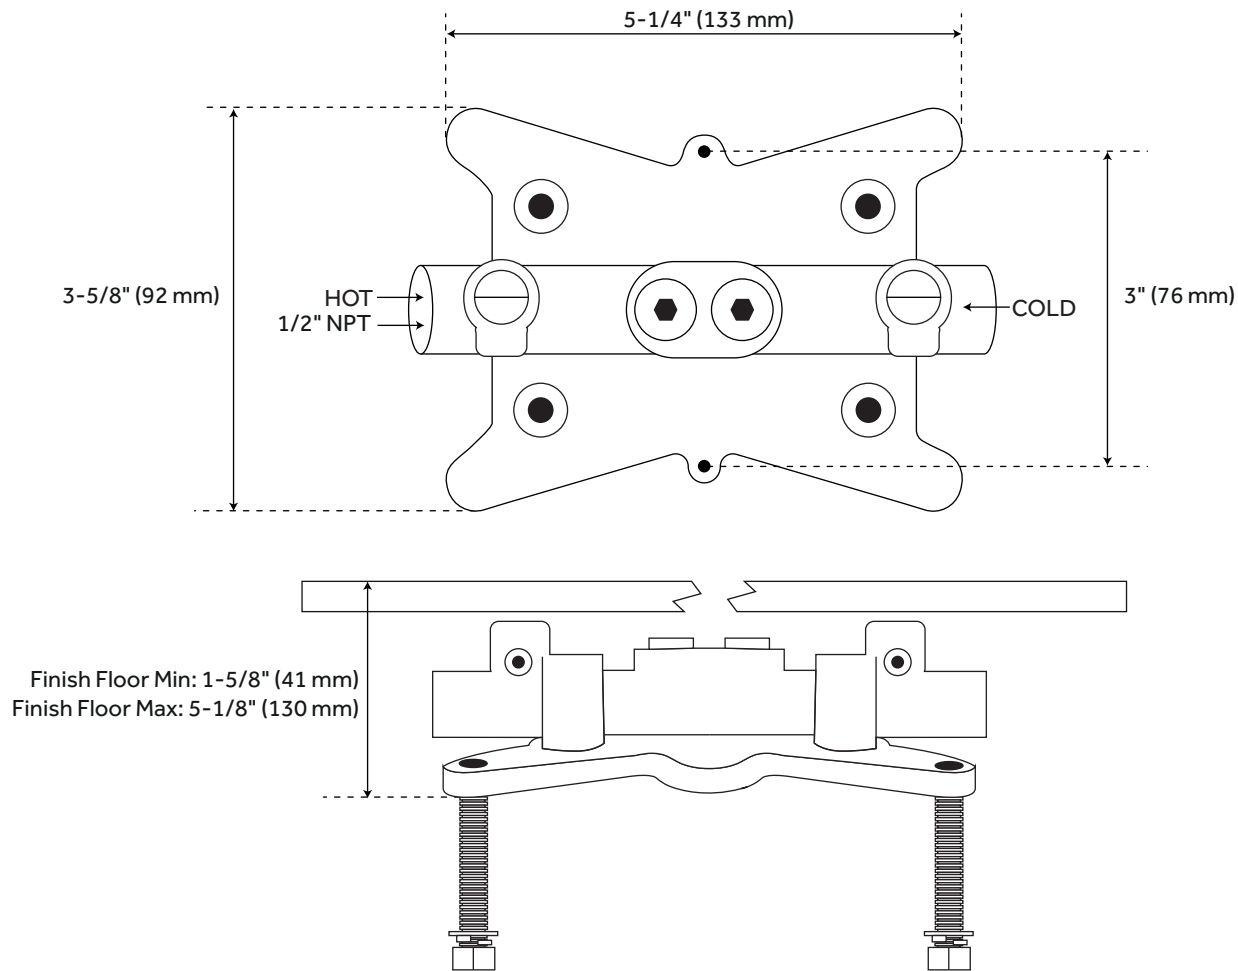

### FEATURES

Material: Brass  
Length: 5-1/4"  
Width: 3-5/8"  
Height: 5-1/8"  
NPT Connection: 1/2"

### CODES/STANDARDS

cUPC  
ASME A112.18.1/CSA B125.1  
Massachusetts Accepted

### SIGNATURE HARDWARE LIFETIME WARRANTY

See website for warranty information

