

Features

- Panel utilizes an integrated system of four 22-nozzle, fully adjustable sprayheads for stimulating hydrotherapy.
- Low-profile design complements any decor.
- MasterClean™ sprayface is easy to clean.
- 0.6 gpm (gallons per minute) maximum flow rate from each sprayhead for a maximum combined flow of 2.4 gpm (gallons per minute)
- 1/2-inch NPT connections.


Material

- KOHLER finishes resist corrosion and tarnishing.

Installation

- Ceiling-mount
- Soldering template included for ease of installation.

Loose component/s: Soldering Template.

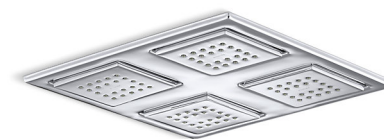

Codes/Standards






ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992




KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|--|------|--------------------------|
|  | CP | Polished Chrome |
|  | SN | Vibrant® Polished Nickel |
|  | AF | Vibrant® French Gold |
|  | BN | Vibrant® Brushed Nickel |
|  | BV | Vibrant® Brushed Bronze |
|  | 2BZ | Oil-Rubbed Bronze |

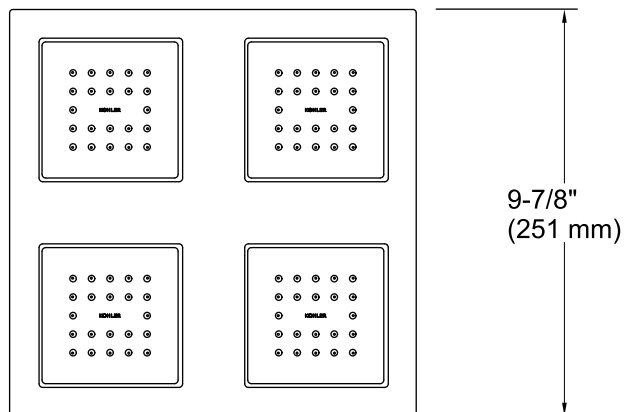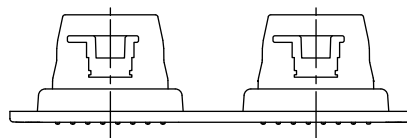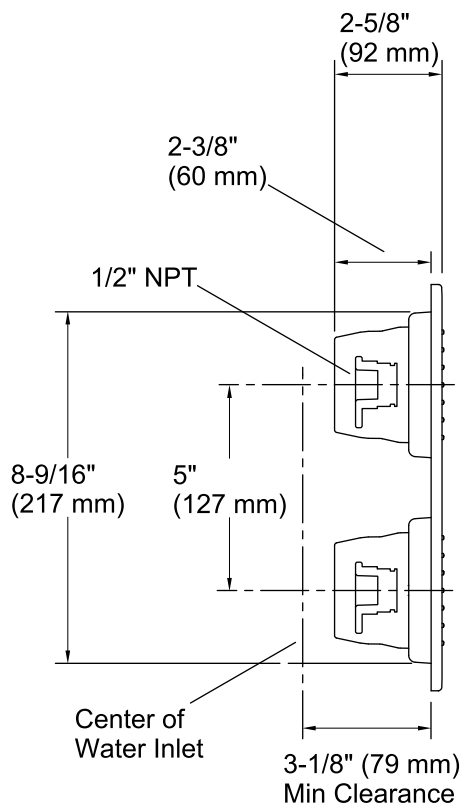

Technical Information

All product dimensions are nominal.

Showerhead/Body Spray:

Rated maximum flow: 2.5 gal/min (9.5 l/min)

Pressure: 80 psi (5.5 bar)

Notes

Install this product according to the installation guide.