

Features


- Handshower features contemporary design.
- Advanced spray engine provides three alternate experiences: wide coverage, intense drenching, and targeted spray.
- Wide coverage spray produces an encompassing spray for everyday use.
- Intense drenching spray delivers a forceful spray ideal for rinsing soap from hair.
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray.
- Thumb tab allows for a smooth transition between sprays.
- Spray nozzles cover full area of sprayhead.
- Combination of balance, weight, grip, and angle makes this handshower comfortable and easy to use.
- MasterClean™ sprayface is easy to clean.
- 2.0 gpm (gallons per minute) flow rate.
- 24-inch slidebar features adjustable mounting brackets for installation flexibility.
- Includes 60-inch ribbon hose.

Material

- LER finishes resist corrosion and tarnishing.

Water Conservation & Rebates

- WaterSense®-labeled 2.0-gpm handshowers use up to 20 percent less water than standard 2.5-gpm handshowers, while still meeting strict performance guidelines.
- This product can help a building earn Water Efficiency points in the LEED® Green Building Rating System.

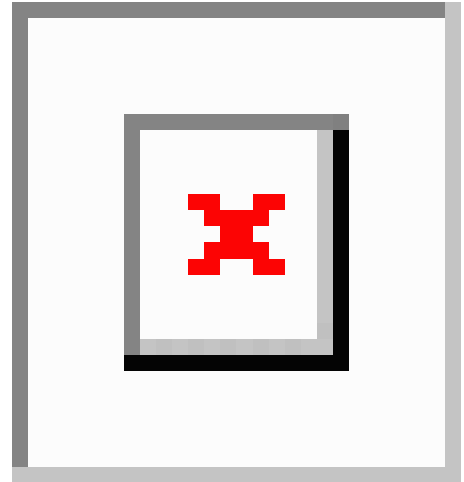

For complete listing of available colors, go to kohler.com.



Codes/Standards


ASME A112.18.1/CSA B125.1
EPA WaterSense®

Kohler Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Product Specification

The slidebar kit shall be 24" (610 mm) in length offering a custom shower at various heights. Kit shall include slidebar, 60" (1524 mm) shower hose, and multifunction handshower. Kit shall feature adjustable mounting brackets on the slidebar providing installation flexibility. Kit shall feature a finish engineered to resist corrosion and daily wear. Kit shall feature lightweight handshower designed for easy use and added mobility. Kit shall feature 3-function handshower with wide coverage, intense drenching, and targeted spray options. Handshower offers 2.0 gal/min (7.6 l/min) maximum flow rate. Kit shall feature MasterClean sprayface for easy cleaning. Kit shall have superior quality 1/2" brass hose fittings built to last. Slidebar kit shall be Kohler Model K-98362.

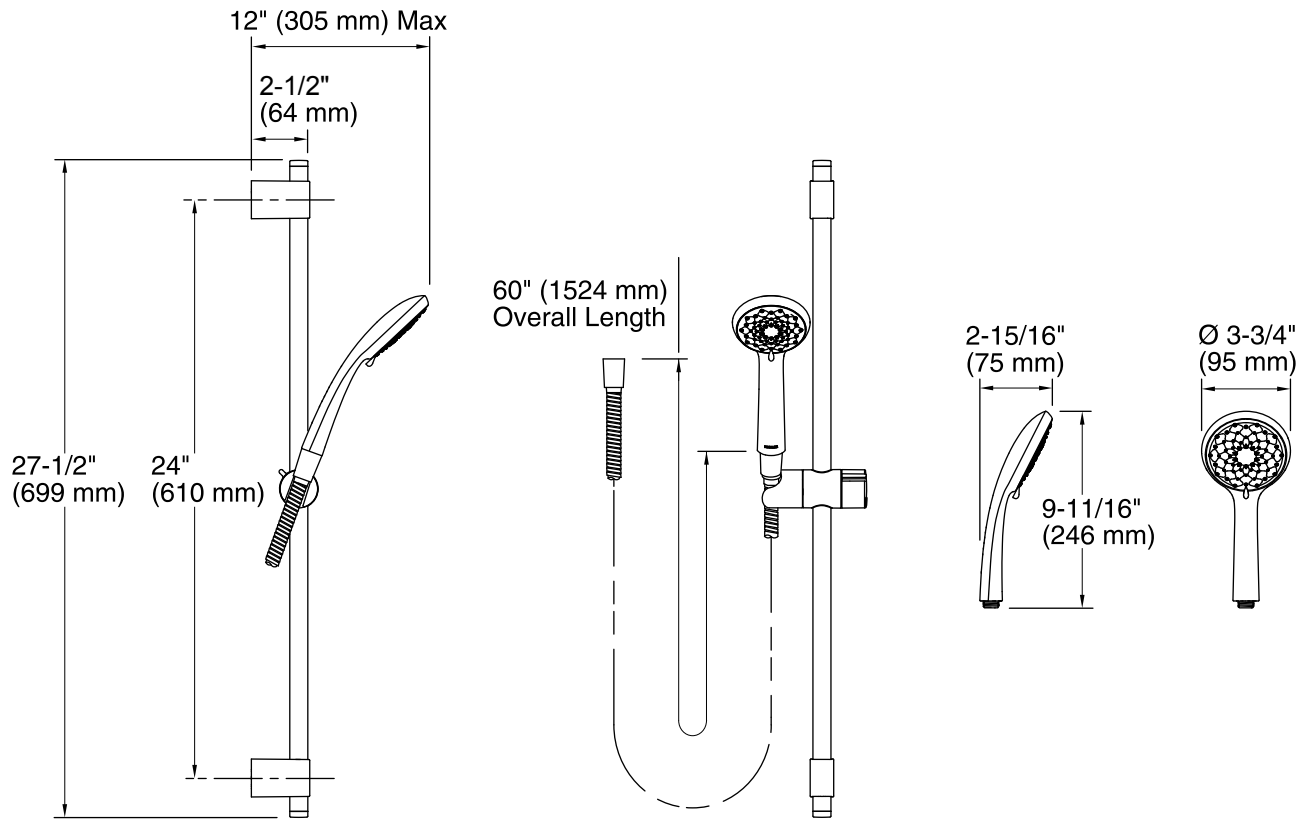

Technical Information

All measurements are nominal.

Pressure: 45 psi (3.1 bar)

Installation Notes

Install this product according to the installation guide.

Mount the slidebar to stud framing or install backing support. For tile or other solid finish surfaces: Predrill mounting holes through surface material only; do not drill into the stud. For drywall surface: No predrill is required.

NOTE: The mounting brackets can be adjusted to align with existing holes for retrofit installations.