

## DESCRIPTION

- Brass Construction
- 1/4 turn stops on each inlet (some models)
- Available with PEX, Cold Expansion PEX
- Shower outlet matches inlet connection type
- Tub outlet is a pre-fabricated 1/2" copper tube

## OPERATION

- Supplied Flush Plug allows testing up to 200 PSI with air (300 PSI water)
- Installation in thin or thick wall applications

## CARTRIDGE


- Cartridge is supplied in the M-CORE™ Trim Kit

## STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

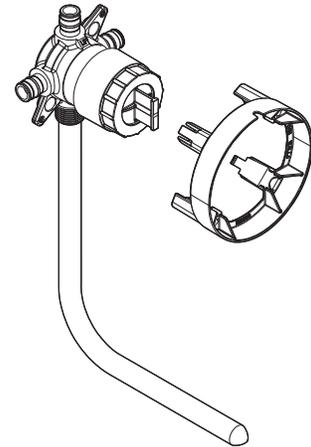


**M-CORE™**  
**4 Port Rough-In Valve With**  
**Pre-Fabricated Tub Outlet**

### Models:

U140X-PF  
U140XS-PF  
U140CX-PF  
U140CXS-PF

### Inlet Connection

PEX w/cc drop  
PEX w/cc drop and stops  
Cold Expansion PEX w/cc drop  
Cold Expansion PEX w/cc drop and stops

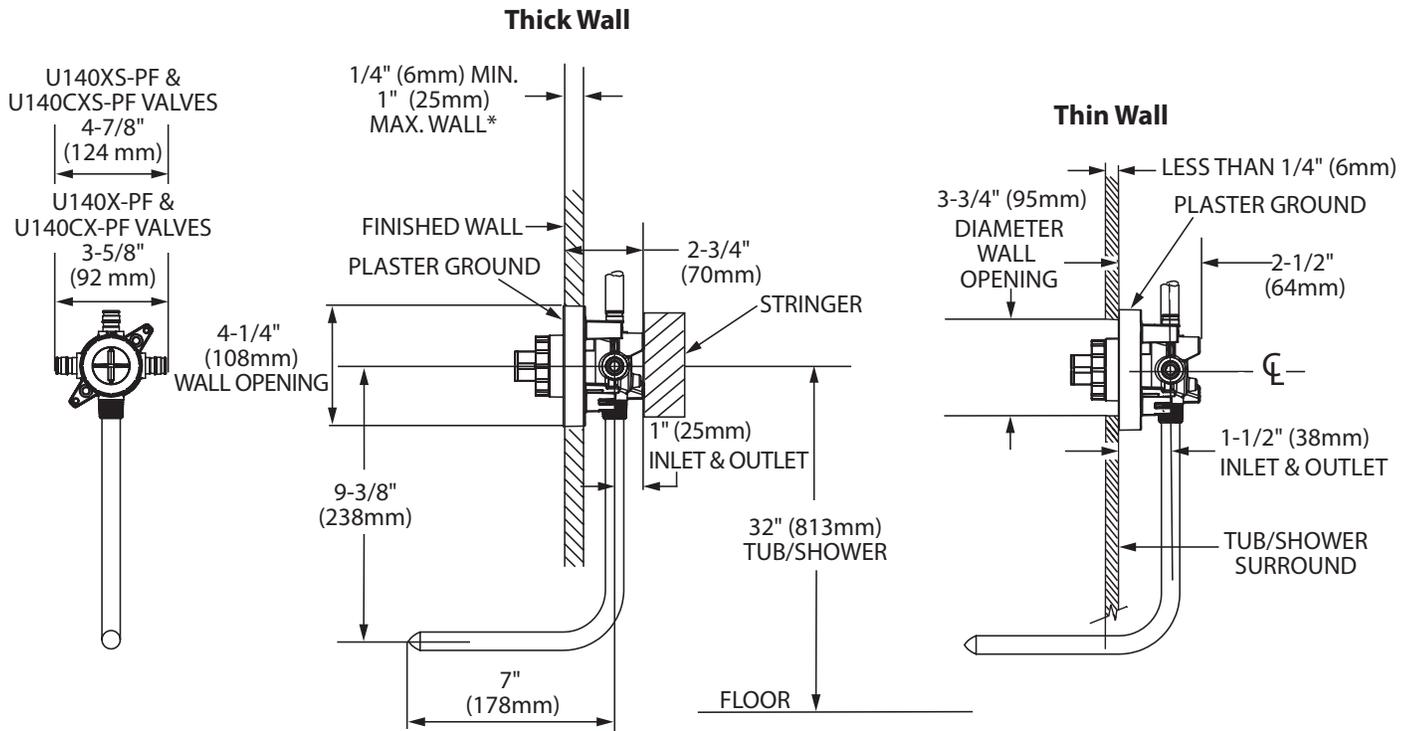

\* Walls thicker than 1" (25mm) require optional extension kit.

## CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

[www.moen.com](http://www.moen.com)