


1) With the Back and Seat on their sides, attach one side of the Back to the Seat using two A bolts.

2) Repeat on other side.

attach the Back to the Arm

using one A bolt.

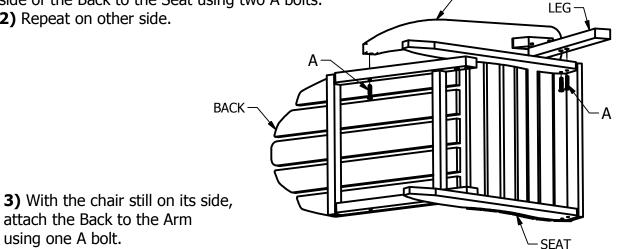

ARM

- **4)** Attach the Seat to the Leg using two A bolts.
- **5)** Flip chair onto its other side and repeat Steps 3 & 4.

HARDWARE

Α 1/4"-20 X 1-3/4"

x10

IMPORTANT!

DO NOT fully tighten the bolts until all bolts are started. Once all bolts are inserted, go back & tighten all the bolts.

Retain these instructions for future reference

INCLUDED TOOLS

