

Greek® 4' Bath K-1490-X



Features

- End drain.
- Integral lumbar support and armrests for comfort.
- Repose vinyl bath pillow for added comfort.
- 48" (1219 mm) x 32" (813 mm) x 23-3/8" (594 mm)

Material

Acrylic

Installation

Drop-in.

Recommended Accessories

K-1179 Vinyl Tiling-in Bead
K-1491 Bath/Whirlpool Pillow
K-1601 Bath/Whirlpool Footstop
K-24916 Wireless Music Kit
K-7213 27" Cable Bath Drain
K-7214 27" Cable Bath Drain
K-7265 Clearflo Bath Drain
K-164 Under-Mount Install Kit K-1490-X/1492-H2



Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 Greenguard UL 2818 - Gold

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	G9	Sandbar






KOHLER

K-1490-X

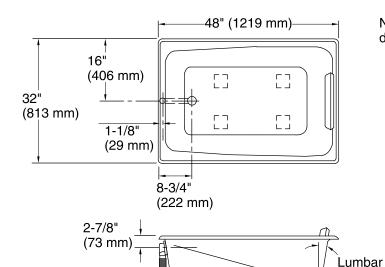

No change in measurement if connected with drain illustrated. (K-7265)



Technical Information

All product dimensions are nominal.

Installation: Drop-in Drain location: End

Basin area, bottom: 36" x 21" (914 mm x 533 mm)
Basin area, top: 42" x 26" (1067 mm x 660 mm)

Weight: 60 lbs (27.2 kg)

Minimum floor load: 61 lbs/ft² (297.8 kg/m²)
Water depth: 17-7/8" (454 mm)
Water capacity: 68 gal (257.4 L)

Cutout: Drop-in, 46-1/2" x 30-1/2" (1181 mm x

775 mm)

Notes

Angle 9°

¹3/4" (19 mm)

2-7/8"

2-5/8" (67 mm)

(73 mm)

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

