


### Submitted Model No.:

#### **Specific Features:**

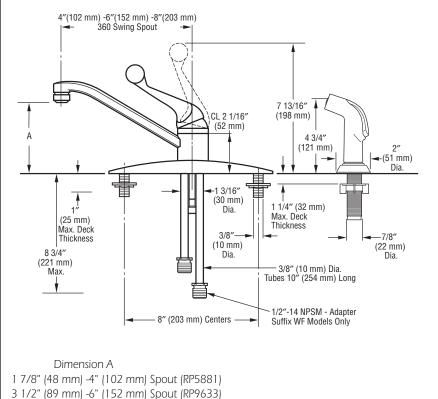

5" (127 mm) -8" (203 mm) Spout (Standard)

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability. DSP-K-100LF-WF Rev. B

- Single Handle Deck Mount
- 3 and 4 Hole Sink Applications

# STANDARD SPECIFICATIONS:

- Solid brass fabricated body.
- Standard 8" (203 mm) long spout swings 360°.
- Control handle shall return to neutral position when faucet is turned off.
- Lever handle. Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Model 400 series with spray attachement has antisiphon device as integral part of valve body.
- Model 100 and 400 series without dispenser can be field converted from 8" (203 mm) to 6" (152 mm) centers.
- 3/8" O.D. copper tube inlets 10" (854 mm) long.
- Vegetable sprayer hose with chrome sprayhead on model 400 series - 45" (1143 mm) long threaded hose.
- Models supplied with 1/2"-14 NPSM adapters.


## WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



### **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1
- Verified compliant with .25% weighted average Pb content regulations.



55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2013 Masco Corporation of Indiana