




M S International, Inc.

Premium Surfaces Since 1975

Ledger Panels: Charcoal Rust

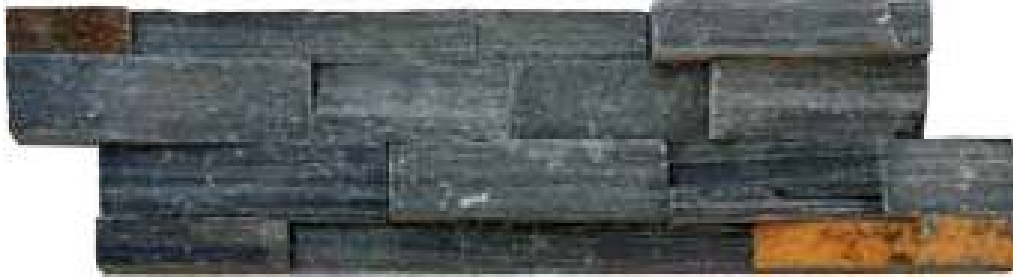

Technical Information

- Average Compressive Strength: Dry/4931 Psi

Adhesive

- *Exterior application:* a flexible latex based mortar system suitable for the stone is recommended.
- *Interior application:* a thin set mortar suitable for the stone is recommended.
- For light colored stones, a white mortar is recommended.



Sizes

- Flat panels: 6 x 24"
- Corner: 6 x 18 x 6"

Packaging

- Panels: 4 pcs/box; 120 pcs/crate
- L-shaped corner: 4 pcs/box; 80 pcs/crate

Thickness: 0.75-1.25"

Color: Charcoal gray, black, rust

Type: Slate

Application: Walls, barbeque areas, etc.

Substrates

Exterior/Interior

- Fully cured concrete (at least 28 days cured)
- Masonry brick
- Regular brick
- Cement mortars
- Cementitious backer units

Interior only

- Gypsum plaster (max 10' high)
- Gypsum wallboard (max 10' high)
- Exterior grade plywood (max 10' high)
- Cementitious backer units



GENUINE STONE

