VILAMONTE

FREESTANDING TUB FILLER

SKU: 948665



CONTENTS

TUB FILLER PAGE 2 VALVE PAGE 3

FEATURES

Spout max. flow rate: 8 gpm (30 L/min) @ 60 psi.

Hand shower max. flow rate: 1.8 gpm (6.8 L/min) @ 80 psi.

Single function hand shower (full spray).

Integral diverter to hand shower.

Handshower includes factory installed backflow prevention check valve.

Optional rough-in valve includes stops.

Underfloor access is required for proper installation.

Installation on an existing concrete slab will require cutting and concrete removal.

SIGNATURE HARDWARE Lifetime Warranty

See website for detailed warranty information.


REVISED 02/14/2020



VILAMONTE

FREESTANDING TUB FILLER

SKU: 948665

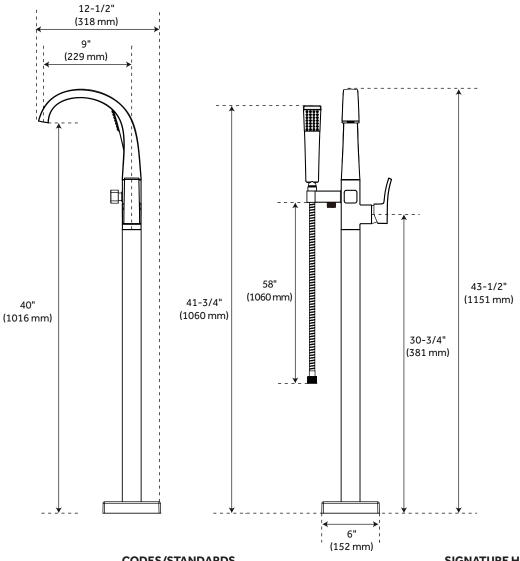

FEATURES

Installation Type: Freestanding Faucet Centers: Single-Hole Handle Type: Lever

Features: Hand Shower Included Tub Faucet Material: Brass

Width: 12-1/2" Height: 43-1/2"

Height To Spout: 40"

Height to Control Valve: 30-3/4"

Spout Reach: 9" Drain Included: No

Base Plate Length: 6" Base Plate Width: 6"

Ceramic Disc Cartridges: Yes Hand Shower Hose Length: 58"

Hand Shower Material: Zinc

CODES/STANDARDS

cUPC

ASME A112.18.1/CSA B125.1

ASME A112.18.3

ICC/ANSI A117.1 (when installed according to ADA Standards)

WaterSense

CEC Listed

Massachusetts Accepted



SIGNATURE HARDWARE LIFETIME WARRANTY

See website for warranty information



CODE: SHVLFS2000GBN/SHVLFS2000GCP SHVLFS2000GORB/SHVLFS2000GPN


All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.



FREESTANDING

TUB FAUCET ROUGH-IN VALVE

SKU: 448006

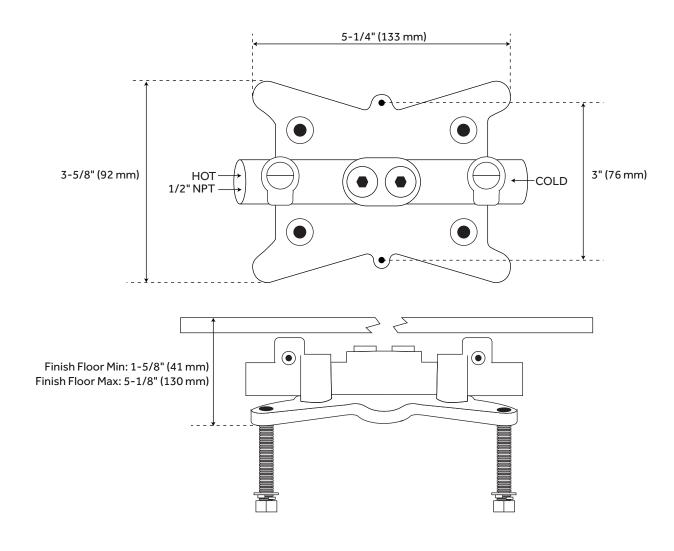

FEATURES

Material: Brass Length: 5-1/4" Width: 3-5/8" Height: 5-1/8" NPT Connection: 1/2"

CODES/STANDARDS

cUPC ASME A112.18.1/CSA B125.1 Massachusetts Accepted

SIGNATURE HARDWARE LIFETIME WARRANTY

See website for warranty information



PAGE 3 CODE: SHFSR2000WS

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

