
# Assembly Instructions



#### **General Assembly Guidelines**

- I. Ensure that all parts and hardware are available before beginning assembly.
- II. Follow each step carefully to ensure the proper assembly of this product.
- III. Two people are recommended for ease in the assembly of this product.
- IV. The three main types of hardware used to assemble this product are: wood dowels, screws and bolts.
- V. The provided glue is to secure wood dowels in place. When first inserting dowels, locate the appropriate hole for the dowel, place a small amount of glue in the hole and insert the dowel. Wipe away excess glue immediately.




In future assembly steps when dowels are necessary to attach assembly parts together, place a small amount of glue on the end of the dowel before attaching parts together. Wipe away excess glue immediately.



VI. A Phillips head screwdriver is required for the assembly of this product.





VII. Power tools should not be used to assemble this product.



VIII. Drill may be needed for securing product to wall.

#### Parts List

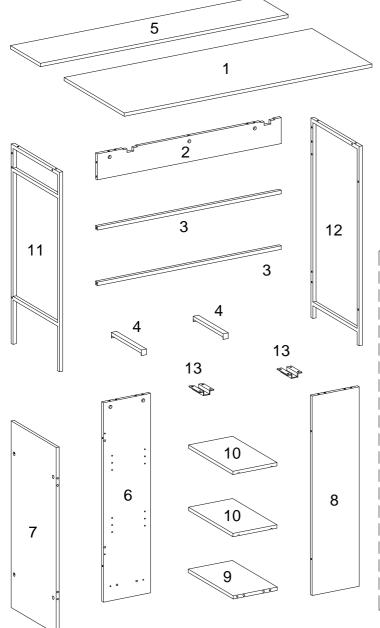

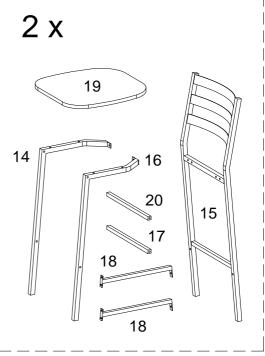

#### Hardware List


Α		Ø8x30mm	Wooden dowel	14	pcs
В		Ø6x35mm	Cam bolt	15	pcs
С		Ø15x11mm	Cam lock	15	pcs
D		Ø30mm	Sticker	15	pcs
Е			Hinge	3	pcs
F	<======( <del>\</del>	Ø4x12mm	Screw	12	pcs
G		Ø6x50mm	Bolt	8	pcs
Н			Shelf support pin	8	pcs
J			Rubber Pad	2	pcs
K		Ø1/4"x12mm	Bolt	24	pcs
L		Ø1/4"x30mm	Bolt	20	pcs
М		Ø1/4"x25mm	Flat head Bolt	4	pcs
N		M 4	Hex key	1	рс
Р			Glue tube	1	рс
Q		Ø1/4"x25mm	Bolt	4	pcs




Philips head screwdriver required for assembly (not included)


The hardware quantities listed above are required for proper assembly.

Some extra hardware may also have been included.

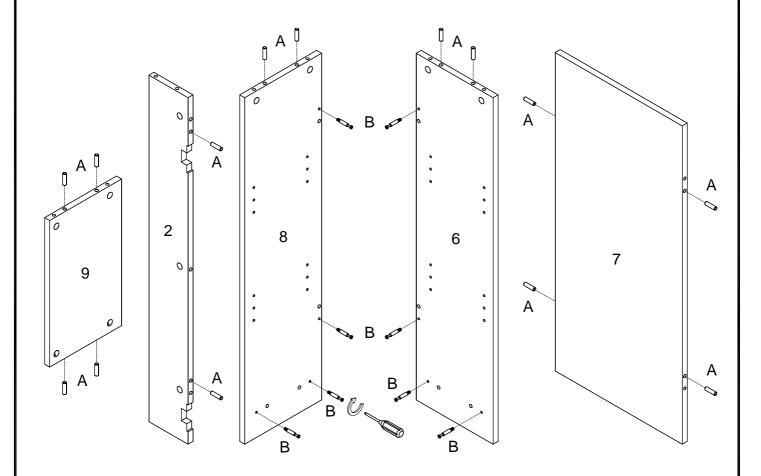



Insert wooden dowel (A) into parts (2,6,7,8,9), then using cam bolt (B) secure parts (6,8) with Philips head screwdriver as per diagram.



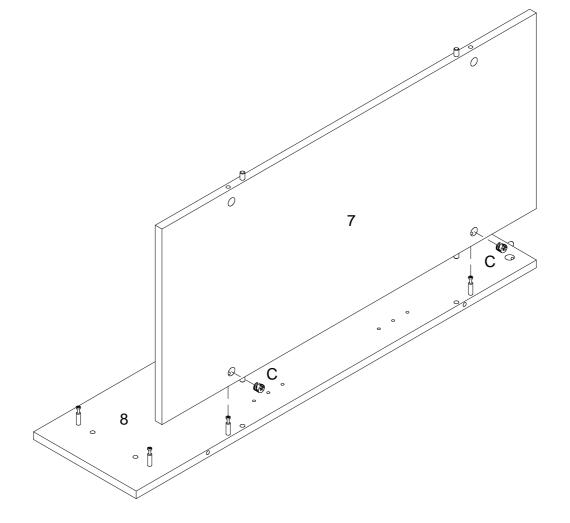


Using cam lock (C) secure part (7) into part (8) with Philips head screwdriver.




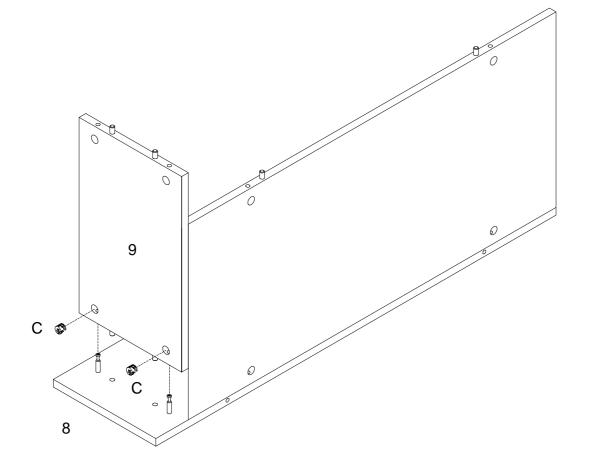


Using cam lock (C) secure part (9) into part (8) with Philips head screwdriver.






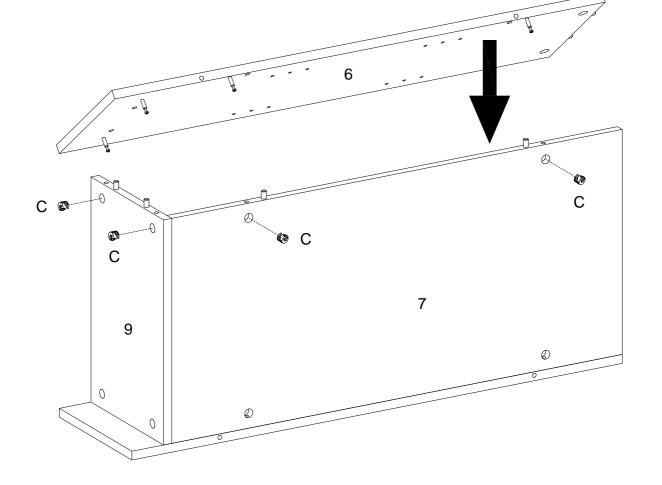


Using cam lock (C) secure part (6) into parts (7,9) with Philips head screwdriver.

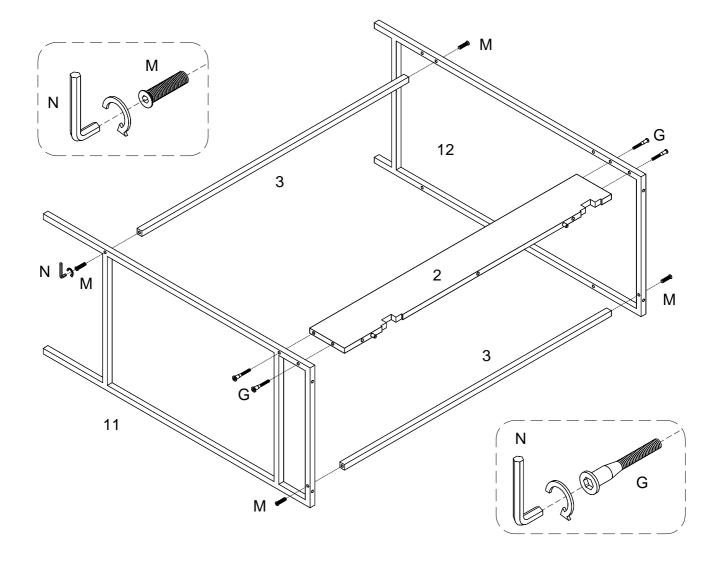


Using bolt (M) attach parts (3) into parts (11,12), use bolt (G) attach part (2) into parts (11,12) with hex key (N) as per diagram.

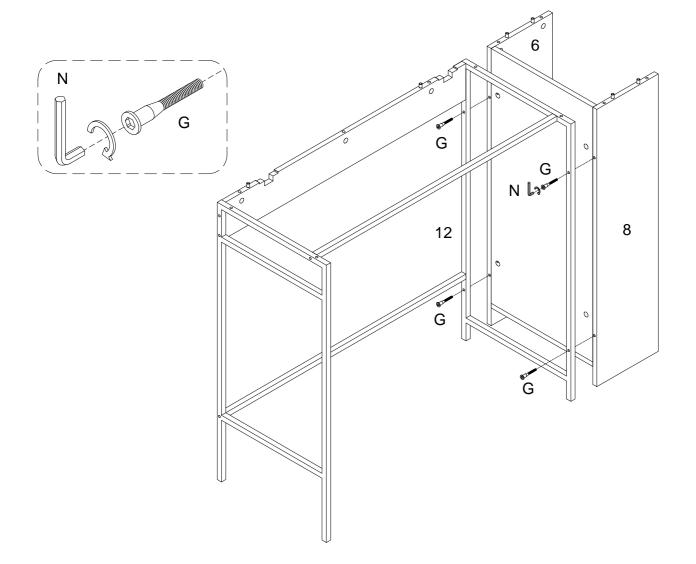


Using bolt (G) attach part (12) into parts (6,8) with hex key (N).

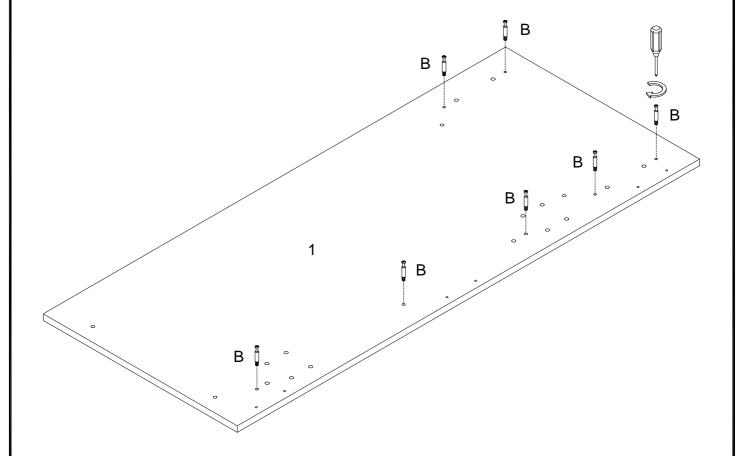


Using cam bolt (B) secure part (1) with Philips head screwdriver.

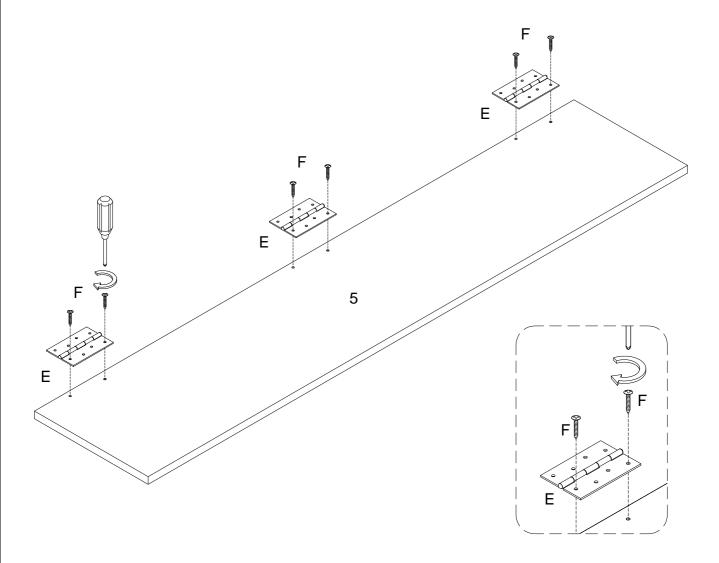


Using screw (F) attach hinge (E) into part (5) with Philips head screwdriver as per diagram .

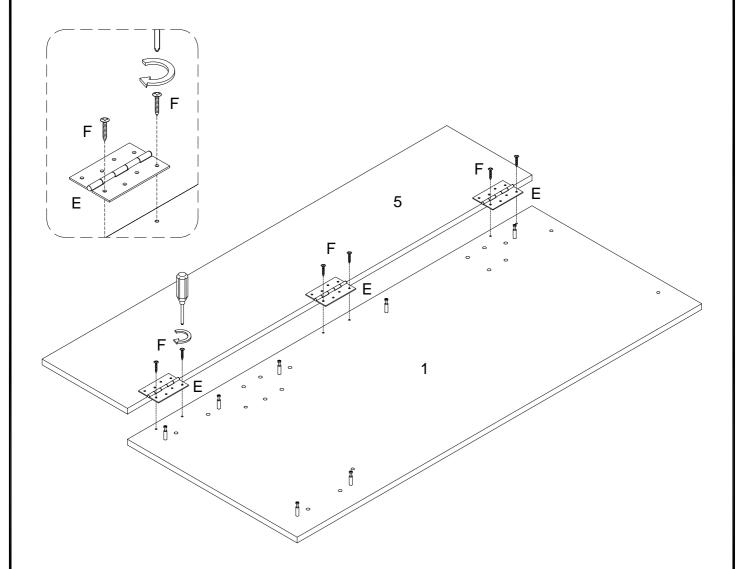


Using screw (F) attach hinge (E) into part (1) with Philips head screwdriver as per diagram .

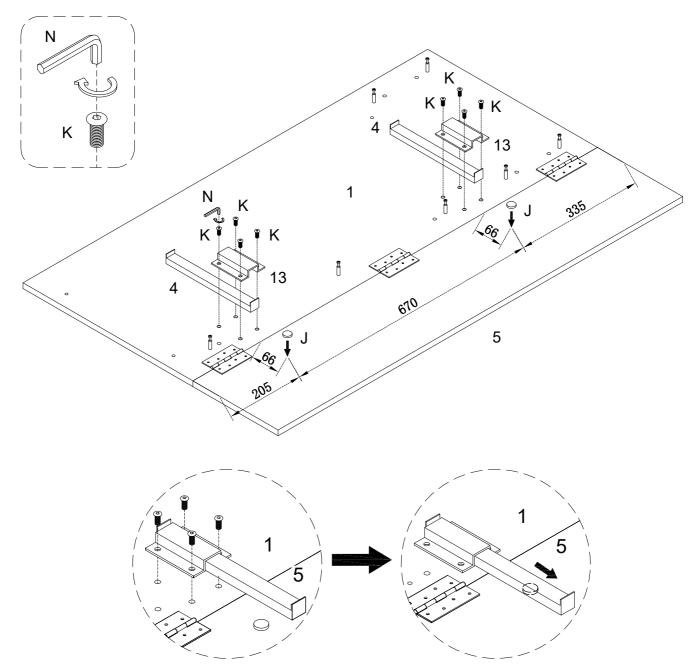


Attach rubber pad (J) on part (5) as the diagram .please keep the rubber (J) and part (4) in the same line .In this way when you pull out the leaf support (4).it could be on the rubber pad (J). Using part (13) cover part (4).then use bolt (K) secure part (13) to part (1) with hex key (N) as per diagram.

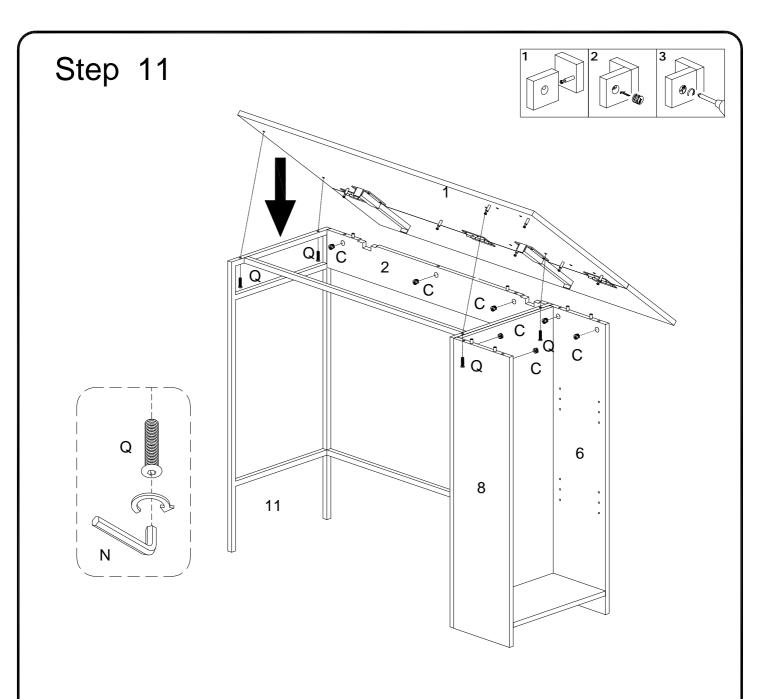


Using bolt (Q) secure part (1) into part (11,12) with hex key (N), then using cam lock (C) secure part (1) into parts (2,6,8) with Philips head screwdriver as per diagram.

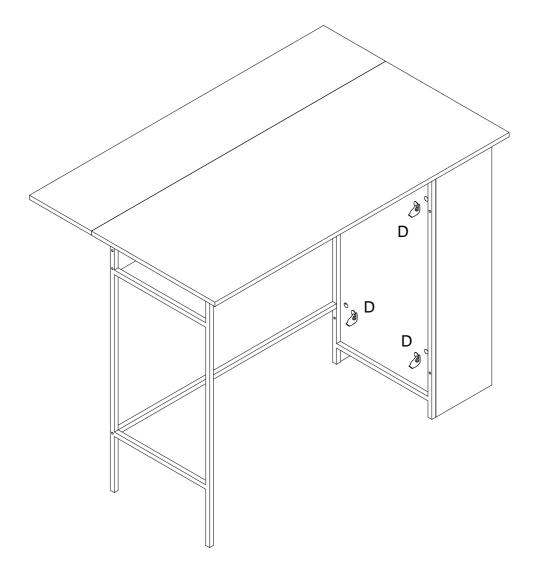


Place sticker (D) cover the holes as per diagram.

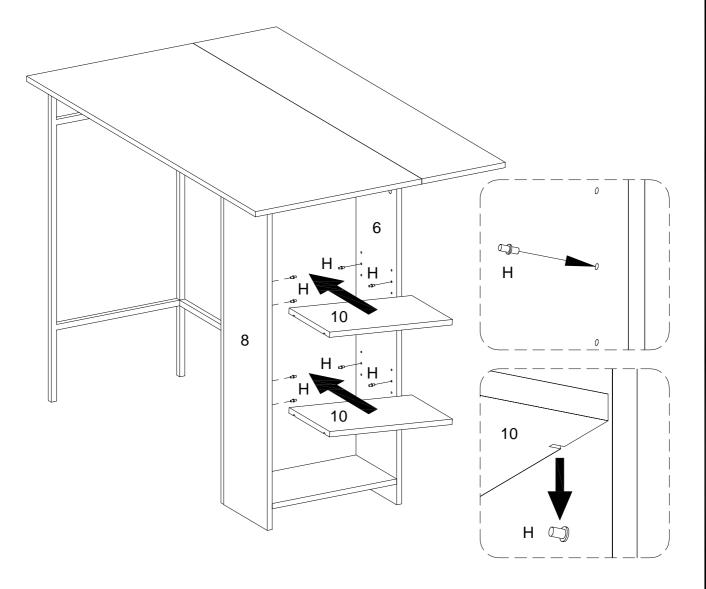

Insert shelf support pins (H) into parts (6,8) ,make sure you place the four support pins (H) in the same level so the shelf is not tilted .Then put part (10) into parts (6,8) as per diagram, tilt and rest the adjustable shelves (10) onto the shelf support pins (H).

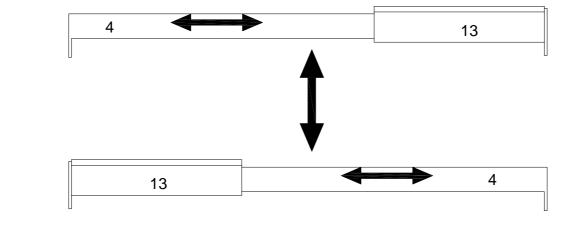

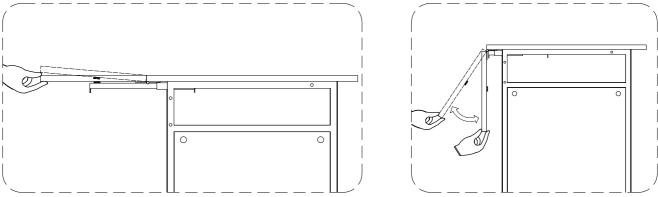


Note: If you want to open the leaf ,please lift up the leaf as shown.

Hold it .then fully pull out the two leaf support and keep them on the rubber pad


If you want to close the leaf .please up the leaf slightly and hold it.push the two leaf supports off .Then lay down the leaf slowly .



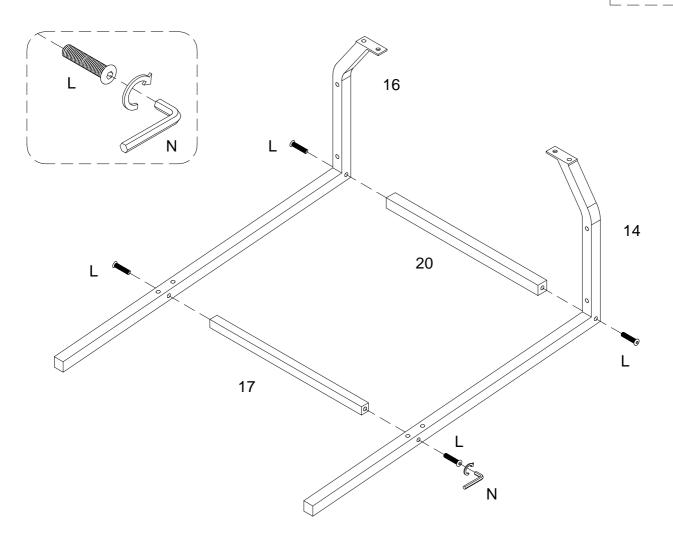

Using bolt (L) attach parts (14,16) to part (17,20) with hex key (N) as per diagram . Do not fully tighten all the bolts .




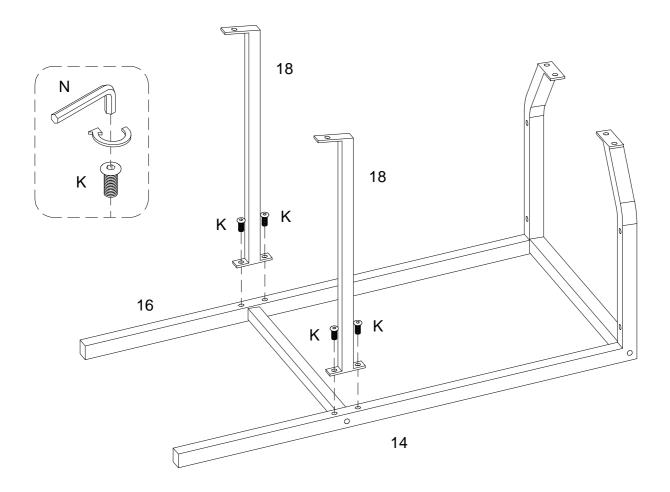

Using bolt (K) attach part (18) to parts (14,16) with hex key (N) as per diagram . Do not fully tighten all the bolts .

# Step 17 14 16 K 18 18 15

Using bolt (K) attach parts (14,16,18) to part (15) with hex key (N) as per diagram .

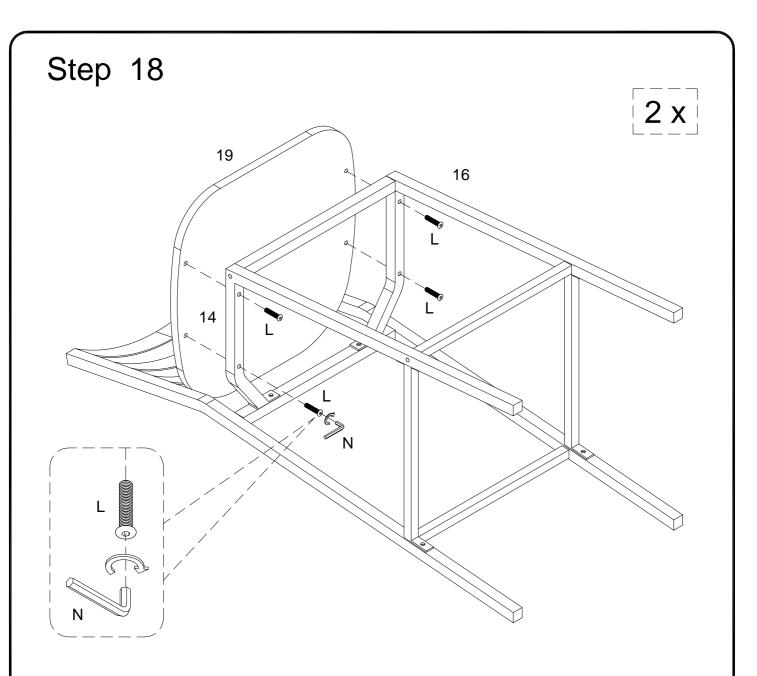

Using bolt (L) attach parts (14,16) to part (19) with hex key (N) as per diagram . And fully tighten all the bolts.



Final Assembly