

### Features

- Acrylic
- Bask™ heated lumbar support with three temperature settings
- Textured bottom surface
- Integral tile flange [K-1259-LW and K-1259-RW]
- Drop-in installation [K-1259-W1] or 3-wall alcove installation [K-1259-LW and K-1259-RW]
- Reversible drain [K-1259-W1] or left/right drain [K-1259-LW and K-1259-RW]
- 72" (1829 mm) x 36" (914 mm) x 20" (508 mm)

### Codes/Standards Applicable


Specified model meets or exceeds the following:

- ASTM E162
- ASTM E662
- UL 1795
- CSA B45.5/IAPMO Z124

### 6' BATH WITH BASK™ HEATED SURFACE

## K-1259-W1

ALSO K-1259-LW, K-1259-RW

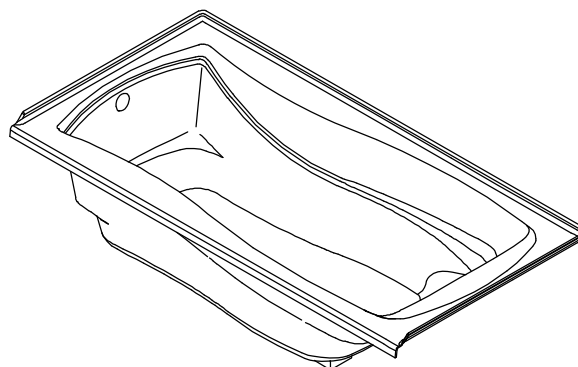

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-1259-LW	6' Bath with Bask heated surface – left drain (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1259-RW	6' Bath with Bask heated surface – right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1259-W1	6' Drop-in bath with Bask heated surface	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

#### Recommended Accessories

K-7166-AF	Adjustable pop-up drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
-----------	-------------------------	-----------------------------	-----------------------------	-------------------------------------

#### Optional Accessories

K-1283	Removable apron	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1491	Removable pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

### Product Specification

The acrylic bath shall be 72" (1829 mm) in length, 36" (914 mm) in width, and 20" (508 mm) in height. Bath shall feature Bask heated lumbar support with three temperature settings. Bath shall have textured bottom surface. Bath shall have integral tile flange [K-1259-LW and K-1259-RW]. Bath shall be for drop-in installation [K-1259-W1] or 3-wall alcove installation [K-1259-LW and K-1259-RW]. Bath shall have reversible drain [K-1259-W1] or left/right drain [K-1259-LW and K-1259-RW]. Bath shall be Kohler Model K-1259-\_\_\_\_-\_\_\_\_.

# MARIPOSA®

## Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	50" (1270 mm) x 24" (610 mm)
Basin area, top	65" (1651 mm) x 27" (686 mm)
Weight	77 lbs (35 kg)
To overflow:	
Water depth	14" (356 mm)
Capacity	72 gal (272.5 L)
* Approximate measurements for comparison only.	

Heater:	W	V	HZ	A
	65	120	60	.5

## Installation Notes


Install this product according to the installation guide.

Floor support under the bath must provide for a minimum of 39.1 lbs/square foot (190.7 kg/square meter) loading.

If used, the optional apron must be installed before the finished floor and wall materials are installed.

Locate a GFCI-protected 120 V, 15 A, grounded electrical outlet within 24" (610 mm) of the bath junction box.

40" (1016 mm) cable is included.

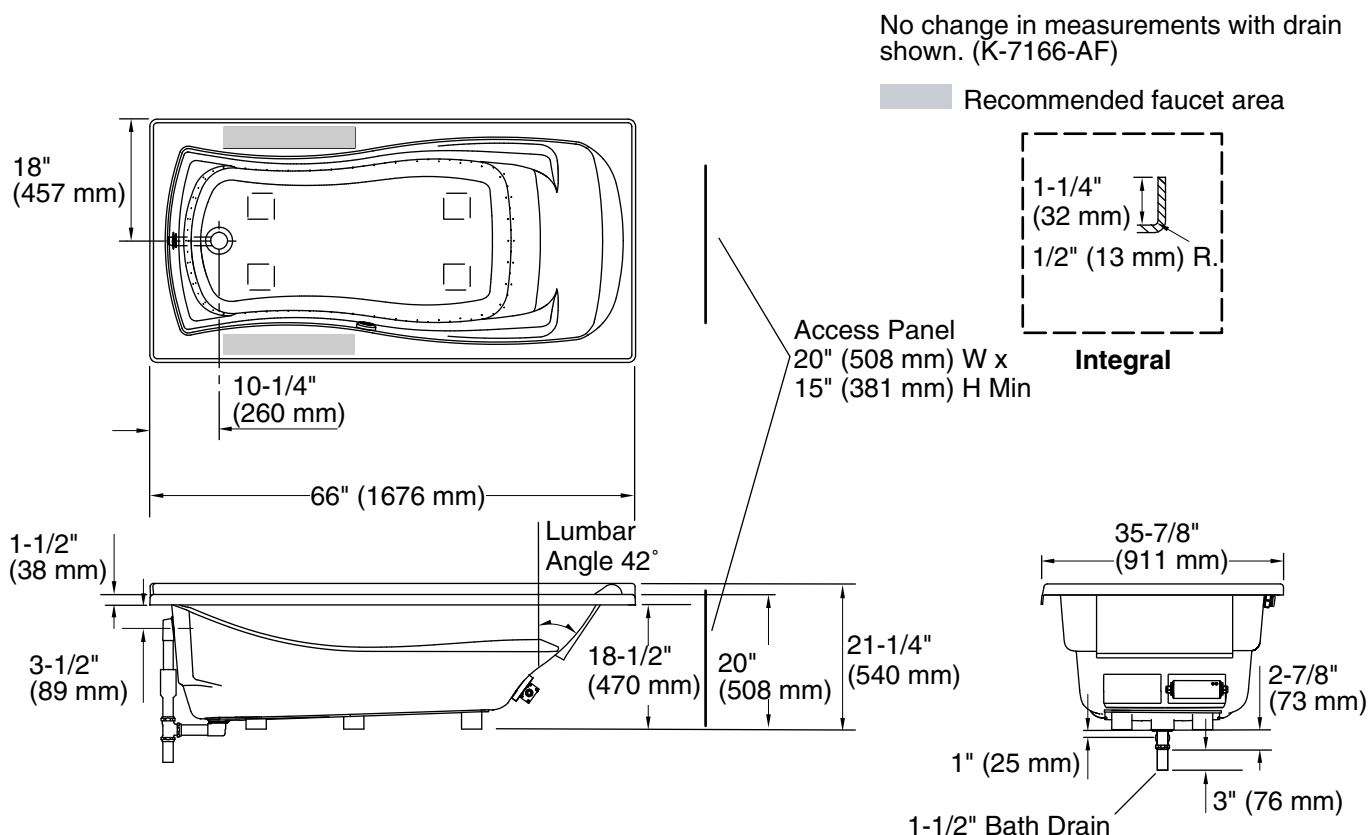

## Product Diagram

MARIPOSA® 6' BATH WITH BASK™ HEATED SURFACE

Page 2 of 2  
1201649-4-B

THE BOLD LOOK  
OF **KOHLER**®