


Features

- Acrylic
- Bask™ heated lumbar support with three temperature settings
- 5 fully adjustable color-matched hydro-massage jets
- Molded lumbar support and armrests for comfort
- Textured bottom surface
- Integral tile flange [K-1224-LW and K-1224-RW]
- Drop-in installation [K-1224-W1] or 3-wall alcove installation [K-1224-LW and K-1224-RW]
- Reversible drain [K-1224-W1] or left/right drain [K-1224-LW and K-1224-RW]
- 66" (1676 mm) x 35-7/8" (911 mm) x 20" (508 mm) - Drop-in models
- 66" (1676 mm) x 35-7/8" (911 mm) x 21-1/4" (540 mm) - Integral flange models

5.5' BATH WHIRLPOOL WITH BASK™ **K-1224-W1** ALSO K-1224-LW, K-1224-RW

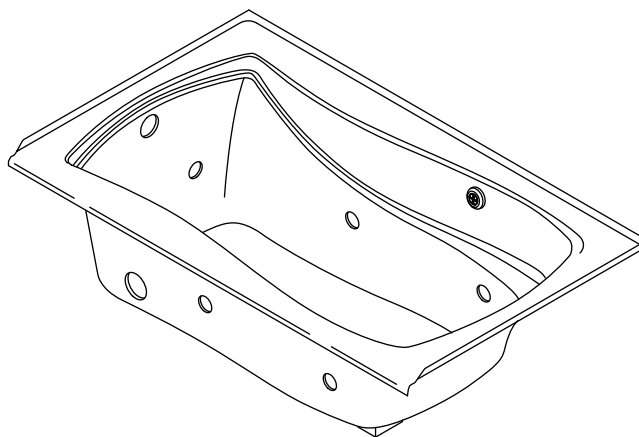

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASTM E162
- ASTM E662
- UL 1795
- CSA B45.5/IAPMO Z124
- ASME A112.19.7/CSA B45.10

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes
- CP: Polished Chrome
- PB: Vibrant® Polished Brass

Specified Model

Model	Description	Colors/Finishes	
K-1224-W1	5.5' Bath whirlpool with Bask – drop-in	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1224-LW	5.5' Bath whirlpool with integral flange and Bask – 3-wall alcove, left-drain (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1224-RW	5.5' Bath whirlpool with integral flange and Bask – 3-wall alcove, right-drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Recommended Accessories

K-7161-AF	Adjustable pop-up drain with tailpiece	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
-----------	--	-----------------------------	-----------------------------	-------------------------------------

Optional Accessories

K-1234	Removable apron	<input type="checkbox"/> 0		<input type="checkbox"/> Other_____
K-9695	Metal finish 5 jet trim kit		<input type="checkbox"/> CP <input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Product Specification

The acrylic bath whirlpool shall be 60" (1524 mm) in length, 35-7/8" (911 mm) in width, and 20" (508 mm) in height (drop-in models), or 60" (1524 mm) in length, 35-7/8" (911 mm) in width, and 21-1/4" (540 mm) in height (integral flange models). Bath shall feature Bask heated lumbar support with three temperature settings. Product shall have 5 fully adjustable color-matched hydro-massage jets. Product shall feature molded lumbar support and armrests for comfort and textured bottom surface. Product shall have integral tile flange [K-1224-LW and K-1224-RW]. Product shall be for drop-in installation [K-1224-W1] or 3-wall alcove installation [K-1224-LW and K-1224-RW]. Product shall have reversible drain [K-1224-W1] or left/right drain [K-1224-LW and K-1224-RW]. Bath whirlpool shall be Kohler Model K-1224-____-____.

MARIPOSA®

Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	48" (1219 mm) x 24" (610 mm)
Basin area, top	59" (1499 mm) x 30" (762 mm)
Weight	116 lbs (52.6 kg)
To overflow:	
Water depth	14" (356 mm)
Capacity	67 gal (253.6 L)
* Approximate measurements for comparison only.	

Drop-in cut-out	64" (1626 mm) x 34" (864 mm)
-----------------	------------------------------

	V	Hz	A
1-speed pump	120	60	7.5
Heated surface	120	60	1.1

Required Electrical Service

Dedicated circuit required, protected with a Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/Control/Heated surface	120 V, 15 A, 60 Hz

Installation Notes


Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 48 lbs/square foot (232 kg/square meter).

If installing a rim-mount faucet, make sure there is no interference with the drain overflow and circulating system before drilling any holes. If installing a spout on the faucet deck, consult local and national codes for minimum air gap requirements.

The apron must be installed before the finished floor and wall materials are installed.

Locate a GFCI-protected 120 V, 15A, grounded duplex electrical outlet within 24" (610 mm) of the pump.

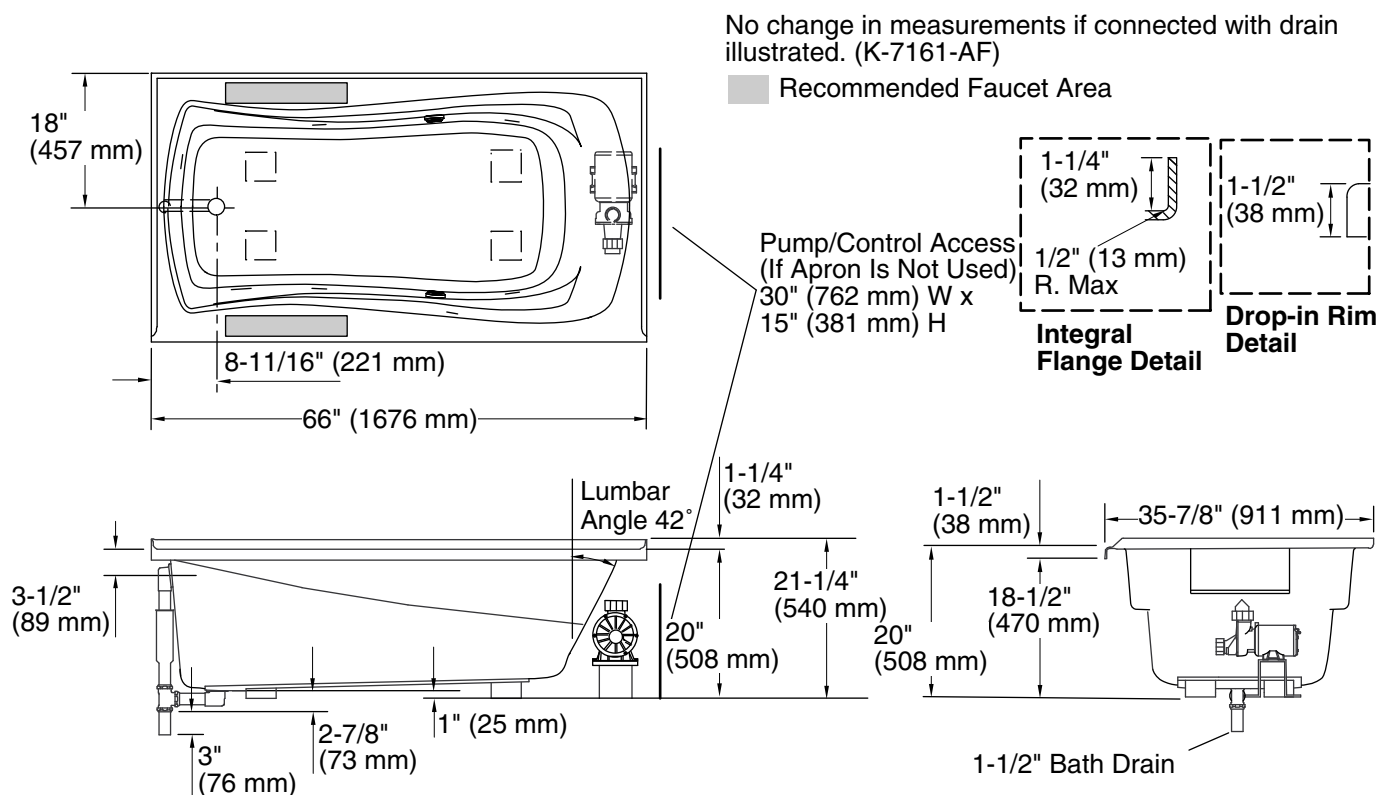

Product Diagram