



Installation Instructions for your D'Vontz Square or Round Bar and Prep Copper Sink

Items needed for Installation:

- A quality 100% clear silicon sealer.
- Sink drain for appropriate drain diameter.
- Soft cotton rag.
- Pencil
- Tape Measure

Directions:

NOTE: During the installation of this product, the only sealant or adhesive that is Manufacturer Approved is a 100% Silicone based product. Failure to use Kitchen and Bath 100% Silicone based products will VOID ALL manufacturer warranties and manufacturer finish warranties. Specifically, the use of Plumbers Putty is EXPRESSLY PROHIBITED and will VOID ALL manufacturer warranties and manufacturer finish warranties.

Drop In Installation:

- Determine location on countertop for sink. Turn sink upside down and place on countertop. Lightly trace the outside edge of your sink with a pencil. Remove sink and scribe line with pencil 1" inside outside line. See Fig. A. Cut countertop to this dimension. Since these sinks are manufactured by hand, we are unable to provide a template due to variations that occur in size.

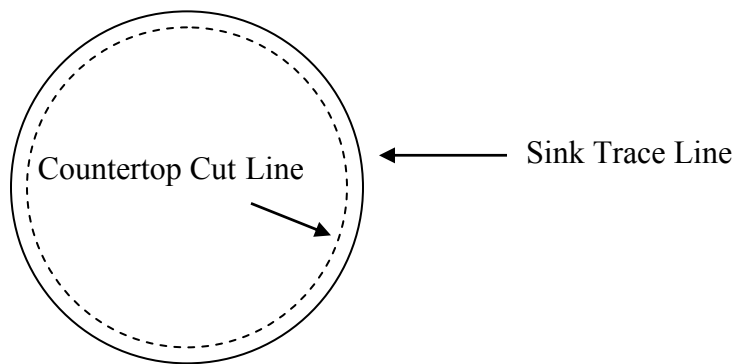


Fig. A

- Once countertop hole is cut, set sink inside hole and center. Ensure sink flange sits flat on top countertop.
- Before setting sink in countertop, prepare and attach drain to sink. Use silicone sealer under drain flange. After tightening tailpiece remove excess sealer.
- Run a 1/4" bead of silicon sealant inside of pencil line. Carefully set sink into countertop hole and sealant. Once positioned, carefully remove excess sealant from the outside rim of sink with a soft cotton rag while holding downward pressure on sink.
- Sink must set a minimum of 12 hours for sealer to dry before putting any movement or pressure on sink.

Under Mount Installation for Flat Edged Sink:

- Measure inside diameter of sink. Subtract one inch from this dimension to achieve countertop opening.
- Center sink on opening under countertop and trace pencil line around sink. Remove sink and apply a bead of silicone adhesive or other suitable adhesive to the flat mating edge of sink.
- Position sink under the countertop using your pencil mark as a guide and press upward seating sink against the counter. Place some type of support under sink until adhesive cures. Check for any excess sealer on inside of sink and remove immediately with a soft cloth.

Care and Maintenance:

Caring for our copper bowls is surprisingly easy. Rinsing your sink with clean water and drying with a soft cloth after each use will help keep your sink looking new. For cleaning use a liquid dish soap and water with a non-abrasive sponge. Never use abrasive cleaners. Most copper sinks are considered a "live" finish, meaning the patina (finish) **will** change over time. If you ordered the Dark Smoke finish, this patina will continue to darken over time as you use your sink giving an "Old World" look. **Do not use copper cleaners, abrasive materials or harsh chemicals on this sink as this will remove the patina.** If a chemical lightens the finish, don't worry, time will return the darker patina. For maintaining the Shiny Copper finish, copper cleaners or lemon juice will restore it to its original luster. For added protection, paste waxes such as Flitz Furniture and Faucet Wax or any quality automotive wax will help maintain the beauty of your sink as well as help keep it clean.

Any questions with the installation, please call us at (877) 322-3600. We will be happy to assist you.