









# ASSEMBLY INSTRUCTIONS


Thank you for purchasing this quality product . Be sure to check all packaging material carefully for small parts that may have come loose inside the carton during shipment .

"Hardware is attached underneath the seat bottom"


## Components List :

| NO | DESCRIPTION             | SKETCH   | QTY |
|----|-------------------------|--|-----|
| A  | Back Frame              |   | 1pc |
| B  | Seat Frame with Cushion |   | 1pc |
| C  | Front Leg (Left)        |   | 1pc |
| D  | Front Leg (Right)       |   | 1pc |
| E  | Side Stretcher (Left)   |   | 1pc |
| F  | Side Stretcher (Right)  |   | 1pc |
| G  | Center Stretcher        |   | 1pc |
| H  | Velcro                  |  | 1pc |



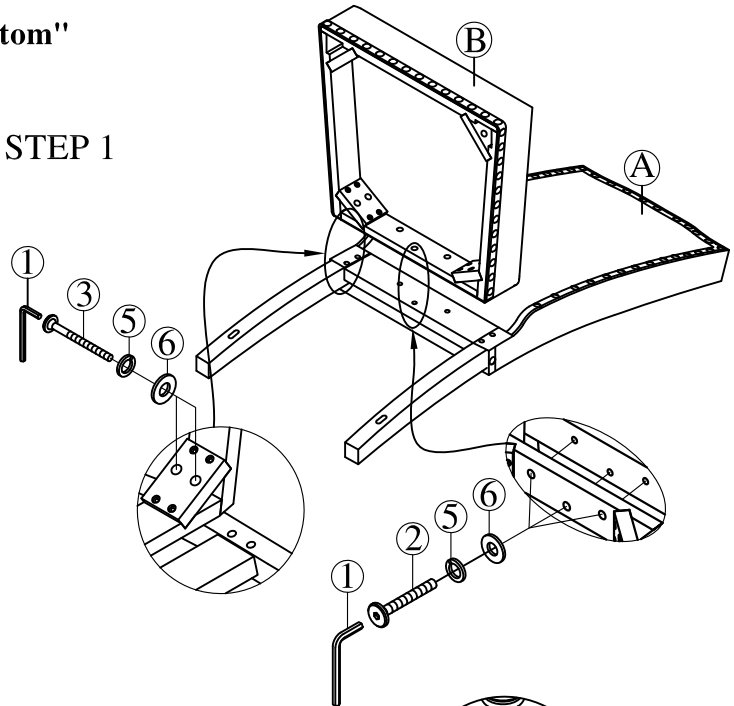

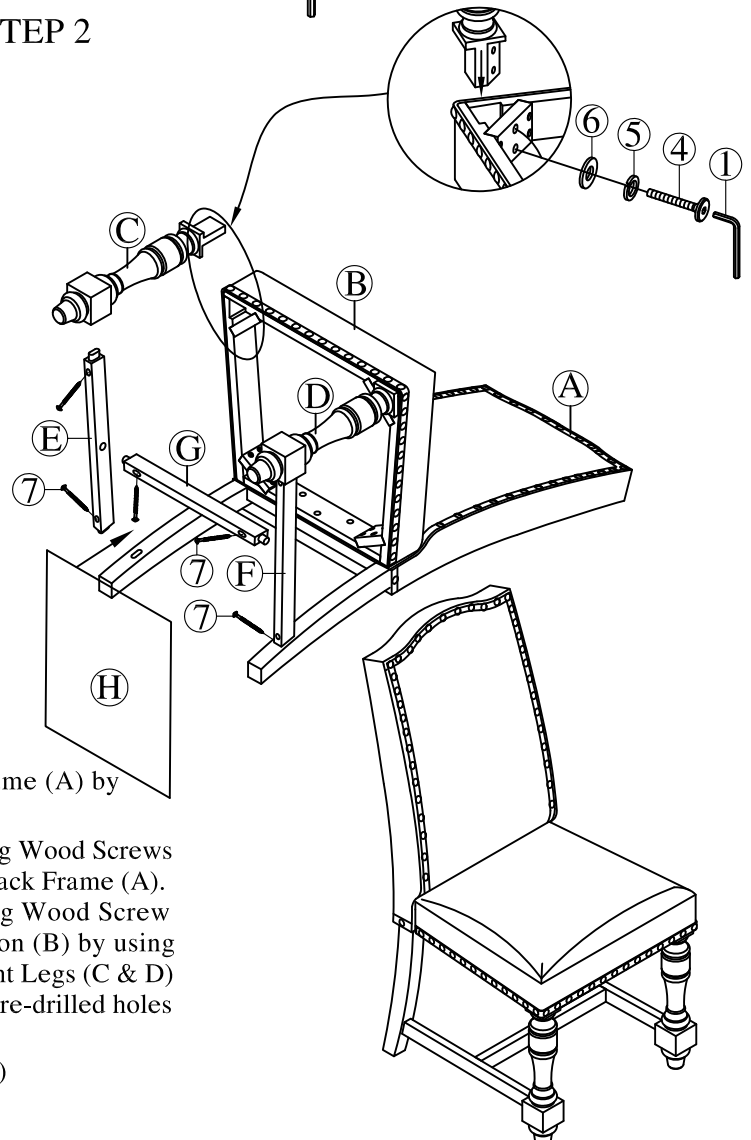


### STEP 1



### STEP 2



## Hardware List :

| NO | DESCRIPTION   | SIZE        | SKETCH  | QTY   |
|----|---------------|-------------|---|-------|
| 1  | Allen Key     | 58x23x4 mm  |  | 1pc   |
| 2  | Short Bolt    | 1/4" x38 mm |  | 3pcs  |
| 3  | Long Bolt     | 1/4" x85 mm |  | 4pcs  |
| 4  | Middle Bolt   | 1/4" x45 mm |  | 4pcs  |
| 5  | Spring Washer | 5/16" x Ø12 |  | 11pcs |
| 6  | Flat Washer   | 5/16" x Ø19 |  | 11pcs |
| 7  | Wood Screw    | Ø8 x 50 mm  |  | 6pcs  |

#### Reminders

1. Use only the hardware supplied.
2. Once the chair is finished, level and tighten all the bolts.
3. Do not over-tighten bolts.
4. This item may require periodic tightening.

#### NOTE :

1. Hardware pack is located underneath the Seat Frame with Cushion(B).
2. Two or more people are needed for assembly. Please keep all hardware parts out of the reach of children.

**Step1:** Attach the Seat Frame with Cushion (B) to Back Frame (A) by using Flat Washer (6), Spring Washer (5) and Bolt (2&3).

**Step2:** Attach Side Stretcher (E & F) to Back Frame (A) using Wood Screws (7) through pre-drilled holes of Side Stretcher (E & F) and Back Frame (A). Assemble Center Stretcher (G) to Side Stretcher (E & F) using Wood Screw (7). Attach the Front Leg (C & D) to Seat Frame with Cushion (B) by using Flat Washers (6), Spring Washers (5) and Bolt (4). Attach Front Legs (C & D) to the Side Stretcher (E&F) using Wood Screws (7) through pre-drilled holes on the Side Stretcher (E&F).

**Step3:** Attach the Velcro (H) to Seat Frame with Cushion(B)

Assembly is now complete  
Thank you for choosing this product.