
Assembly Instructions

General Assembly Guidelines


- I. Ensure that all parts and hardware are available before beginning assembly.
- II. Follow each step carefully to ensure the proper assembly of this product.
- III. Two people are recommended for ease in the assembly of this product.
- IV. The three main types of hardware used to assemble this product are: wood dowels, screws and bolts.
- V. The provided glue is to secure wood dowels in place. When first inserting dowels, locate the appropriate hole for the dowel, place a small amount of glue in the hole and insert the dowel. Wipe away excess glue immediately.




In future assembly steps when dowels are necessary to attach assembly parts together, place a small amount of glue on the end of the dowel before attaching parts together. Wipe away excess glue immediately.




VI. A Phillips head screwdriver is required for the assembly of this product.




VII. Power tools should not be used to assemble this product.




VIII. Concealed hinges are three-way adjustable.




Horizontal by screw adjustment



In-and-Out by loosening the hinge-arm mounting screw or via cam adjustment



Vertical
Via slots in the mounting
plate or via cam adjustment

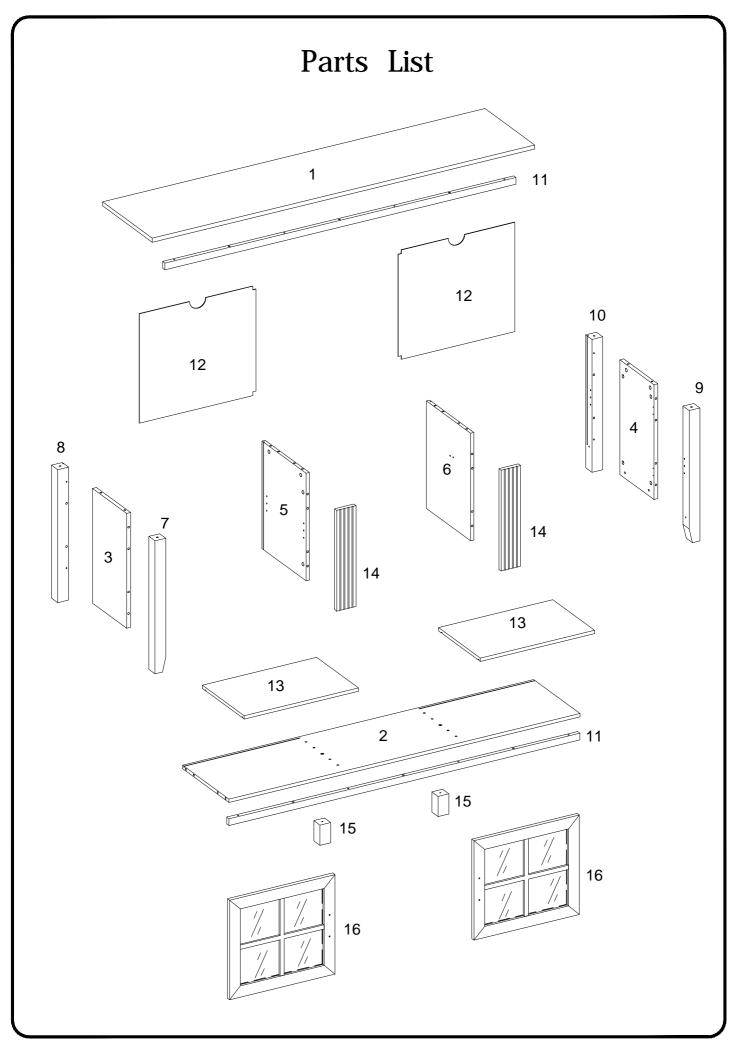


Hardware List

| Α | | Ø8x30mm | Wooden dowel | 34 | pcs |
|---|-----------------|------------|-------------------------------|----|-----|
| В | | Ø15x11mm | Cam lock | 24 | pcs |
| С | | Ø6x35mm | Cam bolt | 24 | pcs |
| D | | Ø30mm | Sticker | 24 | pcs |
| Е | | | Plastic wedge | 8 | pcs |
| F | | Ø3x17 | Flat-head screw | 8 | pcs |
| G | <i>amanaman</i> | Ø6x50mm | Bolt | 6 | pcs |
| Н | | Ø5x16mm | Shelf support pin | 8 | pcs |
| J | | M 4 | Hex key | 1 | рс |
| K | | 5/32x25mm | Bolt | 4 | pcs |
| L | | | Handle | 2 | pcs |
| M | | Ø4x32mm | Screw | 8 | pcs |
| N | | 90x50x20x2 | L shape bracket | 2 | pcs |
| Р | < | Ø4x12 | Screw | 4 | pcs |
| Q | | Ø35 | hinge | 4 | pcs |
| R | | Ø3.5x15 | Sorow | 16 | pcs |
| S | | | Screw | 1 | рс |
| | | | Glue tube | | |
| Т | | | Fireplace Insert (F18V66L) | 1 | рс |




Philips head screwdriver required for assembly (not included)


The hardware quantities listed above are required for proper assembly. Some extra hardware may also have been included.

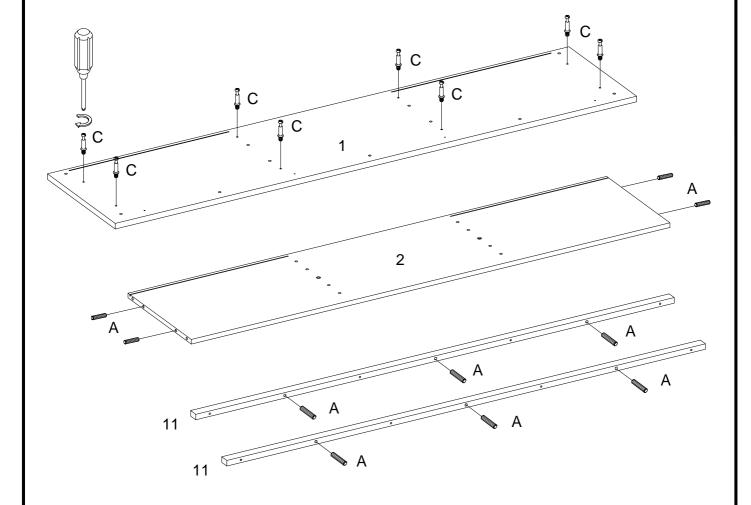

Insert Cam bolt (C) into part (1), insert wooden dowel into part (2,11),

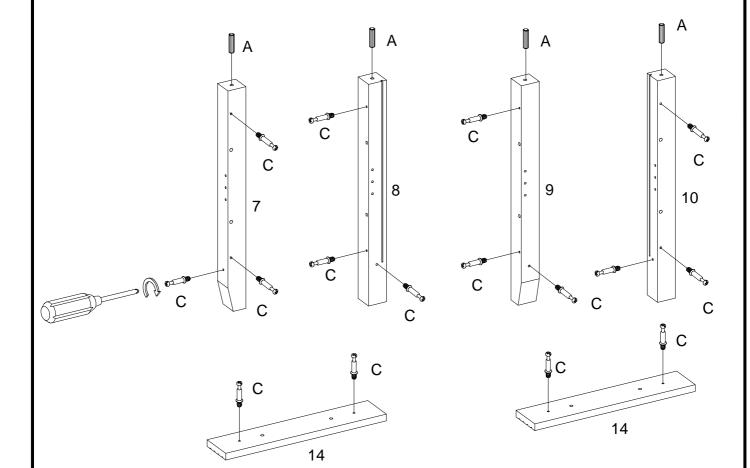



Insert wooden dowel (A) and secure cam bolt (C) with screwdriver into part (7,8,9,10). Attach cam bolt (C) into part (14) .

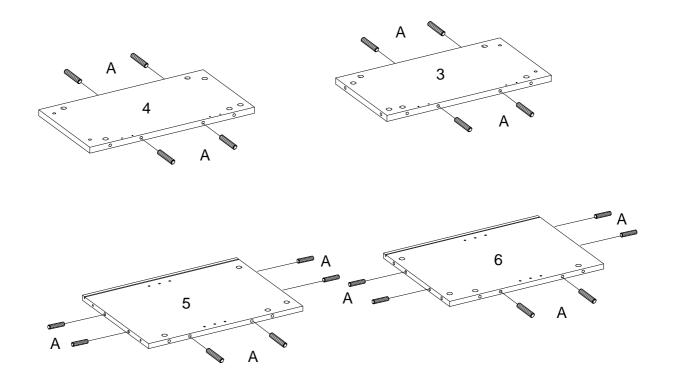

Insert wooden dowel (A) into parts (4,5,6,3)


Step 4




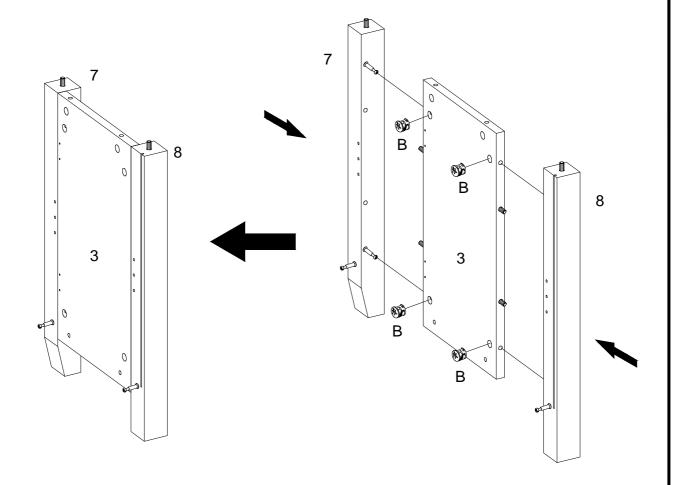


Attach part(7,3,8) by using cam lock (B)






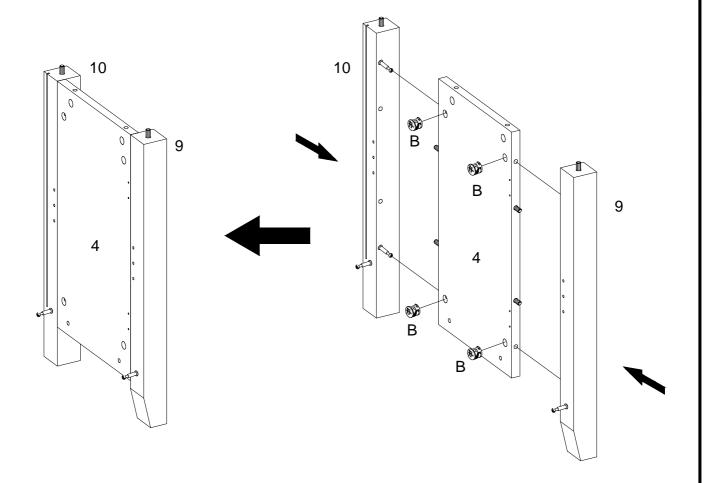


Attach part (10,4,9) by using cam bolts (B)

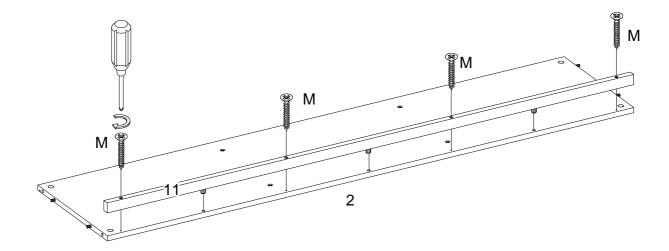


Secure panel 2 to part(11) by using screw (M) with screwdriver.

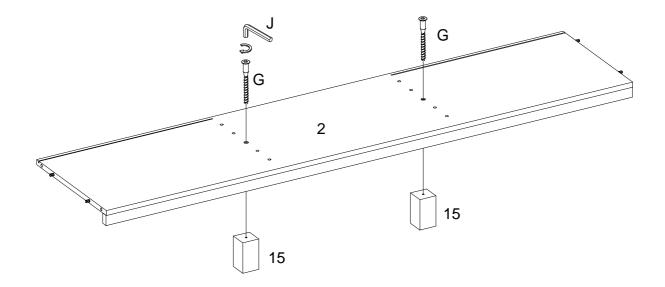


Attach part (15) to part (2) by using bolt (G) with hex key (J).




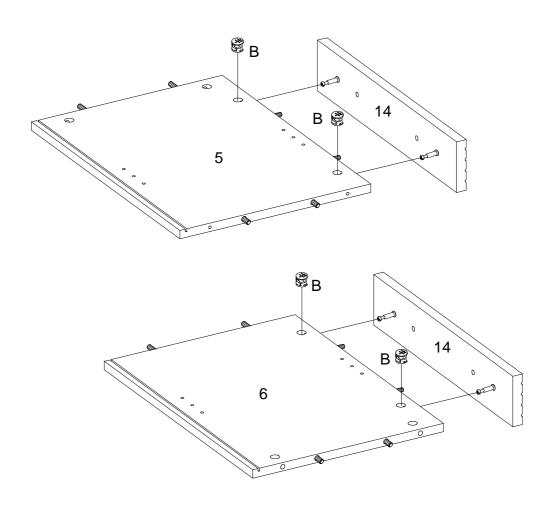


Insert Part(5,6) into part(14) by using cam lock(B) to secure it.

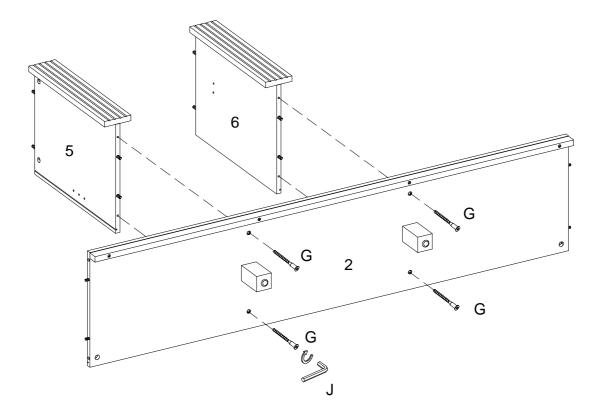


Attach part (2) to part (5,6) using bolt (G) with hex key (J).

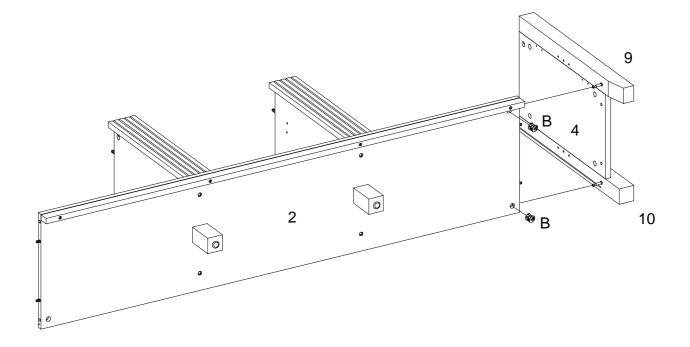


Attach part (9,10) into part (2) and secure cam lock (B) to part (2) to lock it.




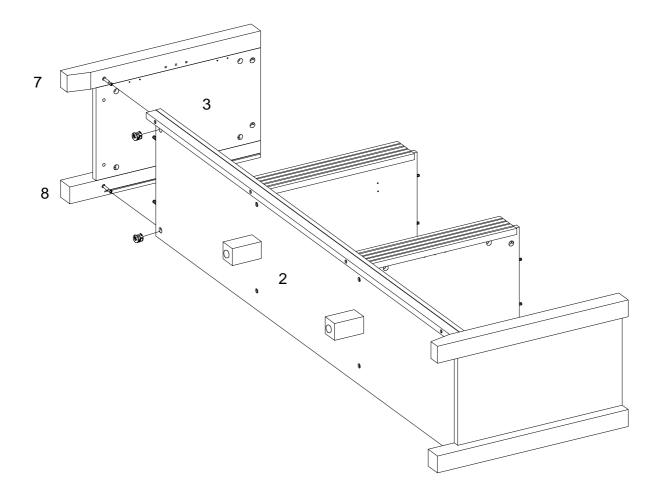


Attach part (7,8) into part (2) and secure cam lock (B) to part (2) to lock it.

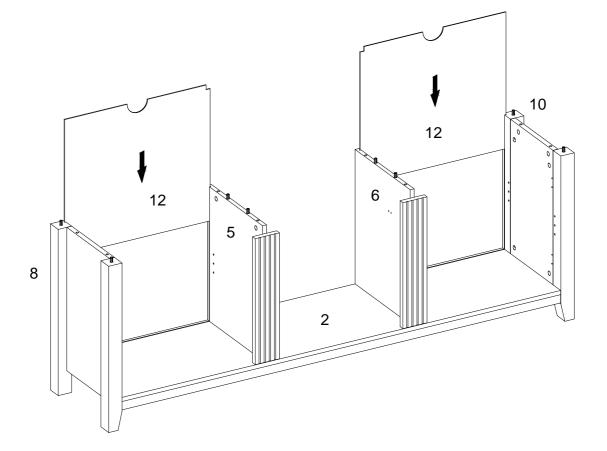


Insert Part(12)into part (8,5,6,10)

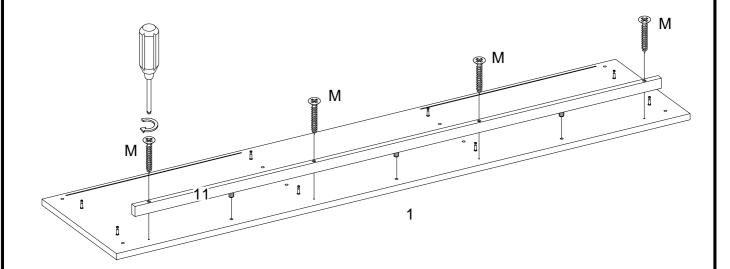


Using screw(M) with screwdriver to secure part (11) into part(1)




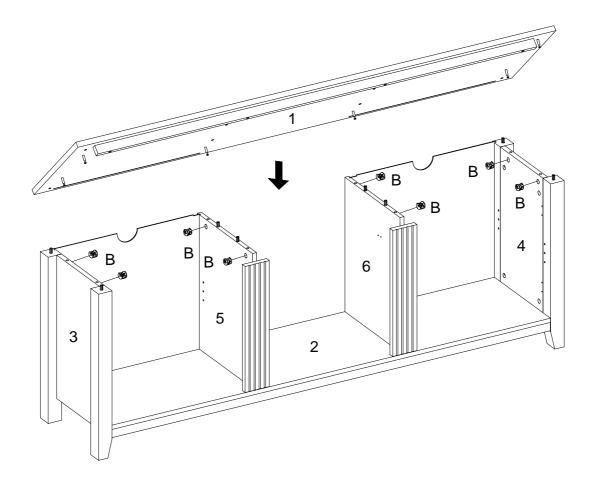


Insert part (1) into part (3,4,5,6), then insert and secure cam lock (B) to part (3,4,5,6) to lock it

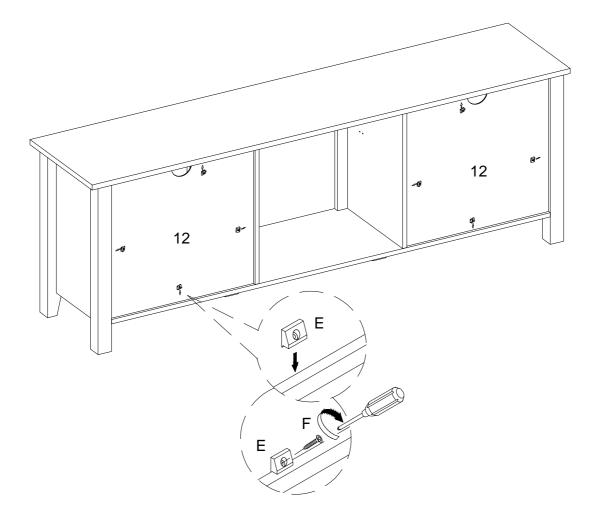


Attach plastic wedge (E) to part (12) using screw (F) with screwdriver.




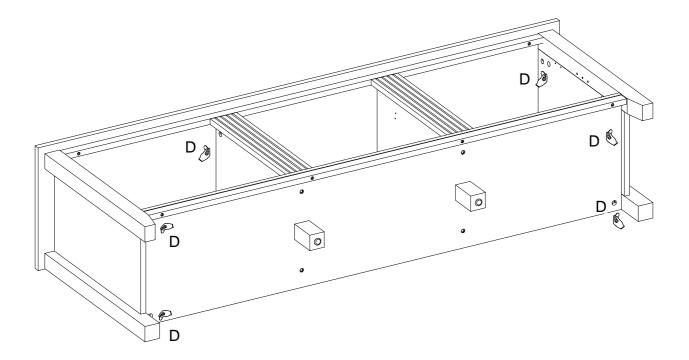


Place sticker (D) over holes as per diagram.

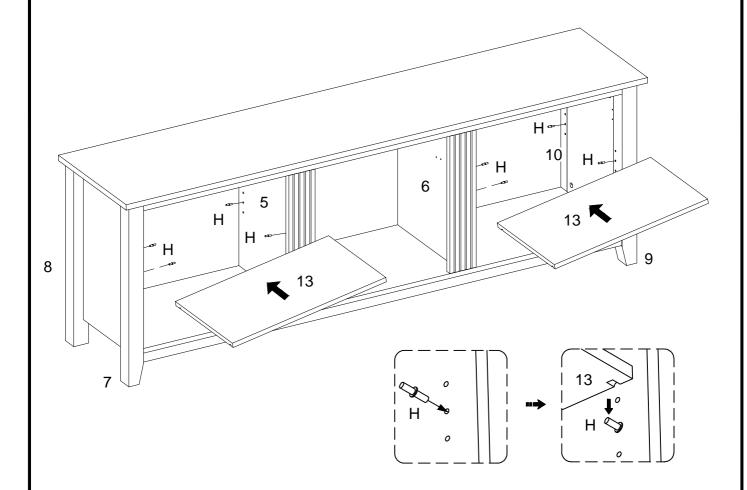


Insert shelf support pin (H) into part (7,5,6,10), then place shelf (13) on top of support pin (H).

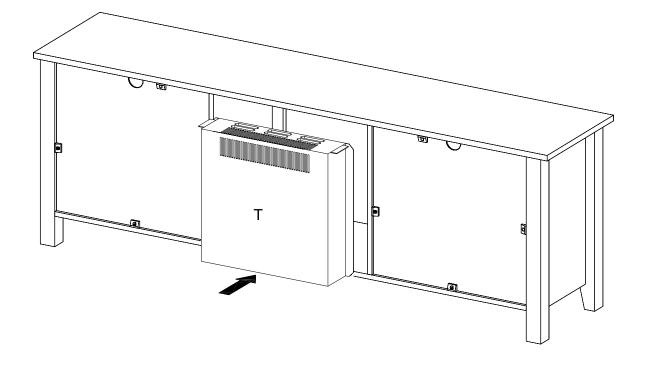


Place fireplace (T) into the frame from the rear.

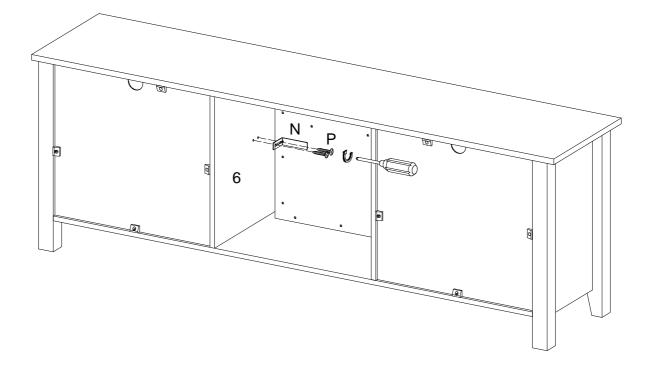


Secure product with screw (P) secure the L Shape Bracket (N) to the Side Panel (6).

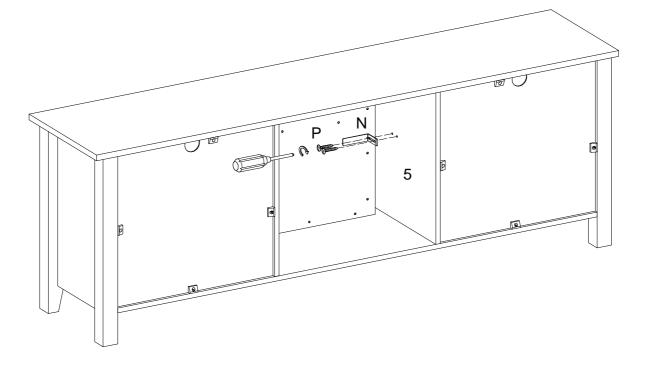


Secure product with screw (P) secure the L Shape Bracket (N) to the Side Panel (5).

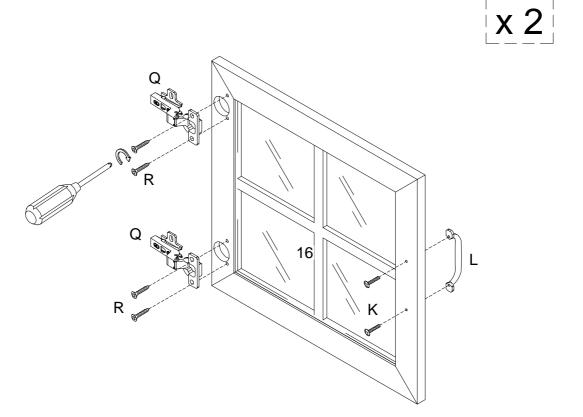


Attach door hinge (Q) to part (16) using screw (R) with screwdriver. Secure Handle (L) with Bolt (K) into the Door

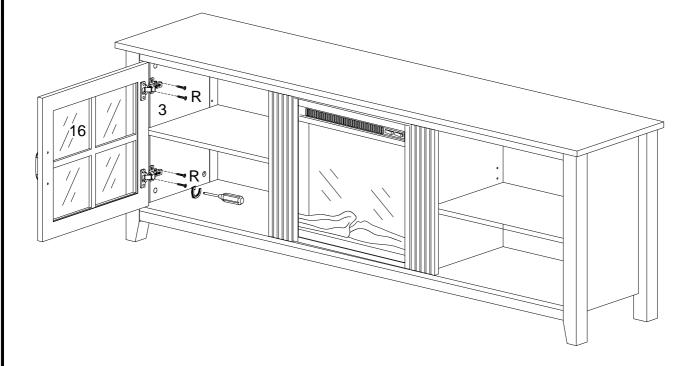

Secure door by tightening door hinge (Q) using screws (R) with equal pressure.

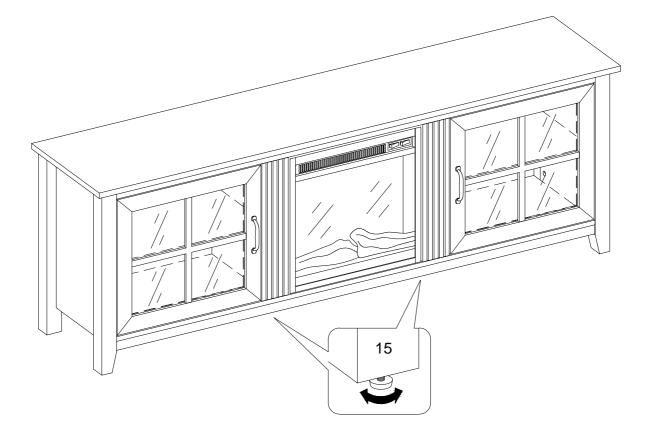

Using Part (15) to adjust the stability .

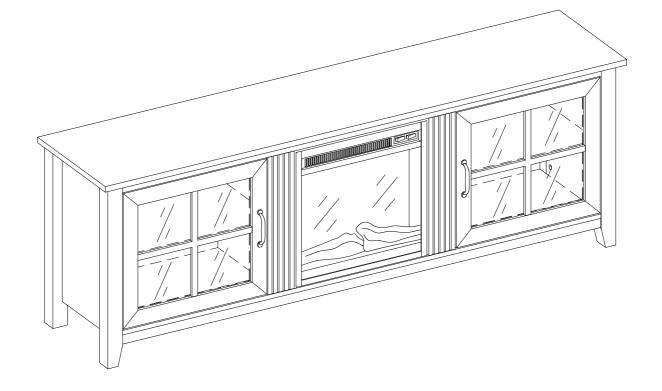

Final Assembly