



Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION

- Available in various finishes identified by suffix
- Fixed mount showerhead only
- Nonmetallic spray face
- Brass swivel ball assembly

OPERATION

- 5 function: rotate outer ring to select

FLOW


- Designed to deliver 2.5 gpm (9.5 L/min) at 60 psi
- EP suffix models are limited to 2.0 gpm (7.6 L/min) at 80 psi

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

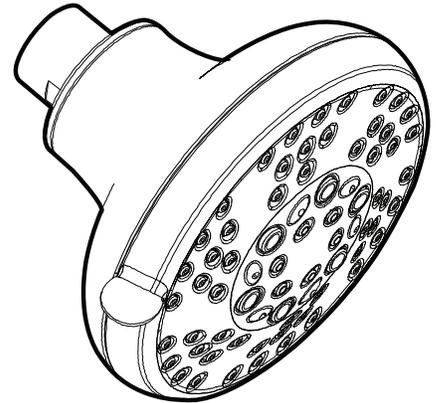

5-Function Showerhead

Models:

26500 series

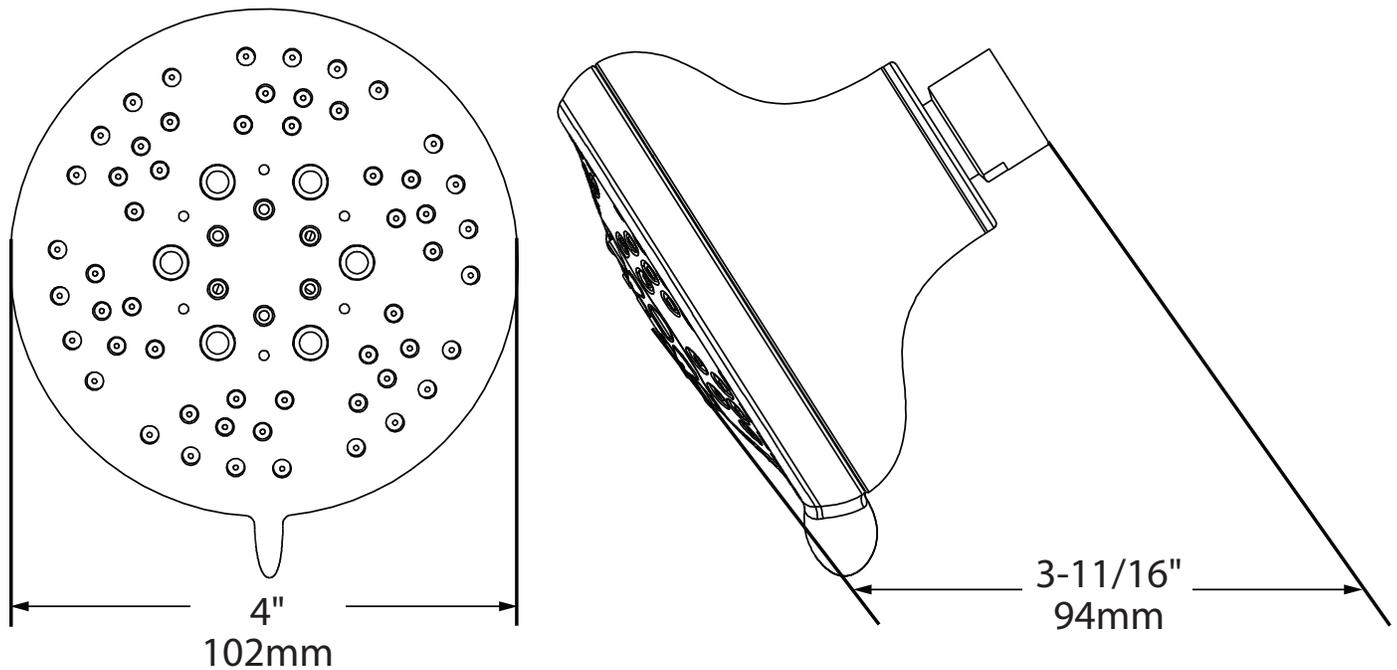

CRITICAL DIMENSIONS

(DO NOT SCALE)