


Features

- Metal construction
- 17-gauge brass pipe
- 30" (762 mm) or 45" (1143 mm) length external cable
- Above- or through-the-floor installation offers installation flexibility
- Includes a tee, drain ell, and overflow ell with attached 1-1/2" OD pipe
- Flexible overflow joint conforms to various bath angles
- Rotary or push handle controls pop-up drain stopper (sold separately)
- No internal linkages to minimize the potential for clogging
- Vibrant PVD finishes available

**CABLE BATH DRAIN
K-37380
ALSO K-37382**

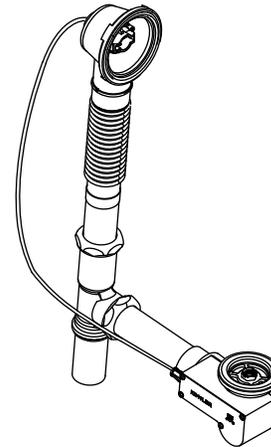

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ASME A112.18.2/CSA B125.2

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model:

Model	Description	Colors/Finishes	
K-37380	Cable bath drain – 30" (762 mm), brass	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-37382	Cable bath drain – 45" (1143 mm), brass	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

Required Accessories			
K-T37391	Cable bath drain trim – Basic Rotary OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-T37392	Cable bath drain trim – Contemporary Rotary OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-T37393	Cable bath drain trim – Traditional Rotary OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-T37394	Cable bath drain trim – Victorian Rotary OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-T37395	Cable bath drain trim – Contemporary Push OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-T37396	Cable bath drain trim – Traditional Push OR	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____
K-T37397	Cable bath drain trim – Victorian Push	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

PRODUCT SPECIFICATION


The cable bath drain shall be of metal construction. Drain shall have a 17-gauge brass pipe. Drain shall include a tee, drain ell, and overflow ell with attached 1-1/2" OD pipe. Drain shall feature 30" (762 mm) or 45" (1143 mm) length external cable, rotary or push handle that controls pop-up drain stopper (sold separately), and flexible overflow joint that will conform to various bath angles. Drain shall have no internal linkages to minimize the potential for clogging. Drain shall feature above- or through-the-floor installation offering installation flexibility. Drain is available with vibrant PVD finishes. Cable bath drain shall be Kohler Model K-_____ -_____.

PUREFLO™

Installation Notes

Install this product according to the installation guide.

The elbow brass pipe subassemblies (noted as L1 and L2 in the Product Diagram) must be cut to correct length.

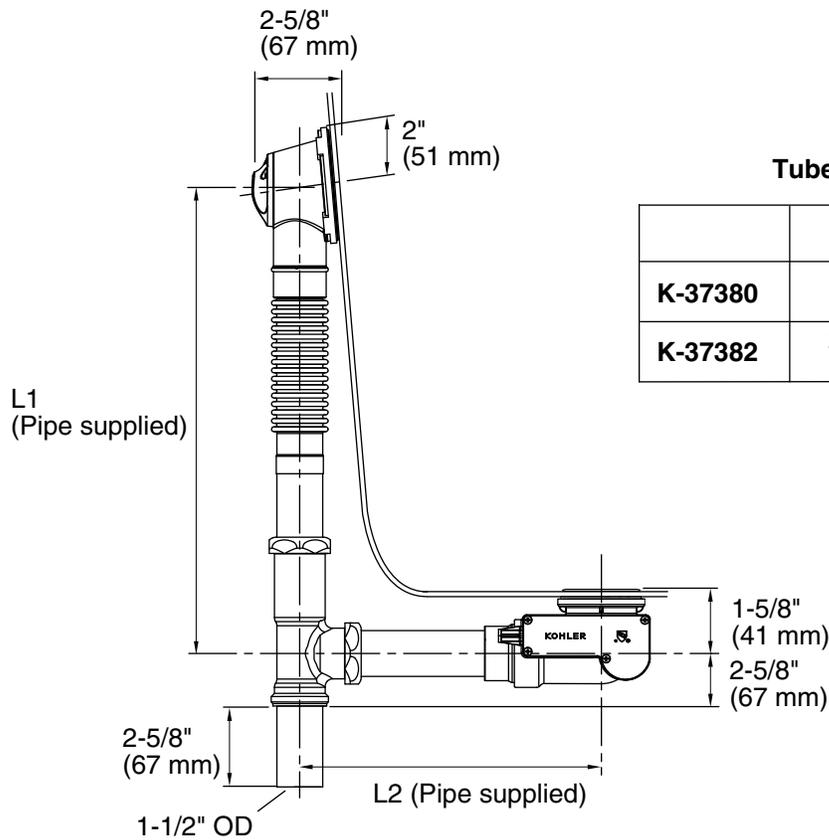

Tube Length Supplied

	L1	L2
K-37380	21" (533 mm)	9-1/2" (241 mm)
K-37382	26" (660 mm)	9-1/2" (241 mm)

Product Diagram