HEADBOARD

ASSEMBLY INSTRUCTIONS

Before assembling your Headboard, please read through these instructions carefully and familiarize yourself with the different parts.



Spare - 1 pc

PARTS LIST

Instructions apply for all bed sizes TWIN > FULL > QUEEN > KING

HARDWARE

HEADBOARD PANEL 1 PC

LEFT LEG 1 PC

RIGHT LEG 1 PC

SPACER BLOCK 2 PCS (1") - 4 pcs (Nooden Dowel - 6 pcs (Nood Screw - 4 pcs (E) JCB M6 X 25mm (1") - 4 pcs Spare - 2 pcs Spare - 1 pc

(B) JCB M6 X 70mm (2 3/4") - 4 pcs

(C) Barrel Nut - 4 pcs Spare - 1 pc

Spare - 1 pc Spare - 1 pc 🥥 **G** Split Washer - 4 pcs Spare - 1 pc


(F) Flat Washer - 4 pcs

(H) Allen Wrench - 1pc Spare - 1pc

NOTE: WE INCLUDE SPARE HARDWARE IN CASE THE ALLEN WRENCH, JCB, BARREL NUT, WOODEN DOWEL, WOOD SCREW, SPLIT OR FLAT WASHER ARE DAMAGED DURING ASSEMBLY.


Step 1


Insert wooden dowels (A) to the locator holes on (1) and (4). Attach the spacer blocks (4) to the legs (2) and (3), using wood screws (D), as shown below. Tighten with Phillips head screwdriver. (Customer Supplied)



Step 2

Attach the legs (2) and (3) to the headboard panel (1), using JCB (B) and barrel nut (C). Tighten with the

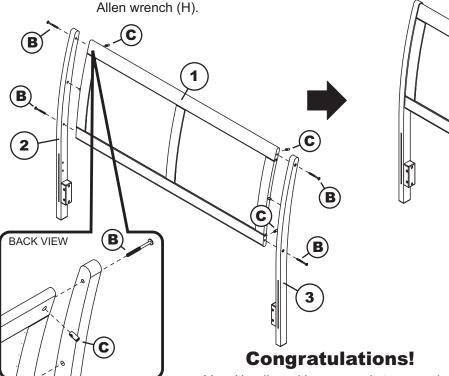



Your Headboard is now ready to assembe.

To ensure lasting safety, we recommend that you periodically check that all screws are tight and all parts are secure.


BED


ASSEMBLY INSTRUCTIONS

Before assembling your Headboard, please read through these instructions carefully and familiarize yourself with the different parts.





Instructions apply for all bed sizes
TWIN > FULL > QUEEN > KING

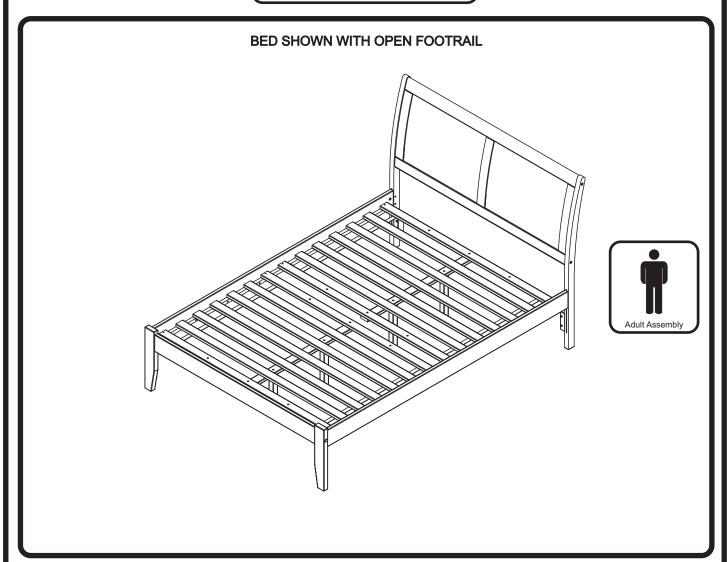


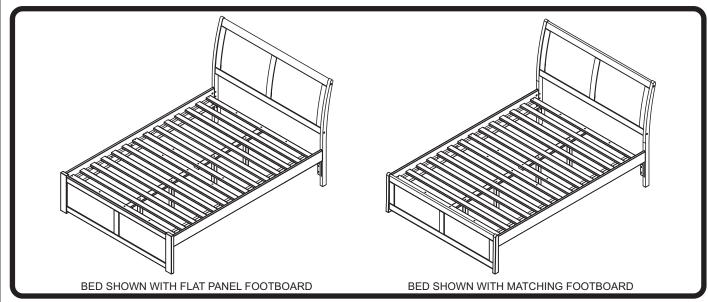


Headboard & Bed Page 2 of 5

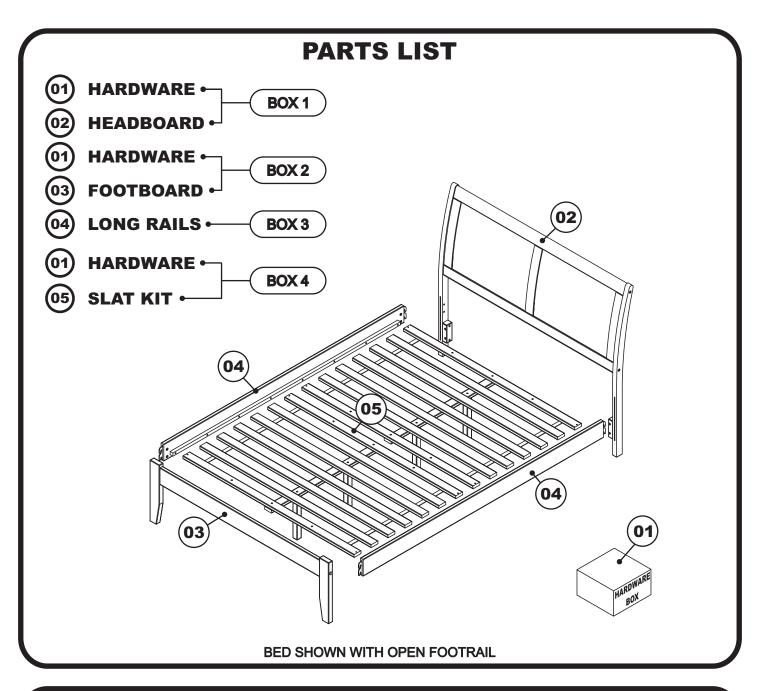

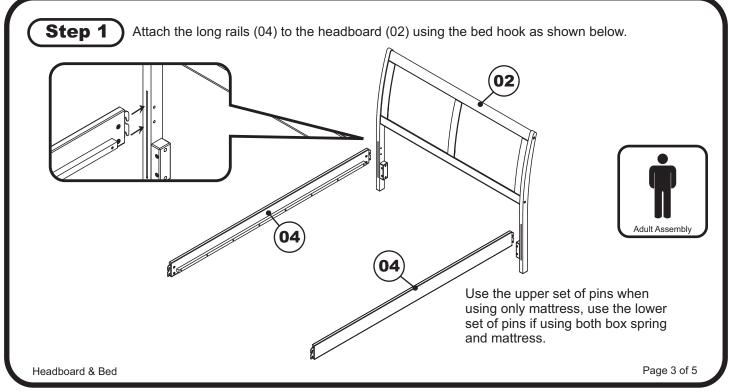

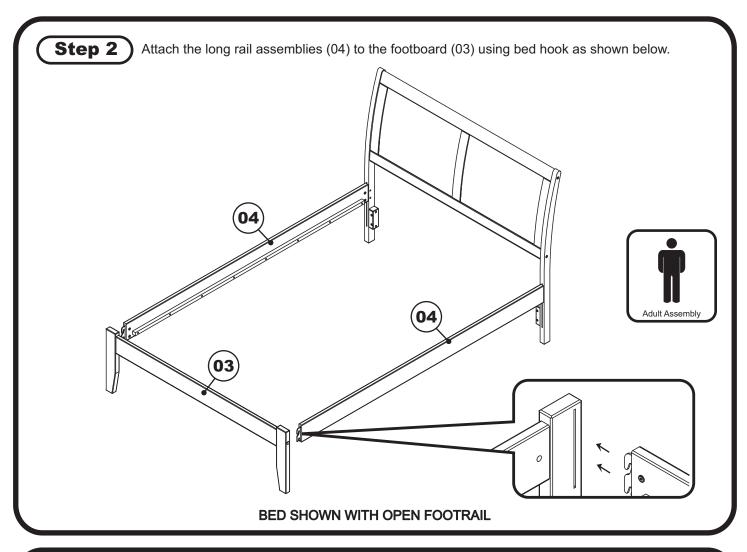

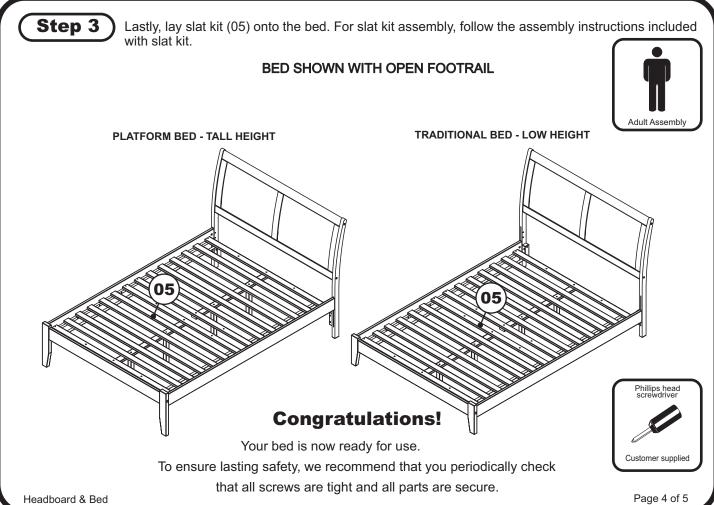

HEADBOARD

attach to metal frame sold separately

ASSEMBLY INSTRUCTIONS

Before assembling your Bed, please read through these instructions carefully and familiarize yourself with the different parts.


Instructions apply for all bed sizes
Twin > Full > Queen > King

PARTS LIST

- (01) HARDWARE
- 02) HEADBOARD



Step 1 Attach the headboard assembly (02) to the metal frame using JCB (E), flat washer (F), and split washer (G) then tighten with Allen wrench, as shown below.

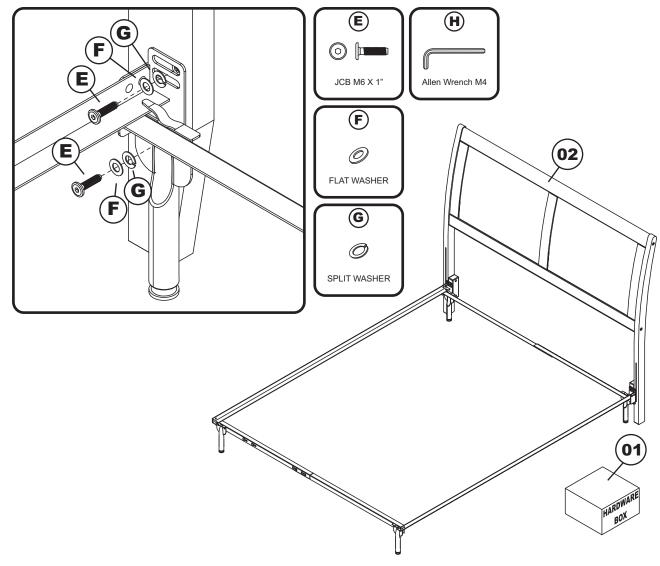

Congratulations!

Your Bed is now ready for use.

To ensure lasting safety, we recommend that you periodically check that all screws are tight and all parts are secure.

Headboard & Bed Page 5 of 5