SF660(P)

	Display size		Max load
	39"- 80"	LB (KG)	**200lb (91kg)**

SMARTMOUNT®
Universal Flat Wall Mount
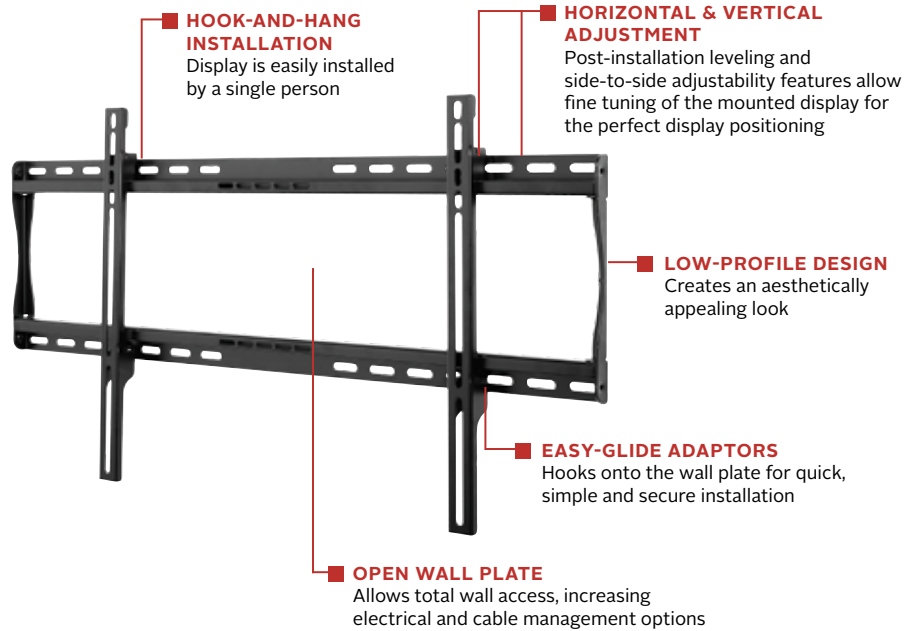## FOR 39" TO 80" DISPLAYS

The SmartMount® Universal Flat Wall Mount series offers the most versatile installation features and mounting options. Horizontal and vertical adjustment abilities allow for post installation leveling and side-to-side positioning, making it easier than ever to find the perfect TV position. The SF660(P) models' low-profile design offers the sleek, aesthetically pleasing look to fit into any décor. Security screws provided in the SF660 models deter tampering and theft. The open wall plate design offers total wall access, increasing the electrical and cable management options. The display can now simply be installed by a single person with the Hook-and-Hang™ system. The Easy-Glide™ adaptors hook onto the wall plate for an overall quick, simple, and secure installation.

The SF660's design positions the display just 1.20" from the wall, perfect for almost any low-profile application.

GET IT RIGHT™

Additional Features

☑ Universal mount fits displays with mounting patterns up to 824 x 405mm (32.44" W x 15.95" H)

☑ Low-profile design holds display only 1.20" (30mm)

☑ Up to 0.25" (6mm) of vertical adjustment on each universal display adaptor bracket for post-installation leveling and height adjustment fine-tuning

☑ Horizontal display adjustment up to 8.00" (203mm) for centering display on wall

☑ Mounts to wood studs, concrete, cinder block or metal studs (metal stud accessory required)

☑ Includes all necessary wall and display attachment hardware

☑ Integrated security options available

☑ Design is UL listed and tested to four times stated load capacity

HOOK-AND-HANG INSTALLATION
Display is easily installed by a single person

HORIZONTAL & VERTICAL ADJUSTMENT
Post-installation leveling and side-to-side adjustability features allow fine tuning of the mounted display for the perfect display positioning

LOW-PROFILE DESIGN
Creates an aesthetically appealing look

EASY-GLIDE ADAPTORS
Hooks onto the wall plate for quick, simple and secure installation

OPEN WALL PLATE
Allows total wall access, increasing electrical and cable management options

Low-profile design for a sleek, yet compact installation

Comes in color packaging with included installation hardware and easy to follow instructions.

cULus RoHS oshpd

peerless-AV®

Model Numbers

SF660P	SmartMount® Universal Flat Wall Mount for 39" to 80" Displays - standard models
SF660	SmartMount® Universal Flat Wall Mount for 39" to 80" Displays - security models

Product Specifications

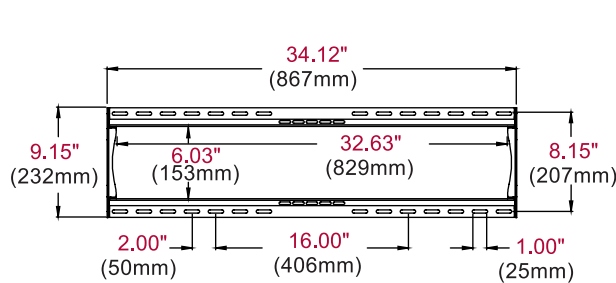|	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
SF660(P)	34.12" x 16.89" x 1.20" (867 x 429 x 30mm)	5.60lb (2.54kg)	200lb (91kg)	Scratch resistant fused epoxy	Semi-gloss black

Package Specifications

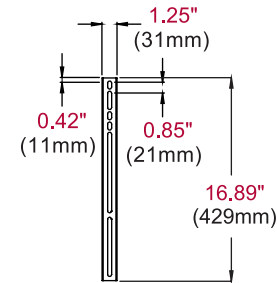|	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
SF660(P)	36.41" x 1.57" x 10.71" (925 x 40 x 272mm)	7.60lb (3.45kg)	SF660: 735029235590 SF660P: 735029235620	Wall mount, wall and display installation hardware, installation instructions	1

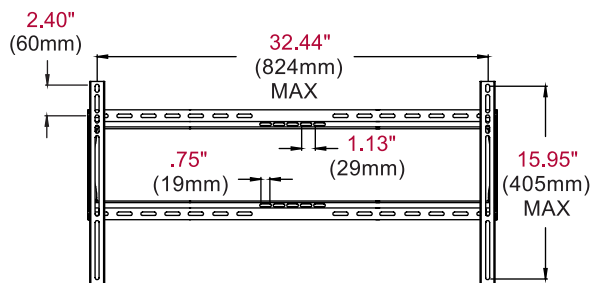## Accessories

**ACC415:**   Metal Stud Fastener Kit

All dimensions = inch (mm)

WALL PLATE

VERTICAL ADAPTOR

FRONT VIEW

SIDE VIEW

Architect Specifications

The Smartmount® Universal Flat Wall Mount shall be a Peerless-AV model SF660(P) and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit **peerless-av.com** to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502 USA

(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV Europe
Unit 3 Watford Interchange
Colonial Way, Watford
Herts, WD24 4WP
United Kingdom

+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV de México
Ave de las Industrias 413
Parque Industrial Escobedo
Escobedo, N.L.,
Mexico 66050

+52 (81) 8384-8300
Fax: +52 (81) 8384-8360

peerless-AV®

LIT-0595 rev.4