


# OPERATION MANUAL

## LED Flush Mount Light

With integrated dimmable driver

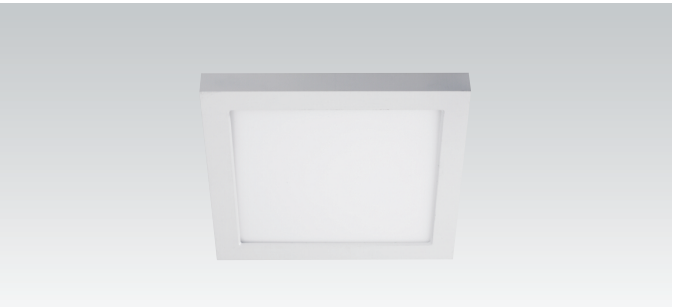

Thank you for purchasing our product. The device has been manufactured from components with advanced optoelectronics to ensure high reliability and long performance. Before assembling please carefully read this Operation Manual and save in a safe place for future reference. Please note that all electrical connections must be in accordance with local and National Electrical Code standards as well as local building code. In case you are not familiar with proper wiring connections and building codes consult a qualified electrician.

### Technical Data

Power Consumption: 10.5W/13.5W/18.5W  
Color temp.: 2700K/3000K/5000K  
Life Span: 40,000h  
Illumination authorization < 5%  
per 10,000h

### SAFETY RECOMMENDATIONS

1. RISK OF ELECTRIC SHOCK – THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH MENTIONED ABOVE CODES AND HAZARDS INVOLVED. DISCONNECT POWER AT CIRCUIT BREAKER OR FUSE BEFORE INSTALLING OR SERVICING.
2. Before use of the product read carefully the whole Operation Manual.
3. THE PRODUCT IS PURPOSED FOR INTERIOR USE ONLY. SUITABLE FOR DAMP LOCATIONS
4. Protect the product against direct contact with water.
5. Assemble the product only with the use of parts provided and the housing; improper assembly may result in device falling which could damage the product, personal property or cause injury.
6. Assembly shall follow with accessories delivered with the set only.
7. The device is not a toy. KEEP OUT OF REACH OF CHILDREN.




This product meets the ENERGY STAR® guidelines for energy efficiency.

### INSTALLATION (Seven simple steps.)



STEP1

Δ Turn-off / disconnect power at circuit breaker



STEP2

Attach connector (provided) to AC cable from Junction Box



STEP3

Remove the installation bracket from the back of the fixture and attach it to Junction box using the 2 screws (provided) – pull the AC cable with connector through the bracket center hole



STEP4

Connect AC cable from the Junction Box to the cable from the light fixture




STEP5

Raise fixture and push the AC cable into Junction Box



STEP6

Align slots on the edge of fixture with the ball bearings on the mounting bracket and PUSH to lock fixture in place.



STEP7

Installed – Congratulations... Enjoy the light!

### DIMMING

This product is compatible with most residential type dimmers available on the market. The dimming performance will depend on kind of dimmer and dimmer settings.

### CLEANING AND STORAGE

- Clean with a soft or damp cloth. While cleaning with the damp cloth make sure the power is off.
- Do not clean with liquids or abrasives.
- Store at ambient temperature.

### LIMITED WARRANTY